


Cisco.350-601.v2022-05-10.q129

Exam Code:	350-601
Exam Name:	Implementing Cisco Data Center Core Technologies (350-601 DCCOR)
Certification Provider:	Cisco
Free Question Number:	129
Version:	v2022-05-10
# of views:	3167
# of Questions views:	1290
https://www.exam-tests.com/350-601-exam/Cisco.350-601.v2022-05-10.q129.html	

NEW QUESTION: 1

An engineer installed a new Nexus switch with the mgm0interface in vrf management. Connectivity to the rest of the network needs to be tested from the guest shell of the NX-OS. Which command tests connectivity from the shell of the NX-OS?

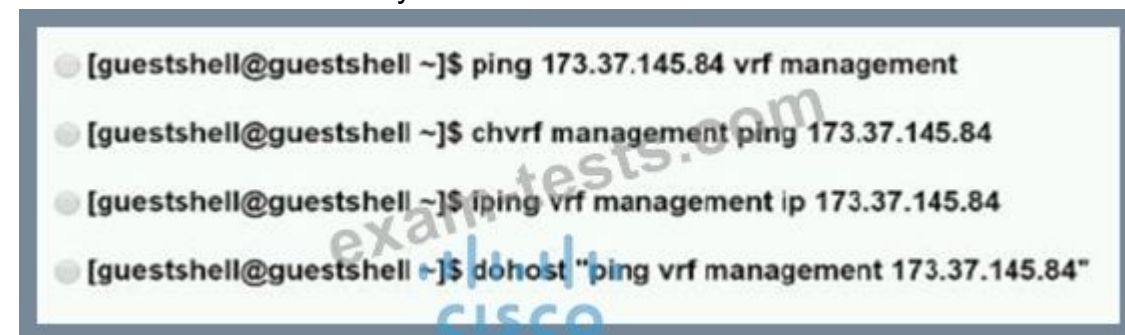

- A. Option B
- B. Option D
- C. Option A
- D. Option C

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 2

A server engineer wants to control power uses on a Cisco UCS C-series rack server down to the component level. Which two components support specific power limits? (Choose two.)

- A. network controller
- B. storage controller
- C. processor
- D. graphic card
- E. memory

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 3

An engineer is implementing OTV on a transport that supports multicast. The solution needs to meet the following requirements:

- * Establish adjacency to the remote peer by using multicast.
- * Enable OTV advertisements for VLAN 100 to the other site.

Which two commands should be configured to meet these requirements? (Choose two.)

- A. otv extend-vlan 100
- B. otv control-group 232.1.1.1
- C. otv use-adjacency-server 172.27.255.94
- D. otv data-group 232.2.2.0/28
- E. otv site-vlan 100

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 4

Which MAC address is an HSRP version 2?

- A. 0100.5E7F.FFFF
- B. 3799.9943 3000
- C. 0000.0C9F.F0C8
- D. 0000.0C07.AC1H

Answer: C ([LEAVE A REPLY](#))

Reference:

https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/ipapp_fhrp/configuration/xr-3s/fhrp-xr-3s-book/fhrp-hsrp-v2.html

NEW QUESTION: 5

An engineer changed a configuration and must perform a rollback.

Which statement applies to a Cisco Nexus 5600 Series Switch?

- A. The configuration rollback functionality is disabled when FCoE is enabled.
- B. A system checkpoint is generated automatically when the running configuration is saved to NVRAM.
- C. A user who is assigned to the network-operator user role can perform a rollback.
- D. Errors are skipped when an atomic rollback type is triggered.

Answer: A ([LEAVE A REPLY](#))

Section: Compute

NEW QUESTION: 6

A network architect must redesign a data center on OSPFv2. The network must perform fast reconvergence between directly connected switches. Which two actions must be taken to meet the requirement? (Choose two)

- A. Configure all links on AREA 0.
- B. Enable BFD for failure detection.
- C. Implement a virtual link between the switches.
- D. Set low OSPF hello and DEAD timers.
- E. Use OSPF point-to-point links only.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 7

A Cisco MDS 9000 series storage Switch has reloaded unexpectedly. Where does the engineer look for the latest core dump file?

- A. /mnt/logs
- B. /mnt/recovery
- C. /mnt/core
- D. /mnt/pss

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 8

An engineer has a primary fabric that is named UCS-A and a secondary fabric that is named UCS-B. A certificate request that has a subject name of sjc2016 for a keyring that is named kr2016 needs to be created.

The cluster IP address is 10.68.68.68. Which command set creates this certificate request?

A)

```
UCS-A # scope keyring kr2016
UCS-A /keyring # create certreq 10.68.68.68 sjc2016
UCS-A /keyring* # commit-buffer
```

B)

```
UCS-A# scope security
UCS-A /security # scope keyring kr2016
UCS-A /security/keyring # create certreq ip 10.68.68.68 subject-name sjc2016
UCS-A /security/keyring* # commit-buffer
```

C)

```
UCS-A# scope security
UCS-A /security # scope keyring kr2016
UCS-A /security/keyring # create certreq ip 10.68.68.68 subject-name sjc2016
UCS-A /security/keyring* # commit-buffer
```

D)

```
UCS-B # scope keyring kr2016
UCS-B /keyring # create certreq ip 10.68.68.68 subject-name sjc2016
UCS-B /keyring* # commit-both
```

- A. Option A
- B. Option D
- C. Option B
- D. Option C

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 9

What is an advantage of NFS as compared to Fibre Channel?

- A. NFS removes the impact of IP overhead.
- B. NFS enables thin provisioning for LUNs.
- C. NFS provides direct access to the underlying storage hardware.
- D. NFS provides the dynamic allocation of storage capacity.

Answer: ([SHOW ANSWER](#))

Section: Storage Network

NEW QUESTION: 10

Which two configuration settings are available in the in the cisco UCS flmware Auto sync server policy?

- A. User Notification
- B. User Acknowledge
- C. No Action
- D. Delayed Action
- E. Immediate Action

Answer: ([SHOW ANSWER](#))

Explanation

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/firmware-mgmt/gui/2-2/b_GUI_Firmware_Ma Following are the values for the Firmware Auto Sync Server policy: * User Acknowledge-Firmware on the server is not synchronized until the administrator acknowledges the upgrade in the Pending Activities dialog box. * No Action-No firmware upgrade is initiated on the server.

NEW QUESTION: 11

Refer to the exhibit.

```
NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The TACACS+ server uses the type-6 encrypted format.
- B. The switch queries the TACACS+ server by using a clear text PAP login.
- C. The timeout value on the TACACS+ server is 10 seconds.
- D. The switch queries the TACACS+ server by using an encrypted text PAP login.

Answer: B ([LEAVE A REPLY](#))

Explanation

<https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/93x/security/configuration/guide/b-cis> The command "deadtime" is in minutes, not in seconds.

By default, the Cisco NX-OS device uses Password Authentication Protocol (PAP) authentication between the Cisco NX-OS device and the remote server. If you enable CHAP, you need to configure your RADIUS or TACACS+ server to recognize the CHAP vendor-specific attributes (VSAs).

Introduction

Point-to-Point Protocol (PPP) currently supports two authentication protocols: Password Authentication Protocol (PAP) and Challenge Handshake Authentication Protocol (CHAP). Both are specified in RFC 1334 and are supported on synchronous and asynchronous interfaces.

- PAP provides a simple method for a remote node to establish its identity using a two-way handshake. After the PPP link establishment phase is complete, a username and password pair is repeatedly sent by the remote node across the link (in clear text) until authentication is acknowledged, or until the connection is terminated.
- PAP is not a secure authentication protocol. Passwords are sent across the link in clear text and there is no protection from playback or trial-and-error attacks. The remote node is in control of the frequency and timing of the login attempts.

For more information on troubleshooting PPP authentication (using either PAP or CHAP), refer to Troubleshooting PPP (CHAP or PAP) Authentication for a complete, step-by-step flow chart for troubleshooting the PPP authentication phase. For more information on troubleshooting all the PPP phases (LCP, Authentication, NCP), refer to document PPP Troubleshooting Flowchart for a complete flowchart for step-by-step troubleshooting of all related PPP phases and negotiated parameters.

NEW QUESTION: 12

An engineer is implementing an import operation in Cisco UCS Manager. What is the impact of performing this operation?

- A. A configuration can be imported from a higher release to a lower release.
- B. Information can be modified on the management plane only.
- C. Only a configuration file that was exported from the same Cisco UCS Manager can be imported.
- D. An import operation can be scheduled.

Answer: (SHOW ANSWER)

The import function is available for all configuration, system configuration, and logical configuration files. You can perform an import while the system is up and running. An import operation modifies information on the management plane only. Some modifications caused by an import operation, such as a change to a vNIC assigned to a server, can cause a server reboot or other operations that disrupt traffic.

https://www.cisco.com/en/US/docs/unified_computing/ucs/sw/gui/config/guide/141/UCSM_GUI_Configuration_Guide_141_chapter43.html#concept_D789E16C90724AEFB99D565574E45AD5

NEW QUESTION: 13

A customer has a requirement for an automation solution that supports periodically acquiring configuration from a centralized server and aligning UCS servers to their desired state.

Which open-source tool meets this requirement?

- A. SaltStack
- B. Kubernetes
- C. Puppet
- D. Terraform

Answer: (SHOW ANSWER)

Section: Automation

NEW QUESTION: 14

Which adjacency server configuration makes two OTV edge devices located in the same site bring up the dual-site adjacency?

- A)

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv use-adjacency-server 20.1.1.2 unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv use-adjacency-server 20.1.1.1 unicast-only
otv join-interface Ethernet1/2
```

B)

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv join-interface Ethernet1/2
otv adjacency-server unicast-only
otv use-adjacency-server 20.1.1.1 unicast-only
```

C)

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

D)

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

A. Option A

- Answer: C (LEAVE A REPLY)**

APIC EPG Resolution Immediacy is set to "Immediate".

A. If "On demand" is selected, the policy is programmed in the hardware only when the first packet is received through the data path.

- Answer: A (LEAVE A REPLY)**

NEW QUESTION: 16

The subnet is already present in the ARP table of the Cisco Nexus switch. Drag and drop the bash commands to generate the desired output. Not all commands are used.

Answer:

Explanation

Graphical user interface, text, application Description automatically generated

```
bash-4.3$ vsh | grep "^10\." | vsh -c "show ip arp" | sed -e 's/ping /10./g' | awk '{print "ping " $1}'
--- 10.1.0.2 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
--- 10.1.0.77 ping statistics ---
5 packets transmitted, 0 packets received, 100.00% packet loss
```

show ip arp

egrep "statistics|loss"

grep -v "statistics|loss"



Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:
<https://www.braindumps.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

An engineer is asked to manage a large-scale data center and collect information from multiple Cisco NX-OS devices using Cisco NX-OS Data Management Engine model. Which technology should be used to accomplish this goal?

- A. NETCONF
- B. NX-API REST
- C. NX Yang
- D. JSON-RPC

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 18

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```


What be connected to clear the HA NOT READY status?

- A. Layer 1-Layer 2 ports
- B. network uplinks
- C. management ports
- D. server chassis

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 19

An engineer configures the netflow feature on a Cisco NX-OS device. The requirement is to reduce the amount of export data collected by using a sampler. Drag and drop the netflow configuration steps from the left onto implemented needed to meet these requirements on the right. Not all steps are used.

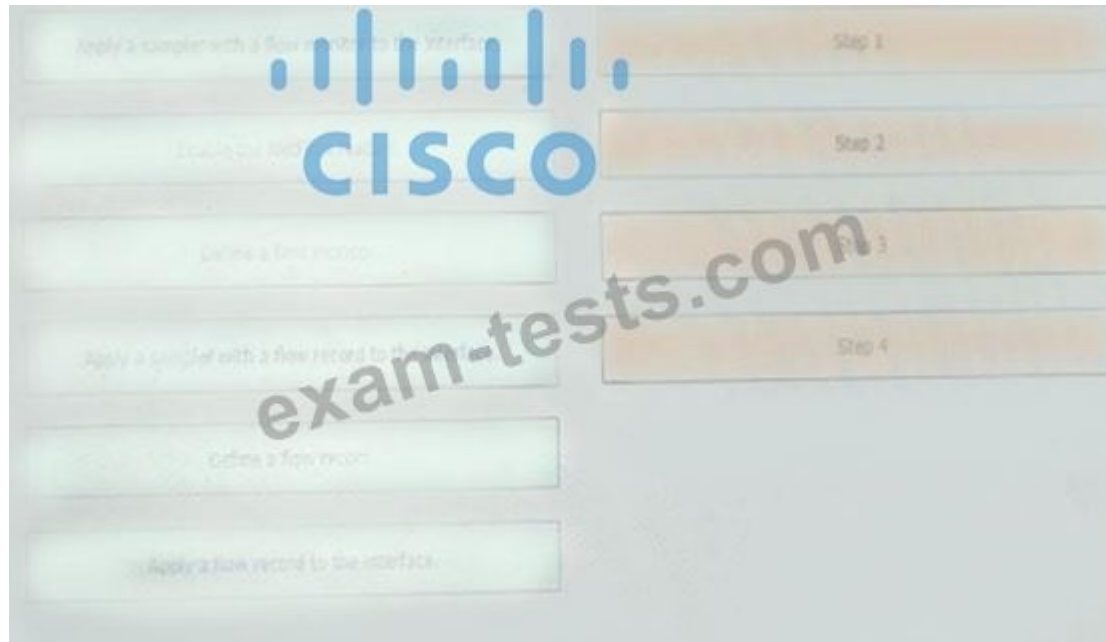

Answer:

Apply a sampler with a flow monitor to the interface.

Enable the NetFlow feature.

Define a flow monitor.


Apply a sampler with a flow record to the interface.

Define a flow record.

Using a flow monitor.

Apply a flow record to the interface.

CISCO

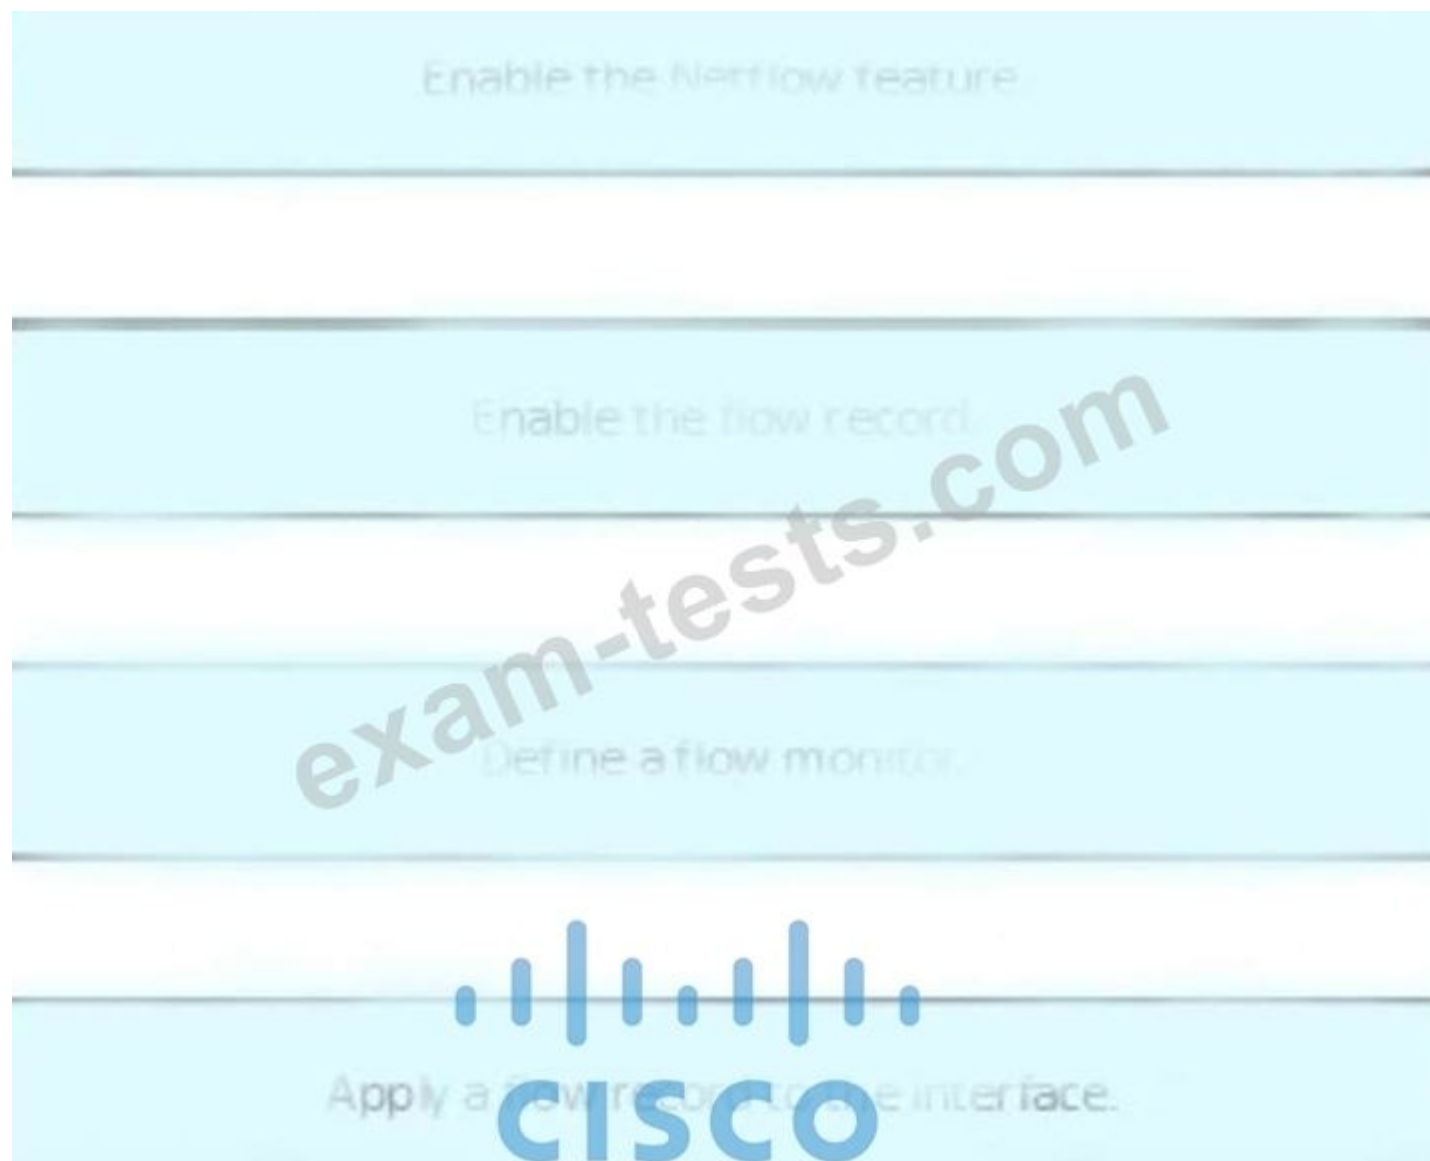

NEW QUESTION: 20

An engineer is seeking the most optimal on demand CPU performance while configuring the BIOS settings of UCS C-series rack mount server.

- A. C0/C1 state
- B. C6 non-Retention
- C. C6 Retention
- D. C2 state

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 21

Which service profile is affected if the default host firmware policy in Cisco UCS Manager is changed?

- A. any service profile that has no host firmware policy defined
- B. any service profile that uses a user-created host firmware policy
- C. any service profile that is not in the root sub-org
- D. any service profile that uses the global-default host firmware policy


Answer: A ([LEAVE A REPLY](#))

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Firmware-Mgmt/3-1/b_UCSM_GUI_Firmware_Management_Guide_3_1/b_UCSM_GUI_Firmware_Management_Guide_3_1_chapter_011.html

NEW QUESTION: 22

Which adjacency server configuration makes two OTV edge devices located in the same site bring up the dual-site adjacency?

A)

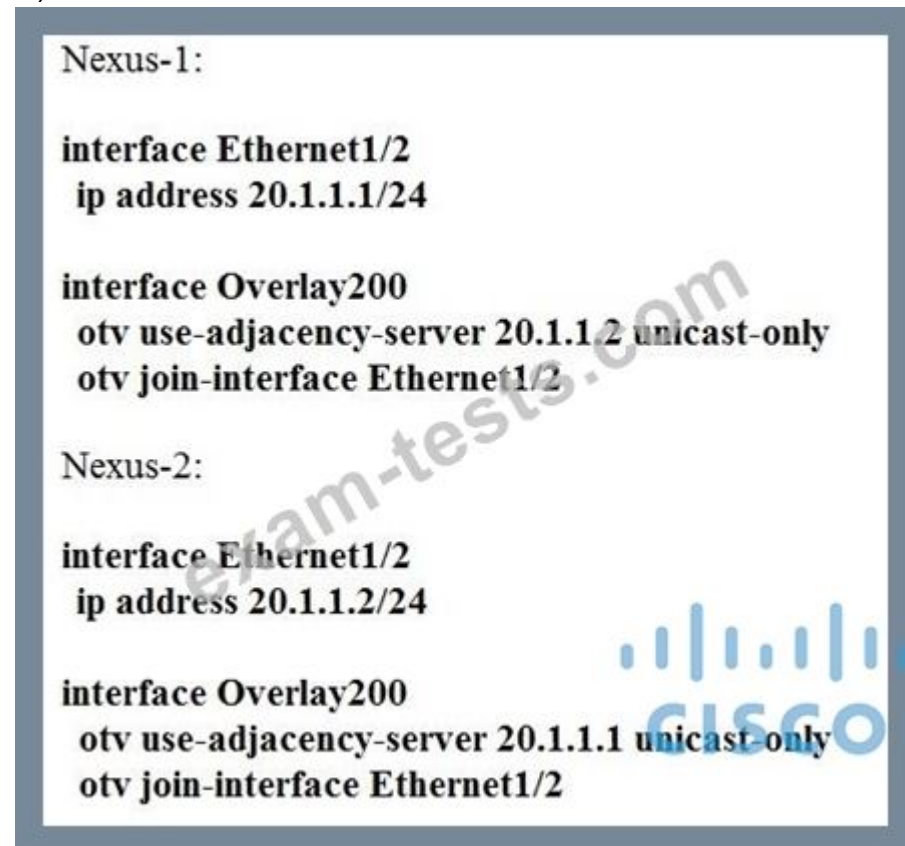

B)

Nexus-1:

```
interface Ethernet1/2
ip address 20.1.1.1/24
```

```
interface Overlay200
otv adjacency-server unicast-only
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
ip address 20.1.1.2/24
```

```
interface Overlay200
otv join-interface Ethernet1/2
otv adjacency-server unicast-only
otv use-adjacency-server 20.1.1.1 unicast-only
```

C)

Nexus-1:

```
interface Ethernet1/2
 ip address 20.1.1.1/24
```

```
interface Overlay200
 otn adjacency-server unicast-only
 otn join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
 ip address 20.1.1.2/24
```

```
intevrface Overlay200
 otn adjacency-server unicast-only
 otn join-interface Ethernet1/2
```

D)

Nexus-1:

```
interface Ethernet1/2
 ip address 20.1.1.1/24
```

```
interface Overlay200
 otn adjacency-server unicast-only
 otn join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2
 ip address 20.1.1.2/24
```

```
intevrface Overlay200
 otn adjacency-server unicast-only
 otn join-interface Ethernet1/2
```

- A. Option A
- B. Option D
- C. Option C
- D. Option B

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 23

A network engineer is asked to describe the cloud infrastructure models from the perspective of their operation and access to resources. Drag and drop the descriptions from the left onto the appropriate.

The interface shows two columns of boxes. The left column contains four descriptions of cloud models, and the right column contains four cloud model names. The descriptions are: 'Provisioned for open use.', 'At least two or more separate cloud infrastructures are connected together to facilitate hosted data and application portability.', 'Owned, managed, and operated by one or more organizations or teams.', and 'Owned, managed, and operated by a single organization.' The cloud model names are: 'Private cloud', 'Community cloud', 'Public cloud', and 'Hybrid cloud'. A large 'CISCO' watermark is visible across the interface.

Descriptions	Cloud Models
Provisioned for open use.	Private cloud
At least two or more separate cloud infrastructures are connected together to facilitate hosted data and application portability.	Community cloud
Owned, managed, and operated by one or more organizations or teams.	Public cloud
Owned, managed, and operated by a single organization.	Hybrid cloud

Answer:

The interface shows the same two columns of boxes as before, but with dashed lines indicating the correct matches between descriptions and cloud models. The matches are: 'Provisioned for open use.' to 'Public cloud', 'At least two or more separate cloud infrastructures are connected together to facilitate hosted data and application portability.' to 'Hybrid cloud', 'Owned, managed, and operated by one or more organizations or teams.' to 'Community cloud', and 'Owned, managed, and operated by a single organization.' to 'Private cloud'. A large 'CISCO' watermark is visible across the interface.

Descriptions	Cloud Models
Provisioned for open use.	Public cloud
At least two or more separate cloud infrastructures are connected together to facilitate hosted data and application portability.	Hybrid cloud
Owned, managed, and operated by one or more organizations or teams.	Community cloud
Owned, managed, and operated by a single organization.	Private cloud

Explanation

Private Cloud: owned, managed, and operated by a single organization.

Community Cloud: Owned, managed, and operated by one or more organizations or teams.

Public Cloud: Provisioned for open use.

Hybrid Cloud: At least two or more separate cloud infrastructures are connected together to facilitate hosted data and application portability.

NEW QUESTION: 24

Host 1 is in VLAN 100 located in DataCenter 1 and Host2 is in VLAN200 located in DataCenter2. Which OTV VLAN mapping configuration allows Layer 2 connectivity between these two hosts?

A. DC1:
interface Overlay1
otv extend-vlan 100
otv vlan mapping 100 to 200

DC2:
interface Overlay1
otv extend-vlan 100
otv vlan mapping 100 to 200

B. DC1:
interface Overlay1
otv extend-vlan 100
otv vlan mapping 100 to 200

DC2:
interface Overlay1
otv extend-vlan 200

C. DC1:
interface Overlay1
otv extend-vlan 100

DC2:
interface Overlay2
otv extend-vlan 200

D. DC1:
interface Overlay1
otv extend-vlan 100

DC2:
interface Overlay1
otv extend-vlan 200

A. Option B

B. Option D

C. Option C

D. Option A

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 25

Refer to the exhibit.

```
NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The timeout value on the TACACS+ server is 10 seconds.
- B. The TACACS+ server uses the type-6 encrypted format.
- C. The switch queries the TACACS+ server by using an encrypted text PAP login.
- D. The switch queries the TACACS+ server by using a clear text PAP login.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 26

Refer to the exhibit. VLAN 10 is experiencing delays and packet drops when the traffic is forwarded through the switch. The destination flow analyzer accepts traffic captures of not more than 30 seconds. Which configuration implements the traffic capture that meets the requirements?

- switch(config)# flow timeout 30000
switch(config)# interface ethernet 1/1
switch(config-if)# switchport
switch(config-if)# switchport access vlan 10
switch(config-if)# ip flow monitor L2_monitor output
- switch(config)# flow timeout 30
switch(config)# interface ethernet 1/1
switch(config-if)# switchport
switch(config-if)# switchport access vlan 10
switch(config-if)# mac packet-classify
switch(config-if)# layer2-switched flow monitor L2_monitor input
- switch(config)# interface ethernet 1/1
switch(config-if)# flow timeout 30
switch(config-if)# switchport access vlan 10
switch(config-if)# mac packet-classify
switch(config-if)# ip flow monitor L2_monitor input
- switch(config)# interface ethernet 1/1
switch(config)# flow timeout 30000
switch(config-if)# switchport
switch(config-if)# layer2-switched flow monitor L2_monitor output
switch(config-if)# switchport access vlan 10

- A. Option C
- B. Option D
- C. Option B
- D. Option A

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 27

An engineer is implementing OTV on a transport that supports multicast. The solution needs to meet the following requirements:

- * Establish adjacency to the remote peer by using multicast.
- * Enable OTV advertisements for VLAN 100 to the other site.

Which two commands should be configured to meet these requirements? (Choose two.)

- A. otv extend-vlan 100
- B. otv site-vlan 100
- C. otv use-adjacency-server 172.27.255.94
- D. otv data-group 232.2.2.0/28
- E. otv control-group 232.1.1.1

Answer: ([SHOW ANSWER](#))

Section: Network

Explanation/Reference:

<https://www.ciscopress.com/articles/article.asp?p=2999385&seqNum=2>

NEW QUESTION: 28

Refer to the exhibit.

```
FI-1# scope org /  
FI-1 /org # create maint-policy maintenance  
FI-1 /org/maint-policy* # set reboot-policy timer-automatic  
FI-1 /org/maint-policy* # set soft-shutdown-timer never
```

Which action must be taken before the maintenance policy can be committed?

- A. Set the policy to apply the change on the next reboot.
- B. Specify a maintenance time by selecting a schedule.
- C. Set the soft shutdown timer to a specific time.
- D. Associate a service profile to the maintenance policy.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 29

Refer to the exhibit.

```
interface Ethernet1/1  
  description Server1  
interface Ethernet1/2  
  description Server2  
interface Ethernet1/3  
  description Server3  
interface Ethernet1/4  
  description Server4  
interface Ethernet1/5  
  description Server5
```

Which command is run from the Guest Shell to set the description on the first five interfaces of the Cisco Nexus switch?

- ☐ [guestshell@guestshell ~]\$ for x in (1..5); do dohost "conf t" ; "interface eth1/\$x" ; "description Server\$x" ; done
- ☐ [guestshell@guestshell ~]\$ for x in (1..5); dohost "conf t ; interface eth1/\$x ; description Server\$x";
- ☐ [guestshell@guestshell ~]\$ for x in {1..5}; dohost "conf t ; interface eth1/\$x ; description Server\$x" ;
- ☐ [guestshell@guestshell ~]\$ for x in (1..5); do dohost "conf t ; interface eth1/\$x ; description Server\$x" ; done

A. Option B

B. Option C

C. Option D

D. Option A

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 30

Refer to the exhibit.



Which backup operation type does not include the Preserve Identities feature?

A. full state

B. all configuration

C. logical configuration

D. system configuration

Answer: ([SHOW ANSWER](#))

Section: Compute

NEW QUESTION: 31

Which data structure results from running this Python code?

```
>>> import json
>>> f = open('fname.json', 'r')
>>> var1 = json.load(f)
>>> var1
{'bd': 'bd1', 'ap': {'eggs': [{'name': 'app'}, {'name': 'web'}, {'name': 'db'}], 'name': 'OnlineStore'}, 'name': '39106329', 'pvn': 'pvn1'}
```

A. Dictionary

B. List

C. Set

D. Tuple


Answer: C ([LEAVE A REPLY](#))

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 32

An engineer must suggest a deployment model for a newly developed application. The engineer has a small starting budget and lacks technical knowledge and infrastructure to implement store, operating system and database services to support the application deployment. The engineer also needs usage data related to the service and the ability to elastically scale the deployment as customer demands grow. Which two models must be used to meet the requirements? (Choose two)

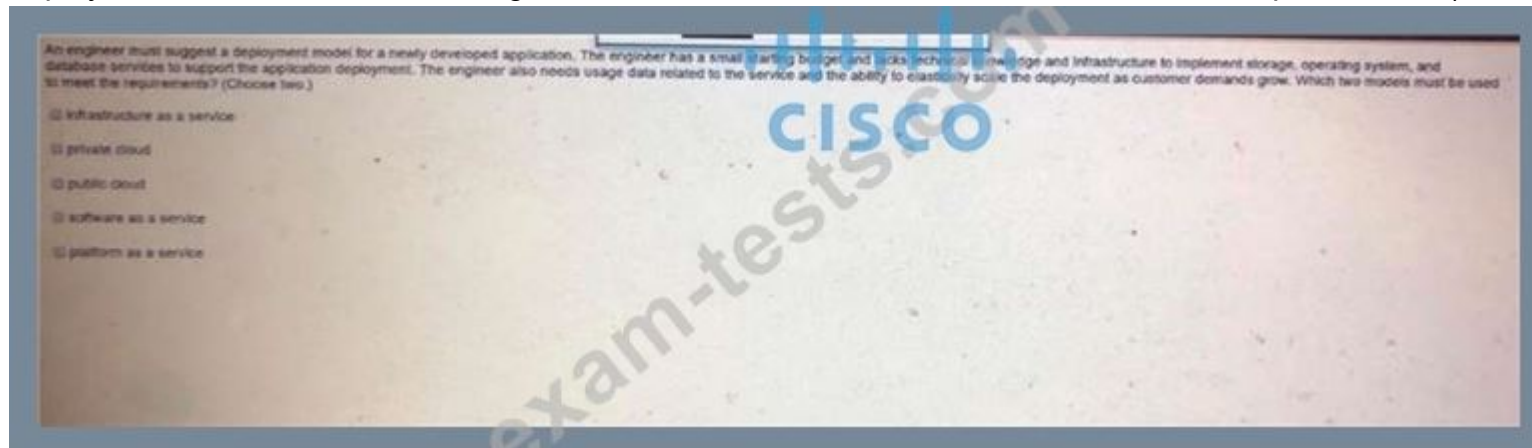

- A. public cloud
- B. platform as a service
- C. private cloud
- D. infrastructure as a service
- E. software as a service

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 33

Refer to the exhibit.

```

NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE

```

What is the result of implementing this configuration?

- A. The TACACS+ server uses the type-6 encrypted format.
- B. The timeout value on the TACACS+ server is 10 seconds.
- C. The switch queries the TACACS+ server by using an encrypted text PAP login.
- D. The switch queries the TACACS+ server by using a clear text PAP login.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 34

Refer to the exhibit.

```

FI-1# scope org /
FI-1 /org # create maint-policy maintenance
FI-1 /org/maint-policy* # set reboot-policy timer-automatic
FI-1 /org/maint-policy* # set soft-shutdown-timer never

```

Which action must be taken before the maintenance policy can be committed?

- A. Associate a service profile to the maintenance policy.
- B. Set the soft shutdown timer to a specific time.
- C. Specify a maintenance time by selecting a schedule.
- D. Set the policy to apply the change on the next reboot.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 35

The Cisco Nexus 5600 Series Switch experiences occasional packet drops on interface ethernet 1/16. An engineer wants to implement a SPAN session to investigate the issue further. The network analyzer to which the packets must be directed is located on interface 1/3. The analyzer is limited on disk space available for traffic capture, so the Nexus switch should send only the relevant data. Which two command sets configure the SPAN session that meets these requirements? (Choose two.)

- ☐ interface ethernet 1/3
switchport monitor
- ☐ monitor session 2
destination interface ethernet 1/3
span interface ethernet 1/16
- ☐ interface ethernet 1/3
switchport span
- ☐ span session 2
type SPAN-on-DROP
destination interface ethernet 1/3
source interface ethernet 1/16
- ☐ monitor session 2 type SPAN-on-DROP
destination interface ethernet 1/3
source interface ethernet 1/16

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: A,E (LEAVE A REPLY)

Explanation

<https://www.cisco.com/c/en/us/products/collateral/switches/nexus-5000-series-switches/white-paper-c11-733022> The information to be sent is regarding dropped packets only.

This configuration creates a SPAN session with type **SPAN-on-DROP**. In the following example, the source interface, where congestion may be present, is port e3/1. The destination port is e3/2, which must be in switchport monitor mode.

```
switch(config)# monitor session <session_number> type SPAN-on-DROP
switch(config-SPAN-on-DROP)# source interface e3/1
switch(config-SPAN-on-DROP)# destination interface e3/2
```

NEW QUESTION: 36

An engineer needs to monitor ingress traffic that arrives at interface Ethernet 1/3 that belongs to a Cisco Nexus

5600 Series Switch. The traffic analyzer machine located at interface Ethernet 1/5 is already monitoring other production, and the traffic analyzer must not be impacted by the traffic captured from the interface Eth1/3. The operations team allocated a traffic budget for the new monitoring session of 1 Gbps to meet this requirement Which set of commands configures the SPAN session?

- interface Ethernet 1/3
switchport monitor rate-limit 1G

monitor session 2
destination interface ethernet 1/5
source interface Eth 1/3
- interface Ethernet 1/3 rx
switchport mode SD
switchport monitor rate-limit 1G
monitor session2
destination interface ethernet 1/5
- interface Ethernet 1/3
monitor rate-limit 1G
destination interface ethernet 1/5
source interface rx

interface Ethernet 1/5
monitor session 2
destination interface tx
- interface Ethernet 1/3
monitor session 2
destination interface ethernet 1/5
source interface rx

interface Ethernet 1/5
monitor rate-limit 1G

A. Option A

B. Option B

C. Option C

D. Option D

Answer: A ([LEAVE A REPLY](#))

Explanation

	switch(config)# interface ethernet slot/port	Enters interface configuration mode for the specified Ethernet interface selected by the slot and port values.
Step 3	switch(config-if)# switchport monitor rate-limit 1G	Specifies that the rate limit is 1 Gbps.
Step 4	switch(config-if)# exit	Reverts to global configuration mode.

Example

This example shows how to limit the bandwidth on Ethernet interface 1/2 to 1 Gbps:

```
switch(config)# interface ethernet 1/2
switch(config-if)# switchport monitor rate-limit 1G
switch(config-if)#
```

Configuring Source Ports

Procedure

	Command or Action	Purpose
Step 1	switch# configure terminal	Enters global configuration mode.
Step 2	switch(config) # monitor session session-number	Enters monitor configuration mode for the specified monitoring session.
Step 3	switch(config-monitor) # source interface type slot/port [rx tx both]	Adds an Ethernet SPAN source port and specifies the traffic direction in which to duplicate packets. You can enter a range of Ethernet, Fibre Channel, or virtual Fibre Channel ports. You can specify the traffic direction to duplicate as ingress (Rx), egress (Tx), or both. By default, the direction is both.

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5600/sw/system_management/7x/b_5600_System_Mgmt_Config_7x/configuring_span.html

NEW QUESTION: 37

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

What be connected to clear the HA NOT READY status?

- A. server chassis
- B. management ports
- C. network uplinks
- D. Layer 1-Layer 2 ports

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 38

An engineer is configuring VNTag between a virtualized server and a Cisco Nexus 5500 Series switch. Drag and drop the configuration steps from the into the correct order on the right.

Configure support for VNTag mode on the interface that connects to the server.	Step 1
Configure the vNICs of the server.	Step 2
Configure the server to support NIV mode.	Step 3
Enable the virtualization feature set.	Step 4
Configure the port profile.	Step 5
Install the virtualization feature set.	Step 6

Answer:

Configure support for VNTag mode on the interface that connects to the server.	Install the virtualization feature set.
Configure the vNICs of the server.	Enable the virtualization feature set.
Configure the server to support NIV mode.	Configure the port profile.
Enable the virtualization feature set.	Configure support for VNTag mode on the interface that connects to the server.
Configure the port profile.	Configure the server to support NIV mode.
Install the virtualization feature set.	Configure the vNICs of the server.

Explanation

install the virtualization feature set

Enable the virtualization feature set

Configure the port profile
Configure support for VNTag mode on the interface that connects to the server.
Configure the server to support NIV mode
Configure the vNICs of the server

NEW QUESTION: 39

A network engineer must prevent data corruption due to cross fabric communication in an FCoE environment. Which configuration must be applied to the Cisco Nexus Unified Switches to achieve this objective?

- A. Switch(config)#fcoe fcmmap 0e,fc,2a
- B. Switch(config-if)# no fcoe fcf-priority 0
- C. Switch(config-if) # shutdown lan
- D. Switch(config) # no fcoe fcf-priority

Answer: A (LEAVE A REPLY)

2. switch(config)# fcoe fcmmap fabric-map

3. (Optional) switch(config)# no fcoe fcmmap fabric-map

DETAILED STEPS

	Command or Action	Purpose
Step 1	switch# configure terminal	Enters configuration mode.
Step 2	switch(config)# fcoe fcmmap fabric-map	Configures the global FC-Map. The default value is 0E.FC.00. The range is from 0E.FC.00 to 0E.FC.FF.
Step 3	switch(config)# no fcoe fcmmap fabric-map	(Optional) Resets the global FC-Map to the default value of 0E.FC.00.

This example shows how to configure the global FC-Map:

switch# configure terminal

switch(config)# fcoe fcmmap 0e.fc.2a

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5000/sw/fcoe/b_Cisco_Nexus_5000_Series_NX-OS_Fibre_Channel_over_Ethernet_Configuration_Guide/Cisco_Nexus_5000_Series_NX-OS_Fibre_Channel_over_Ethernet_Configuration_Guide__chapter3.html

NEW QUESTION: 40

Refer to the exhibit.

```
restart pim
```

Which result of running the command is true?

- A. The PIM database is deleted.

- B. Multicast traffic forwarding is suspended.
- C. PIM join messages are suspended.
- D. MRIB is flushed

Answer: (SHOW ANSWER)

When you restart PIM, the following tasks are performed: The PIM database is deleted. The MRIB and MFIB are unaffected and forwarding of traffic continues. The multicast route ownership is verified through the MRIB. Periodic PIM join and prune messages from neighbors are used to repopulate the database.

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/6-x/multicast/configuration/guide/b_Cisco_Nexus_9000_Series_NX-OS_Multicast_Routing_Configuration_Guide/b_Cisco_Nexus_9000_Series_NX-OS_Multicast_Routing_Configuration_Guide_chapter_011.html

NEW QUESTION: 41

Refer to the exhibit.

```
NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The TACACS+ server uses the type-6 encrypted format.
- B. The switch queries the TACACS+ server by using a clear text PAP login.
- C. The timeout value on the TACACS+ server is 10 seconds.
- D. The switch queries the TACACS+ server by using an encrypted text PAP login.

Answer: D (LEAVE A REPLY)

tacacs-server key

To configure a global TACACS+ shared secret key, use the tacacs-server key command. To remove a configured shared secret, use the no form of this command.

tacacs-server key [0 | 7] shared-secret

Syntax Description

7 (Optional) Configures a preshared key specified in encrypted text to authenticate communication between the TACACS+ client and server.

By default, the Cisco NX-OS device uses Password Authentication Protocol (PAP) authentication between the Cisco NX-OS device and the remote server. If you enable CHAP, you need to configure your RADIUS or TACACS+ server to recognize the CHAP vendor-specific attributes (VSAs).

NEW QUESTION: 42

What is an advantage of NFS as compared to Fibre Channel?

- A. NFS enable thin provisioning for LUNs.
- B. NFS provides the dynamic allocation of storage capacity.
- C. NFS removes the impact of IP overhead.
- D. NFS provides direct access to the underlying storage hardware.

Answer: B (LEAVE A REPLY)

<https://www.ciscolive.com/c/dam/r/ciscolive/apjc/docs/2018/pdf/BRKINI-1011.pdf>

NEW QUESTION: 43

Host 1 is in VLAN 100 located in DataCenter 1 and Host2 is in VLAN200 located in DataCenter2. Which OTV VLAN mapping configuration allows Layer 2 connectivity between these two hosts?

- A. DC1:
- ```
interface Overlay1
 otv extend-vlan 100
 otv vlan mapping 100 to 200
```
- DC2:
- ```
interface Overlay1
  otv extend-vlan 100
  otv vlan mapping 100 to 200
```
- B. DC1:
- ```
interface Overlay1
 otv extend-vlan 100
 otv vlan mapping 100 to 200
```
- DC2:
- ```
interface Overlay1
  otv extend-vlan 200
```

DC1:
interface Overlay1
otv extend-vlan 100

DC2:
interface Overlay2
otv extend-vlan 200

DC1:
interface Overlay1
otv extend-vlan 100

DC2:
interface Overlay1
otv extend-vlan 200

- A. Option B
- B. Option D
- C. Option C
- D. Option A

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 44

Refer to the exhibit.

```
FI-1# scope org /  
FI-1 /org # create maint-policy maintenance  
FI-1 /org/maint-policy* # set reboot-policy timer-automatic  
FI-1 /org/maint-policy* # set soft-shutdown-timer never
```

Which action must be taken before the maintenance policy can be committed?

- A. Specify a maintenance time by selecting a schedule.
- B. Associate a service profile to the maintenance policy.
- C. Set the soft shutdown timer to a specific time.
- D. Set the policy to apply the changes on the next reboot.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 45

An engineer is configuring a backup operation on the existing Cisco UCS environment using a logical configuration. Which configuration is expected to be saved by using this backup type?

- A. systems
- B. roles
- C. service profiles
- D. servers

Answer: C ([LEAVE A REPLY](#))

Explanation

Graphical user interface, text, application, email Description automatically generated

The screenshot shows a document titled "Backup and Export Configuration" from Cisco UCS Manager. It includes a table of contents with links to "Import Operations" and "Restoring the Configuration for a Fabric Interconnect". The main text explains that a backup is a snapshot of the system configuration and can be used to restore the system. It lists four backup types: Full state, All configuration, System configuration, and Logical configuration. Each type is described with its contents and usage. The document also mentions "Considerations and Recommendations for Backup Operations".

- [Import Operations](#)
- [Restoring the Configuration for a Fabric Interconnect](#)

Backup and Export Configuration

When you perform a backup through Cisco UCS Manager, you take a snapshot of all or part of the system configuration and export the file to a location on your network. You cannot use Cisco UCS Manager to back up data on the servers.

You can perform a backup while the system is up and running. The backup operation only saves information from the management plane. It does not have any impact on the server or network traffic.

Backup Types

You can perform one or more of the following types of backups through Cisco UCS Manager.

- **Full state**—A binary file that includes a snapshot of the entire system. You can use the file generated from this backup to restore the system during disaster recovery. This file can restore or rebuild the configuration on the original fabric interconnect, or recreate the configuration on a different fabric interconnect. You cannot use this file for an import.
- **All configuration**—An XML file that includes all system and logical configuration settings. You can use the file generated from this backup to import these configuration settings to the original fabric interconnect or to a different fabric interconnect. You cannot use this file for a system restore.
- **System configuration**—An XML file that includes all system configuration settings such as usernames, roles, and locales. You can use the file generated from this backup to import these configuration settings to the original fabric interconnect or to a different fabric interconnect. You cannot use this file for a system restore.
- **Logical configuration**—An XML file that includes all logical configuration settings such as service profiles, VLANs, VSANs, pools, and policies. You can use the file generated from this backup to import these configuration settings to the original fabric interconnect or to a different fabric interconnect. You cannot use this file for a system restore.

Considerations and Recommendations for Backup Operations

https://www.cisco.com/en/US/docs/unified_computing/ucs/sw/gui/config/guide/141/UCSM_GUI_Configuration_Guide_141_chapter43.html

NEW QUESTION: 46

The screenshot shows a Cisco IOS configuration window with the following commands:

```
switch (config) # feature dhcp
switch (config) # ip dhcp snooping
switch (config) # service dhcp
switch (config) # ip dhcp snooping vlan 100,200,250-252
switch (config) # ip dhcp relay information option
```

Refer to the exhibit. Which action is taken to ensure that the relay agent forwards the DHCP BOOTREQUEST packet to a DHCP server?

- A. Configure the IP address of the DHCP server.
- B. Verify the DHCP snooping bindings.
- C. Configure the interface of the DHCP server as untrusted.
- D. Enable the DHCP relay agent.

Answer: B ([LEAVE A REPLY](#))

Section: Security

Explanation/Reference:

Reference:

https://www.cisco.com/en/US/docs/ios/12_4t/ip_addr/configuration/guide/htdhcpre.html

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 47

An engineer must ensure fabric redundancy when implementing NPV mode on a Cisco MDS 9000 Series Switch.

Which action enables fabric redundancy?

- A. Use TE ports to connect to upstream switches.
- B. Add a port channel to upstream switches.
- C. Configure the NPV devices to use an external FLOGI database.
- D. Connect the NPV devices to multiple upstream switches.

Answer: B (LEAVE A REPLY)

Section: Storage Network

Explanation/Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/5_0/configuration/guides/int/nxos/cli_interfaces/pc.html

NEW QUESTION: 48

Which two statements about the process of performing an EPLD upgrade on a Cisco MDS 9000 series Switch are true? (Choose two.)

- A. If an upgrade is interrupted, the upgrade continues after a connection is restored.
- B. The upgrade can be performed from the standby supervisor module.
- C. The active supervisor can be upgraded.
- D. Modules must be online to be upgraded.
- E. The Upgrade process disrupts only the module that is being upgraded.

Answer: D,E (LEAVE A REPLY)

Explanation

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/8_x/release_notes/epld/epld_rn_8x.htm

Guidelines and Limitations

When you upgrade or downgrade the EPLDs, observe the following guidelines and limitations:

- You can upgrade each module only when it is online. The EPLD upgrade is only disruptive to the module being upgraded.
- If you interrupt an EPLD upgrade or downgrade, the module must be upgraded again.
- In Cisco MDS 9000 Director Switches, EPLD upgrade or downgrade can only be executed from the active supervisor module. To upgrade the supervisor EPLDs nondisruptively, upgrade the standby supervisor and then switchover. After the new standby supervisor is online its EPLDs can be upgraded.
- In Cisco MDS 9000 Series Fabric Switches, be sure to specify 1 as the module number. The switch must be power cycled for the EPLDs to start running the new code.

NEW QUESTION: 49

Which two actions should be taken before an upgrade is started on a Cisco MDS switch? (Choose two.)

- A. disable Cisco Fabric Services
- B. check the impact of the upgrade using the show install all impact command
- C. free up space on the USB3 device by deleting old Cisco NX-OS image files

D. make the primary supervisor the active supervisor

E. back up the configuration

Answer: B,E (LEAVE A REPLY)

Section: Storage Network

Explanation/Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/mds9000/sw/5_2/upgrade/guides/nx-os/upgrade.html

NEW QUESTION: 50

Refer to the exhibit.



```
NEXUS(config)# radius-server timeout 15
NEXUS(config)# ip radius source-interface Vlan100
NEXUS(config)# radius-server host 10.1.50.31 key 2 "cisco1234"
authentication accounting
NEXUS(config)# aaa group server radius RADIUS
NEXUS(config-radius)# server 10.1.50.31
NEXUS(config-radius)# deadtime 10
NEXUS(config-radius)# use-vrf management
NEXUS(config-radius)# source-interface mgmt 0
NEXUS(config)# aaa authentication login default group RADIUS
```

What is the result of implementing the configuration?

A. Only the RADIUS server is used for authentication.

B. RADIUS traffic is sourced from the VLAN 200 interface.

C. The RADIUS server timeout value is 15 milliseconds.

D. Users specify the RADIUS server when they log in.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 51

Refer to the exhibit.

Python Code:

```
import requests
import json

url='http://lab-93180bdlf-sw1/ins'
switchuser='dazfre'
switchpassword='Clscorox0'

myheaders={'content-type' : 'application/json'}
payload={
    "ins_api": {
        "version": "1.0",
        "type": "cli_show",
        "chunk": "0",
        "sid": "1",
        "input": "configure terminal : feature hsrp",
        "output_format": "json"
    }
}
response = requests.post(url,data=json.dumps(payload),
headers=myheaders,auth=(switchuser,switchpassword))
print(response.text)
ERROR MESSAGE
{
  "ins_api" : [
    {
      "type": "cli_show",
      "version": "1.0",
      "sid": "eoc",
      "outputs": [
        {
          "output": [
            {
              "clierror": "% invalid command\n",
              "input": "configure terminal",
              "msg": "input CLI command error",
              "code": "400"
            },
            {
              "clierror": "% invalid command\n",
              "input": "feature hsrp",
              "msg": "input CLI command error",
              "code": "400"
            }
          ]
        }
      ]
    }
  ]
}
```

Why does the python code for Cisco NX-API print error message?

- A. NX-API does not allow configuration for features via the requests module.
- B. The JSON is not a supported format for the NX-API.
- C. The "type" is wrong in the body of the request and should be "cli_conf".
- D. The "type" is wrong in the header of the request and should be "cli_conf".

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 52

The FCoE technology is used in a data center and the MDS switches are configured as Fibre Channel Forwarders. What configuration should be applied to an MDS switch in order to be used as the best switch to connect by the CNAs in the fabric?

- A. fcoe fcf-priority 1024
- B. fcoe fcf-priority 512
- C. fcoe fcf-priority 0
- D. no fcoe fcf-priority

Answer: C ([LEAVE A REPLY](#))

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5000/sw/fcoe/521n11/b_5k_FCoE_Config_521N11/b_5k_FCoE_Config_521N11_chapter_011.pdf

NEW QUESTION: 53

When the default firmware package is set to a new version, which type of policy determines the timing of server reboots during the firmware upgrade?

- A. diagnostics
- B. maintenance
- C. local disk
- D. BIOS

Answer: ([SHOW ANSWER](#)**)**

Explanation

NEW QUESTION: 54

APIC EPG Resolution Immediacy is set to "Immediate" Which statement is true about the Deployment Immediacy for VMM domains associated to EPGs?

- A. The "Immediate" and "On demand" options require a port group to be created on the VDS.
- B. If "On demand" is selected, the policy is programmed in the hardware only when the APIC detects a VM created in the EPG.
- C. If "On demand" is selected the policy is programmed in the hardware only when the first packet is received through the data path.
- D. If "immediate" is selected the policy is programmed in the hardware as soon as the leaf is booted.

Answer: C ([LEAVE A REPLY](#))

Explanation

"Deployment Immediacy On demand - Specifies that the policy is programmed in the hardware policy CAM only when the first packet is received through the data path."

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamenta

NEW QUESTION: 55

AN engineer enters these commands while in EEM on a Cisco Nexus 9000 Series Switch.

event manager applet Backup-config

event timer watchdog time 1800 name timer

event cli match "copy running-config startup-config"

what is the result of applying this configuration?

- A. It saves the running configuration every 1800 seconds.
- B. It generates an error because no action is mentioned.
- C. It executes the copy running-config startup-config command.

D. It blocks the copy running-config startup-config command.

Answer: B (LEAVE A REPLY)

Explanation

<https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/93x/system-management/b-cisco-nexu>

Prerequisites for EEM

EEM has the following prerequisites:

- You must have network-admin user privileges to configure EEM.

Guidelines and Limitations for EEM

EEM has the following configuration guidelines and limitations:

- The maximum number of configurable EEM policies is 500.
- Action statements within your user policy or overriding policy should not negate each other or adversely affect the associated system policy.
- To allow a triggered event to process any default actions, you must configure the EEM policy to allow the default action. For example, if you match a CLI command in a match statement, you must add the event-default action statement to the EEM policy or EEM will not allow the CLI command to execute.
- When you configure an EEM policy action to collect **show tech** commands, make sure to allocate enough time for the **show tech** commands to complete before the same action is called again.

NEW QUESTION: 56

Which two statements describe modifying Cisco UCS user accounts? (Choose two.)

- A. Disabling a user account maintains all of the data in the Cisco UCS Fabric Interconnect.
- B. The admin account is used only to log on by using SSH.
- C. The password of the user account must contain a minimum of 10 characters.
- D. Local user accounts override the same account on a remote authentication server, such as TACACS, RADIUS, or LDAP.
- E. The password of the user account expires in 30 days.

Answer: A,D (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Admin-Management/3-1/b_Cisco_UCS_Admin_Mgmt_Guide_3_1/b_UCSM_Admin_Mgmt_Guide_chapter_01.html

NEW QUESTION: 57

A network engineer must create an EEM script that saves a copy of the running configuration on bootflash and writes a message to syslog when a user saves the configuration to a Cisco Nexus switch. Which configuration set should be applied to complete this task?

```

event manager applet local- backup
  event cli match "copy running-config startup-config"
  action 1 cli copy running-config bootflash:/current_config.txt
  action 2 syslog msg Configuration saved and copied to bootflash

event manager applet local- backup
  event cli match "write memory"
  action 1 cli copy running-config bootflash:/current_config.txt
  action 2 snmp-trap strdata "Configuration saved and copied to bootflash"

event manager applet local- backup
  event cli match "copy running-config startup-config"
  action 1 cli copy running-config bootflash:/current_config.txt
  action 2 syslog msg Configuration saved and copied to bootflash
  action 3 event-default

event manager applet local- backup
  event cli match "write memory"
  action 1 cli copy running-config bootflash:/current_config.txt
  action 2 syslog msg Configuration saved and copied to bootflash
  action 3 event-default

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: C ([LEAVE A REPLY](#))

Explanation

The command write memory is not valid in NX-OS

The "event-default"

If you want to allow the triggered event to process any default actions, you must configure the EEM policy to allow the default action. For example, if you match a CLI command in a match statement, you must add the event-default action statement to the EEM policy or EEM will not allow the CLI command to execute.

NEW QUESTION: 58

Which product includes prebuilt templates that can be used to customize fabric deployments?

- A. Cisco ACI
- B. Cisco UCS Manger
- C. Cisco data Center Network Manger
- D. Cisco Tetration

Answer: C ([LEAVE A REPLY](#))

Explanation

<https://www.cisco.com/c/en/us/products/collateral/cloud-systems-management/prime-data-center-networkmanag>


https://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/11_2_1/config_guide/lanfabric/ b_dcnm_fabric_lan/template_usage.html

NEW QUESTION: 59

A network engineer must configure FCoE on an interface of a cisco MDS 9000 series switch. It should be used for mapping between Vlan 600 and Vsan 6. Drag and drop the commands from the bottom into their implementation order in the FCoE configuration. Not all commands are used.



Answer:

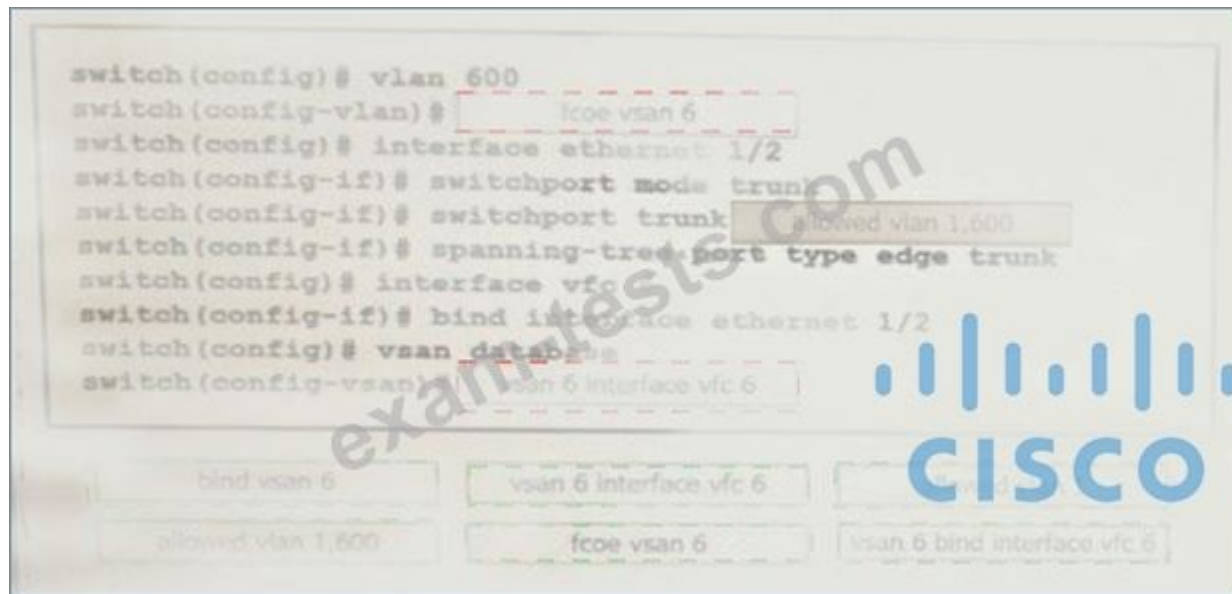

Explanation

fcoe vsan 6

allowed vlan 1,600

vsan 6 interface vfc 6

NEW QUESTION: 60

Port security is statically configured on a Cisco Nexus 7700 Series switch and F3 line card. The switch is configured with an Advanced Services license. Which two actions delete secured MAC addresses from the interface? (Choose Two)

- A. The address must be removed from the configuration.
- B. The address must reach the age limit that is configured for the interface.
- C. The interface must be converted to a routed port.
- D. The device must be restarted manually.

E. Shutdown and then no shutdown must be run on the interface.

Answer: (SHOW ANSWER)

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/6_x/nx-os/security/configuration/guide/b_Cisco_Nexus_7000_NX-OS_Security_Configuration_Guide__Release_6-x/b_Cisco_Nexus_7000_NX-OS_Security_Configuration_Guide__Release_6-x_chapter_010001.html

Static Method

The static learning method allows you to manually add or remove secure MAC addresses to the running configuration of an interface. If you copy the running configuration to the startup configuration, static secure MAC addresses are unaffected if the device restarts.

A static secure MAC address entry remains in the configuration of an interface until one of the following events occurs:

- You explicitly remove the address from the configuration.
- You configure the interface to act as a Layer 3 interface.

Adding secure addresses by the static method is not affected by whether dynamic or sticky address learning is enabled.

NEW QUESTION: 61

An engineer performs a set of configuration changes for the vPC domain using Session Manager. Which two commands are used to verify the configuration and apply the device changes when no errors are returned? (Choose two)

- A. write
- B. verify
- C. commit
- D. checkpoint
- E. apply

Answer: (SHOW ANSWER)

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/6-x/system_management/configuration/guide/b_Cisco_Nexus_9000_Series_NX-OS_System_Management_Configuration_Guide/sm_7sessionmgr.html

Verifying a Session

Use the following command in session mode to verify a session:

Command	Purpose
verify [verbose] Example: switch(config-s)# verify	Verifies the configuration as a whole, based on the existing hardware and software configuration and resources. Cisco NX-OS returns an error if the configuration does not pass this verification.

Committing a Session

Use the following command in session mode to commit a session:

Command	Purpose
commit [verbose] Example: switch(config-s)# commit	Validates the configuration changes made in the current session and applies valid changes to the device. If the validation fails, Cisco NX-OS reverts to the original configuration.

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5000/sw/configuration/guide/cli/CLIConfigurationGuide/sm_rollback.html

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 62

Refer to the exhibit.

```
N5K-1(config)#interface fc2/3
N5K-1(config-if)#switchport mode sd
N5K-1(config-if)# no shutdown
```

What is the result of implementing this configuration?

- A. The Fibre Channel interface is configured for SPAN.
- B. The Fibre Channel interface is configured for source distribution.
- C. The Fibre Channel interlace is configured for FSPF.
- D. The Fibre Channel interface is configured for synchronization distribution.

Answer: A ([LEAVE A REPLY](#))



Section: Storage Network

NEW QUESTION: 63


An engineer is implementing security on the Cisco MDS 9000 switch. Drag drop the descriptions from the left onto the correct security features on the right.

can be distributed via fabric services	Fabric Binding Target 1 Target 2
uses the Exchange Fabric Membership Data protocol	
allows a preconfigured set of Fibre Channel devices to logically connect to SAN ports	Port Security Target 3 Target 4
prevent unauthorized switches from joining the fabric or disrupting current fabric operations	

Answer:

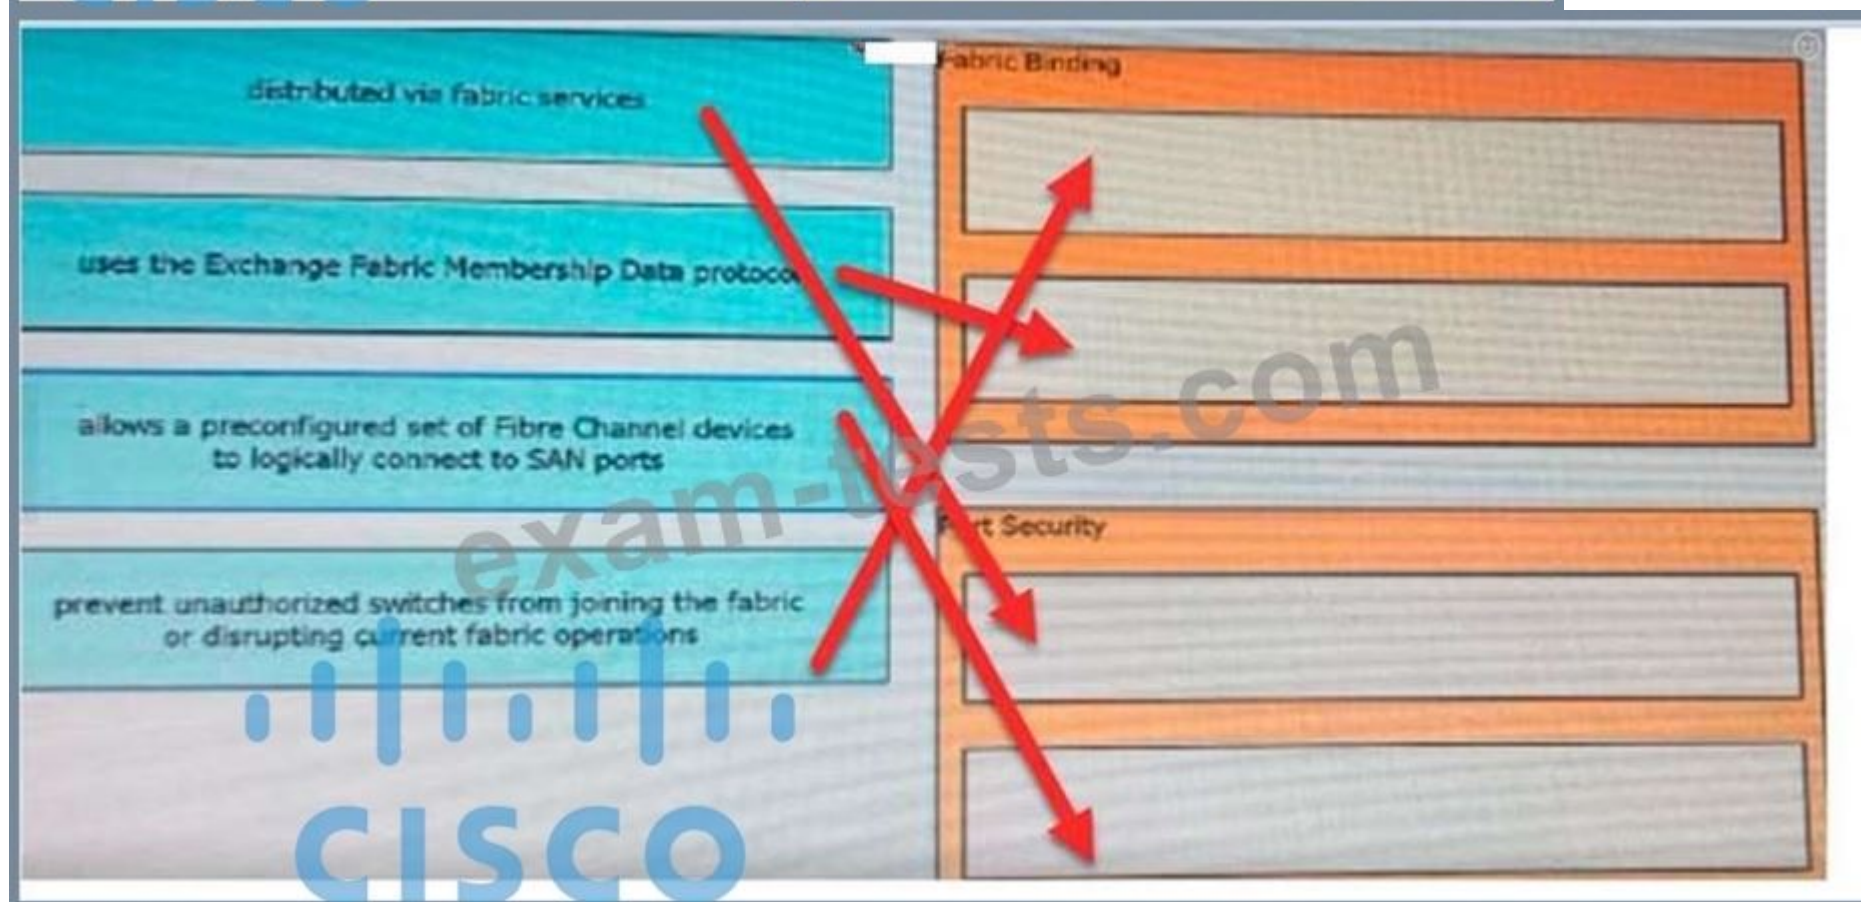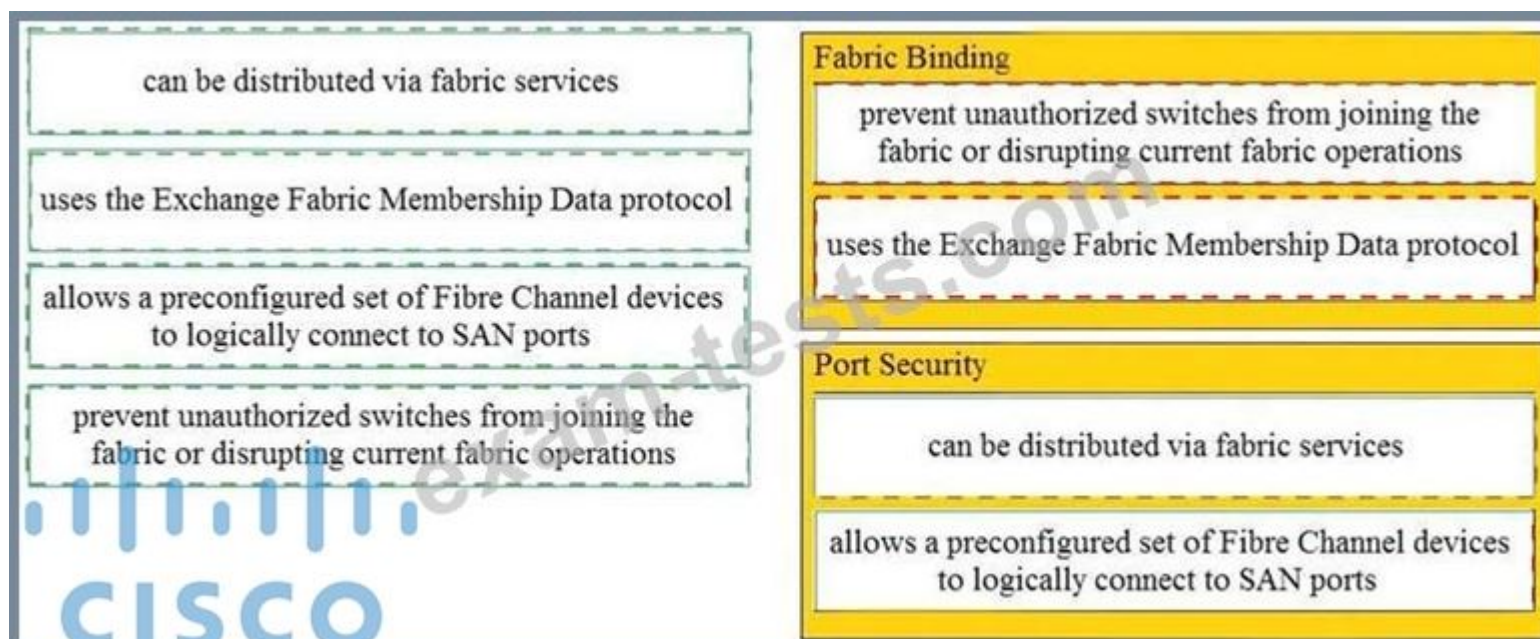

NEW QUESTION: 64

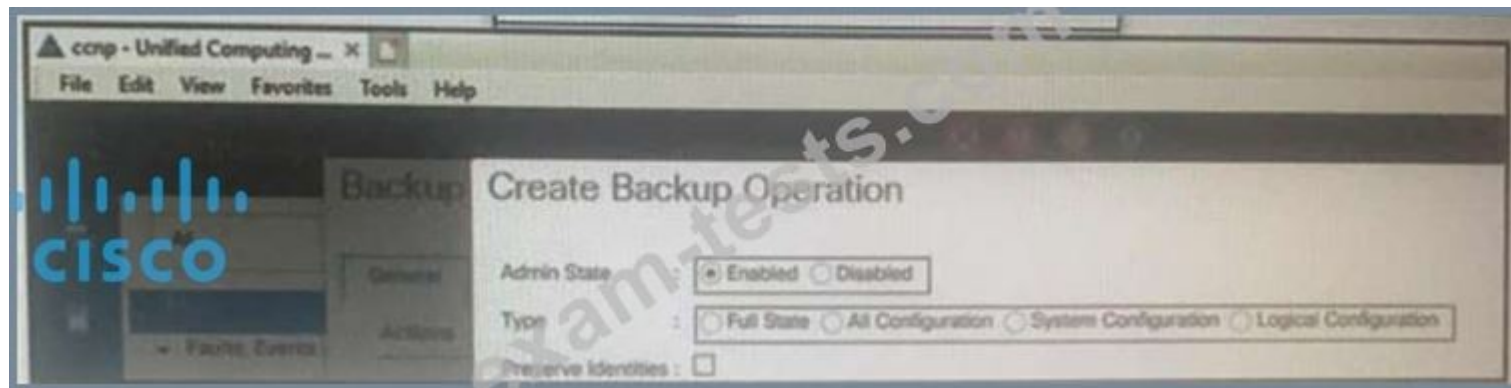

Refer to the exhibit. Which backup operation type not include the preserve identities feature?

- A. System configuration
- B. All configuration
- C. Full state
- D. Logical configuration

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 65

An engineer needs to implement a solution that prevents loops from occurring accidentally by connecting a switch to interface Ethernet1/1. The port is designated to be used for host connectivity. What configuration should be implemented?

- ☐ switch# configure terminal
switch(config)# interface Ethernet1/1
switch(config-if)# spanning-tree guard loop
- ☐ switch# configure terminal
switch(config)# interface Ethernet1/1
switch(config-if)# spanning-tree bpduguard enable
- ☐ switch# configure terminal
switch(config)# interface Ethernet1/1
switch(config-if)# spanning-tree bpduguard enable
- ☐ switch# configure terminal
switch(config)# interface Ethernet1/1
switch(config-if)# spanning-tree loopguard default

- A. Option B
- B. Option A
- C. Option D
- D. Option C

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 66

Refer to the exhibit.

```
N5K-1(config)#interface fc2/3
N5K-1(config-if)#switchport mode sd
N5K-1(config-if)# no shutdown
```

What is the result of implementing this configuration?

- A. The Fibre Channel interface is configured for SPAN.

- B.** The Fibre Channel interface is configured for synchronization distribution.
- C.** The Fibre Channel interface is configured for FSPF.
- D.** The Fibre Channel interface is configuration for source distribution.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 67

An engineer must implement a Cisco UCS system at a customer site. One of the requirements is to implement SAN boot. The storage system maps the source WWPN to a unique LUN.

Which method does Cisco recommend to configure the SAN boot?

- A.** Define the vHBAs as bootable and leave the boot target definition empty.
- B.** Define the vHBAs as bootable and leave the default values on the boot target definition.
- C.** Create a SAN boot policy in which every initiator is mapped to a different target LUN.
- D.** Create a SAN boot policy in which every initiator is mapped to the same target LUN.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 68

Refer to the exhibit.

```

N7K-1
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.2/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    preempt
    priority 150
    ip 10.16.165.1

vpc domain 100
  role priority 100
  peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize

N7K-2
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.3/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    priority 50
    ip 10.16.165.1

vpc domain 100
  role priority 200
  peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize

```

Which statement about the default gateway configuration of the vPC is true?

- A. N7K-1 acts as the default gateway for all traffic.
- B. Either switch can act as the active default gateway.

C. N7K-2 forwards traffic that is destined for the default gateway by using the peer link.

D. N7K-2 acts as the default gateway for all traffic.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 69

Refer to the exhibit.

```
Enter the configuration method. (console/gui) ? console

Enter the setup mode; setup newly or restore from backup.
(setup/restore) ? restore

NOTE:
  To configure Fabric interconnect using a backup file on
a remote server, you will need to setup management
interface.
  The management interface will be re-configured (if
necessary), based on information stored in the backup file.

Continue to restore this Fabric interconnect from a backup
file (yes/no) ? yes

Physical Switch Mgmt0 IPv4 address : 192.168.10.10
Physical Switch Mgmt0 IPv4 netmask : 255.255.255.0
IPv4 address of the default gateway : 192.168.10.1
Enter the protocol to get backup file (scp/ftp/tftp/sftp)
? scp
Enter the IP address of backup server: 20.10.20.10
Enter fully qualified backup file name: Backup.bak
Enter user ID: user
Enter password:
  Retrieved backup configuration file.
Configuration file - Ok
```

Which type of backup is required to restore a Cisco UCS configuration?

A. system configuration

B. all configuration

C. logical configuration

D. full state

Answer: A ([LEAVE A REPLY](#))

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/cli/config/guide/1-0-2/b_CLI_Config_Guide_1-0-2/CLI_Config_Guide_1-0-2_chapter29.pdf

The following example restores a system configuration from the Backup.bak file, which was retrieved from the 20.10.20.10 backup server using FTP:

```
Enter the configuration method. (console/gui) ? console

Enter the setup mode; setup newly or restore from backup. (setup/restore) ? restore

NOTE:
  To configure Fabric interconnect using a backup file on a remote server,
  you will need to setup management interface.
  The management interface will be re-configured (if necessary),
  based on information stored in the backup file.

Continue to restore this Fabric interconnect from a backup file (yes/no) ? yes

Physical Switch Mgmt0 IPv4 address : 192.168.10.10

Physical Switch Mgmt0 IPv4 netmask : 255.255.255.0

IPv4 address of the default gateway : 192.168.10.1

Enter the protocol to get backup file (scp/ftp/tftp/sftp) ? scp
Enter the IP address of backup server: 20.10.20.10
Enter fully qualified backup file name: Backup.bak
Enter user ID: user
Enter password:
  Retrieved backup configuration file.
Configuration file - Ok
```

```
Cisco UCS 6100 Series Fabric Interconnect
UCS-A login:
```

NEW QUESTION: 70

An engineer must configure a Nexus 7000 series switch for HSRP on VLAN 100. When fully functional, the router must be the active master. Which set of commands must be used to implement the scenario?

● feature hsrp
interface vlan100
ip address 10.1.1.2 255.255.255.0
priority 120
hsrp version 2
hsrp 1000
ip 10.1.1.1

● feature hsrp
interface vlan100
ip address 10.1.1.2 255.255.255.0
priority 100
hsrp version 2
hsrp 1000
ip 10.1.1.1

● feature-set hsrp
interface vlan100
ip address 10.1.1.2 255.255.255.0
priority 110
hsrp version 2
hsrp 1000
ip 10.1.1.1

● feature-set hsrp
interface vlan100
ip address 10.1.1.2 255.255.255.0
priority 80
hsrp version 2
hsrp 1000
ip 10.1.1.1



A. Option C

B. Option B

C. Option A

D. Option D

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 71

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

What be connected to clear the HA NOT READY status?

- A. network uplinks
- B. server chassis
- C. Layer 1-Layer 2 ports
- D. management ports

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 72

Refer to the exhibit.

```
CISCO-UCS-A# scope org /
CISCO-UCS-A /org # create service-profile Cisc01 instance
CISCO-UCS-A /org/service-profile* # set bios-policy bios1
CISCO-UCS-A /org/service-profile* # set boot-policy boot1
CISCO-UCS-A /org/service-profile* # set ext-mgmt-ip-state none
CISCO-UCS-A /org/service-profile* # set host-fw-policy ipmi-user987
CISCO-UCS-A /org/service-profile* # set identity dynamic-uuid derived
CISCO-UCS-A /org/service-profile* # set ipmi-access-profile ipmil
CISCO-UCS-A /org/service-profile* # set local-disk-policy local1
CISCO-UCS-A /org/service-profile* # set maint-policy maint1
CISCO-UCS-A /org/service-profile* # set mgmt-fw-policy mgmt1
CISCO-UCS-A /org/service-profile* # set power-control-policy power1
CISCO-UCS-A /org/service-profile* # set scrub-policy scrub1
CISCO-UCS-A /org/service-profile* # set sol-policy sol1
CISCO-UCS-A /org/service-profile* # set stats-policy stats1
CISCO-UCS-A /org/service-profile* # set user-label Cisco
CISCO-UCS-A /org/service-profile* # vcon-policy vconnpolicy
CISCO-UCS-A /org/service-profile* # commit-buffer
CISCO-UCS-A /org/service-profile #
```

What is a characteristic of the UUID in the service profile presented.

- A. vendor assigned
- B. allocated from a UUID pool
- C. based on the hardware

D. unique system generated

Answer: (SHOW ANSWER)

NEW QUESTION: 73

An engineer must start a software upgrade on a Cisco Nexus 5000 Series Switch during a zone merge. What is the result of this action?

A. The zone merge stops.

B. The zone merge pauses until the upgrade completes

C. The upgrade stops

D. The zone merge executes and then the upgrade completes.

Answer: C (LEAVE A REPLY)

Explanation

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus5500/sw/upgrade/602_N2_2/n5500_upgrade_d

The specific requirements for a nondisruptive upgrade (ISSU) are as follows:

- Topology requirements— A Cisco Nexus device on which an ISSU is being initiated should not be in one of the unsupported topologies listed in the previous figure. No interface should be in a spanning-tree designated forwarding state. Also, do not configure Bridge Assurance on any interface of the Cisco Nexus device. VPC peer-link is an exception to these requirements.
- Layer 2 requirement— The ISSU process aborts if the system has any Link Aggregation Control Protocol (LACP) fast timers configured.
- FC/FCoE requirements—Check that the topology is stable for an ISSU to work correctly. You must check the following:
 - Domain Manager—As part of the installation process, domain manager checks if the fabric is in a stable state. If the fabric is not stable, the installation aborts.
 - CFS—As part of the installation process, Cisco Fabric Services (CFS) checks if any application (ntp, fsm, rcsn, fctime) is locked. If any application is holding a CFS lock, the installation aborts.
 - Zone Server— The installation process aborts if a zone merge or zone change request is in progress.
 - FSPF—As part of the upgrade process, Fabric Shortest Path First (FSPF) verifies if the configured interface dead interval is more than 80 seconds; otherwise, the installation aborts.

NEW QUESTION: 74

Refer to the exhibit.

```
UCS-A# scope adapter 1/1/1
```

```
UCS-A# /chassis/server/adapter # show image
```

Name	Type	Version	State
ucs-m81kr-vic.2.2.1b.bin	Adapter	2.2(1b)	Active

```
UCS-A# /chassis/server/adapter # update firmware 2.2(1b)
```

```
UCS-A# /chassis/server/adapter* # activate firmware 2.2(1b)
```

```
set-startup-only
```

```
UCS-A# /chassis/server/adapter* # commit-buffer
```

```
UCS-A# /chassis/server/adapter #
```

What is the result of this series of commands?

A. It reboots the server immediately.

B. It verifies the firmware update on the server.

C. It activates the firmware on the next adapter boot.

D. It updates the firmware on adapter 1/1/1 immediately.

Answer: C (LEAVE A REPLY)

Explanation

Step 6	UCS-A /chassis/server/adapter # activate firmware version-num [set- startup-only]	Activates the selected firmware version on the adapter. Use the set-startup-only keyword if you want to move the activated firmware into the pending-next-boot state and not immediately reboot the server. The activated firmware does not become the running version of firmware on the adapter until the server is rebooted. You cannot use the set-startup-only keyword for an adapter in the host firmware package.
--------	--	---

NEW QUESTION: 75

An engineer performs a set of configuration changes for the vPC domain using Session Manager. Which two commands are used to verify the configuration and apply the device changes when no errors are returned? (Choose two)

- A. write
- B. verify
- C. commit
- D. checkpoint
- E. apply

Answer: B,C (LEAVE A REPLY)

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/6-x/system_management/configuration/guide/b_Cisco_Nexus_9000_Series_NX-OS_System_Management_Configuration_Guide/sm_7sessionmgr.html
verifying a session

Use the following command in session mode to verify a session:

Command	Purpose
verify [verbose] Example: switch(config-s)# verify	Verifies the configuration as a whole, based on the existing hardware and software configuration and resources. Cisco NX-OS returns an error if the configuration does not pass this verification.

Committing a Session

Use the following command in session mode to commit a session:

Command	Purpose
commit [verbose] Example: switch(config-s)# commit	Validates the configuration changes made in the current session and applies valid changes to the device. If the validation fails, Cisco NX-OS reverts to the original configuration.

NEW QUESTION: 76

An engineer installed a new Nexus switch with the mgm0interface in vrf management. Connectivity to the rest of the network needs to be tested from the guest shell of the NX-OS. Which command tests connectivity from the shell of the NX-OS?

```
[guestshell@guestshell ~]$ ping 173.37.145.84 vrf management
[guestshell@guestshell ~]$ chvrf management ping 173.37.145.84
[guestshell@guestshell ~]$ iping vrf management ip 173.37.145.84
[guestshell@guestshell ~]$ dohost "ping vrf management 173.37.145.84"
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B ([LEAVE A REPLY](#))

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/7-x/programmability/guide/b_Cisco_Nexus_9000_Series_NX-OS_Programmability_Guide_7x/Guest_Shell.html

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 77

A UCS B-Series server located in B5108 chassis 1 slot 1 is currently unavailable. The server needs to be associated with a specific service profile when it becomes available. Which associate service profile option should be selected to accomplish this goal?

- A. restrict migration
- B. server pool
- C. server
- D. custom server

Answer: C ([LEAVE A REPLY](#))

Section: Compute

NEW QUESTION: 78

An engineer created a service profile in Cisco UCS Manager and associated it to a server. The engineer must create a policy if there is a disruptive change applied to the service profile Which policy type must be used to accomplish this goal?

- A. administration
- B. BIOS
- C. maintenance
- D. reboot

Answer: (SHOW ANSWER)

Explanation

<https://community.cisco.com/t5/data-center-documents/understanding-and-configuring-cisco-ucs-maintenance-p>

Introduction

A maintenance policy determines a pre-defined action to take when there is a disruptive change made to the service profile associated with a server. The maintenance policy specifies how Cisco UCS Manager deploys the service profile changes. When creating a maintenance policy you have to select a reboot policy which defines when the server can reboot once the changes are applied. The Immediate option will make the server to reboot right then. User acknowledge option will wait for manual acknowledgement from user before rebooting the server. Timer automatic option will trigger the reboot at a specific time mentioned in a schedule.

NEW QUESTION: 79

Which action must be performed before renumbering a Cisco UCS chassis?

- A. Move the chassis to new ports on fabric interconnect.
- B. Decommission the chassis.
- C. Run the shut and no shut command on the connected ports.
- D. Re-acknowledge the chassis.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 80

Refer to the exhibit.

```
NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The TACACS+ server uses the type-6 encrypted format.
- B. The switch queries the TACACS+ server by using a clear text PAP login.
- C. The timeout value on the TACACS+ server is 10 seconds.
- D. The switch queries the TACACS+ server by using an encrypted text PAP login.

Answer: D (LEAVE A REPLY)

Explanation

tacacs-server key

To configure a global TACACS+ shared secret key, use the tacacs-server key command. To remove a configured shared secret, use the no form of this command.

tacacs-server key [0 | 7] shared-secret

Syntax Description

7 (Optional) Configures a preshared key specified in encrypted text to authenticate communication between the TACACS+ client and server.

By default, the Cisco NX-OS device uses Password Authentication Protocol (PAP) authentication between the Cisco NX-OS device and the remote server. If you enable CHAP, you need to configure your RADIUS or TACACS+ server to recognize the CHAP vendor-specific attributes (VSAs).

NEW QUESTION: 81

Refer to the exhibit.

```
Nexus# show vpc peer-keepalive | i Keepalive
--Keepalive interval : 1000 msec
--Keepalive timeout : 5 seconds
--Keepalive hold timeout : 3 seconds
--Keepalive vrf : management
--Keepalive udp port : 3200
--Keepalive tos : 192

Nexus# ethanalyzer local interface mgmt limit-captured-frames 1000

Capturing on mgmt0
2019-06-15 12:01:51.242597 192.168.254.11 -> 192.168.254.3 ICMP Echo (ping) request
2019-06-15 12:01:51.242860 192.168.254.3 -> 192.168.254.11 ICMP Echo (ping) reply
2019-06-15 11:50:15.975474 192.168.254.1 -> 192.168.254.3 TCP 47540 -> bootps [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.975547 192.168.254.3 -> 192.168.254.1 TCP 29 -> 47540 [RST, A CK] Seq=1 Ack=1 Win=0 Len=0
2019-06-15 11:50:15.975564 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 44 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.975924 192.168.254.1 -> 192.168.254.3 TCP 47540 -> discard [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.976027 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 97 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.976381 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 35 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:16.661845 192.168.254.3 -> 192.168.254.4 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:16.761147 00:8e:73:a2:41:13 -> 01:80:c2:00:00:00 STP Conf. Root = 8192/10/ec:e1:a9:df:6c:80 Cost = 22 Port = 0x8013
2019-06-15 11:50:16.853248 192.168.254.4 -> 192.168.254.3 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.326253 192.168.254.1 -> 192.168.254.3 SSH Encrypted request packet len=52
2019-06-15 11:50:17.327313 192.168.254.3 -> 192.168.254.1 SSH Encrypted response packet len=1348
2019-06-15 11:50:17.377246 192.168.254.4 -> 239.255.70.83 UDP Source port: 7546 Destination port: 7546
2019-06-15 11:50:17.552215 192.168.254.1 -> 192.168.254.3 TCP 14139 -> ssh [ACK] Seq=365 Ack=11277 Win=63546 Len=0
2019-06-15 11:50:17.661764 192.168.254.3 -> 192.168.254.4 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.653242 192.168.254.4 -> 192.168.254.3 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.872637 8c:60:4f:aa:c2:e1 -> 01:80:e7:00:00:0e LLDP Chassis : d = 8c:60:41:aa:c2:e1 Port Id = mgmt0 TTL = 120
2019-06-15 11:50:08.173056 192.168.256.3 -> 192.168.254.2 NTP NTP client
2019-06-15 11:50:08.173256 192.168.256.2 -> 192.168.254.3 NTP NTP server
```

A flapping link issue has been reported on the vPC keepalive link. A packet capture has been activated on the Cisco Nexus switch. What is the destination IP address of the vPC keepalive packets that are sent by the switch?

A. 239.255.70.83

B. 192.168.254.2

C. 192.168.254.1

D. 192.168.254.4

Answer: D (LEAVE A REPLY)

NEW QUESTION: 82

Refer to the exhibit.

```
FI-1# scope org /  
FI-1 /org # create maint-policy maintenance  
FI-1 /org/maint-policy* # set reboot-policy timer-automatic  
FI-1 /org/maint-policy* # set soft-shutdown-timer never
```

Which action must be taken before the maintenance policy can be committed?

- A. Associate a service profile to the maintenance policy.
- B. Specify a maintenance time by selecting a schedule.
- C. Set the policy to apply the change on the next reboot.
- D. Set the soft shutdown timer to a specific time.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 83

Refer to the exhibit.

```
monitor fabric session mySession  
  description "This is my fabric ERSPAN session"  
  destination tenant t1 application appl epg epg1 destination-ip 192.0.20.123 source-ip-prefix 10.0.20.1  
  erspan-id 100  
  ip dscp 42  
  ip ttl 16  
  mtu 9216  
  exit  
  source interface eth 1/1 switch 101  
  direction tx  
  filter tenant t1 bd bd1  
  filter tenant t1 vrf vrfl  
no shut
```

An engineer needs to implement a monitoring session that should meet the following requirements:

- * Monitor traffic from leaf to leaf switches on a Cisco ACI network
- * Support filtering traffic from Bridge Domain or VRF

Which configuration must be added to meet these requirements?

- A. application epg epg1 app1
- B. interface eth 1/2 switch 101
- C. application app1 epg epg1
- D. interface eth 1/2 leaf 101

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 84


AN engineer enters these commands while in EEM on a Cisco Nexus 9000 Series Switch.

event manager applet Backup-config
event timer watchdog time 1800 name timer
event cli match "copy running-config startup-config"
what is the result of applying this configuration?

- A. It saves the running configuration every 1800 seconds.
- B. It generates an error because no action is mentioned.
- C. It executes the copy running-config startup-config command.
- D. It blocks the copy running-config startup-config command.

Answer: ([SHOW ANSWER](#))

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/93x/system-management/b-cisco-nexus-9000-series-nx-os-system-management-configuration-guide-93x/b-cisco-nexus-9000-series-nx-os-system-management-configuration-guide-93x_chapter_0100010.html

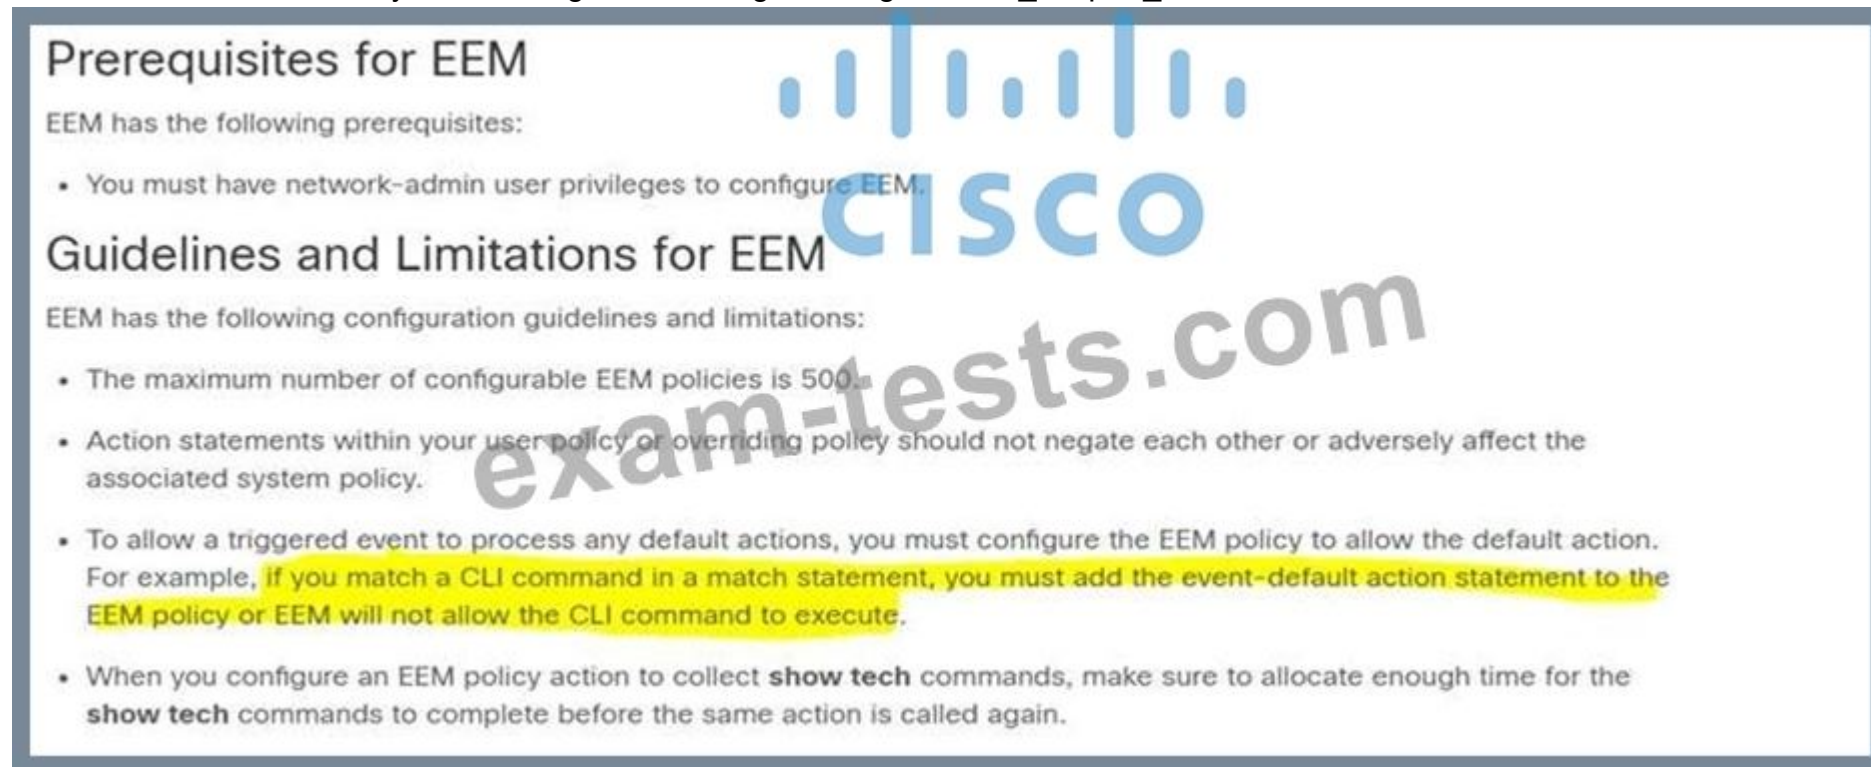

The screenshot shows a Cisco document titled "Prerequisites for EEM" and "Guidelines and Limitations for EEM". It lists prerequisites like network-admin privileges and configuration guidelines such as the 500-policy limit and the requirement to add an event-default action when matching CLI commands. A large "exam-tests.com" watermark is visible across the center.

Prerequisites for EEM

EEM has the following prerequisites:

- You must have network-admin user privileges to configure EEM.

Guidelines and Limitations for EEM

EEM has the following configuration guidelines and limitations:

- The maximum number of configurable EEM policies is 500.
- Action statements within your user policy or overriding policy should not negate each other or adversely affect the associated system policy.
- To allow a triggered event to process any default actions, you must configure the EEM policy to allow the default action. For example, if you match a CLI command in a match statement, you must add the event-default action statement to the EEM policy or EEM will not allow the CLI command to execute.
- When you configure an EEM policy action to collect **show tech** commands, make sure to allocate enough time for the **show tech** commands to complete before the same action is called again.

NEW QUESTION: 85

What is the benefit of adding Cisco HyperFlex Hardware Acceleration Cards to a HyperFlex deployment?

- A. increased compression efficiency
- B. increased network throughput
- C. GPU acceleration
- D. offline encryption acceleration

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 86

A network engineer repeatedly saves a configuration on Catalyst switches to NVRAM using the write memory command. What action should be taken to implement the same action on Nexus switches?

- A. Use the write memory command to save the configuration.
- B. Use the alias command to use the write memory command.

- C. Use the exit command to leave the configuration mode and save the configuration automatically.
- D. Use the wri command to use the copy running-config startup-config command.


Answer: ([SHOW ANSWER](#))

Reference:

<https://community.cisco.com/t5/switching/write-command-on-nexus-switchs/td-p/1958386>

NEW QUESTION: 87

Refer to the exhibit.

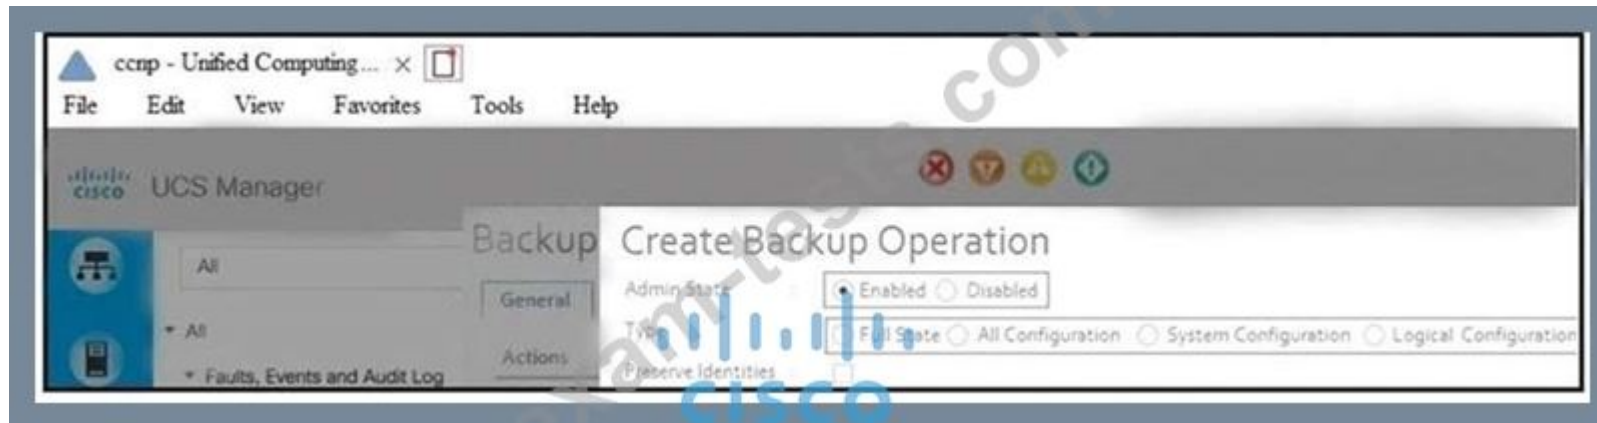

Which backup operation type does not include the Preserve Identities feature?

- A. full state
- B. system configuration
- C. logical configuration
- D. all configuration

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 88

Refer to the exhibit.

```
FI-1# scope org /
FI-1 /org # create maint-policy maintenance
FI-1 /org/maint-policy* # set reboot-policy timer-automatic
FI-1 /org/maint-policy* # set soft-shutdown-timer never
```

Which action must be taken before the maintenance policy can be committed?

- A. Specify a maintenance time by selecting a schedule.
- B. Associate a service profile to the maintenance policy.
- C. Set the soft shutdown timer to a specific time.
- D. Set the policy to apply the changes on the next reboot.

Answer: A ([LEAVE A REPLY](#))

Section: Compute

NEW QUESTION: 89


A customer reports Fibre Channel login requests to a cisco MDS 9000 series Switch from an unauthorized source. The customer requires a feature that will allow all devices already logged in and learned in and learned to be added to the Fibre channel active database. Which two features must be enabled to accomplish this goal? (Choose two.)

- A. Auto-learning
- B. Port security
- C. Enhanced zoning
- D. Device aliases
- E. Smart aliases

Answer: A,B (LEAVE A REPLY)

https://www.cisco.com/en/US/docs/storage/san_switches/mds9000/sw/rel_3_x/configuration/guides/fm_3_3_1/psec.html

NEW QUESTION: 90

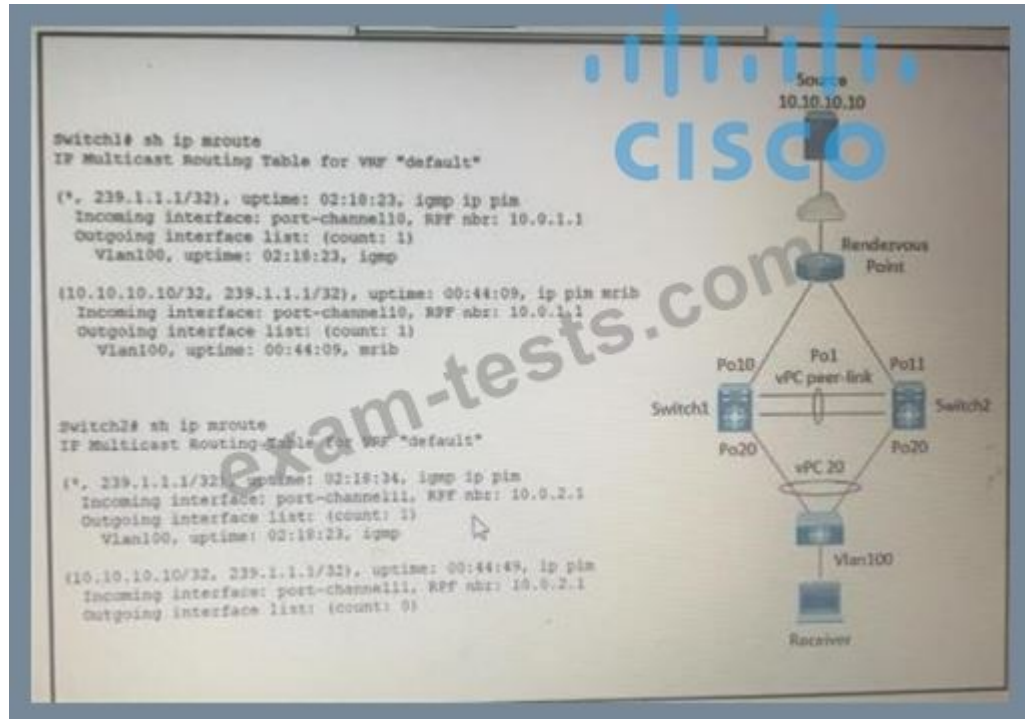

Refer to the exhibit. A host with source address 10.10.10.10. sends traffic to multicast group 239.1.1.1. how do the vPC switches forward the multicast traffic?

- A. If multicast traffic is received on Po11 Switch2, the traffic is forwarded out only one Po20.
- B. If multicast traffic is received on Po10 Switch1, the traffic is forwarded out on Po1 and Po20.
- C. If multicast traffic is received on Po11 and Switch2, the traffic is dropped.
- D. If multicast traffic is received on Switch over the vPC peer-link, the traffic is dropped.

Answer: C (LEAVE A REPLY)

Explanation

<https://www.cisco.com/c/en/us/support/docs/ip/multicast/214140-multicast-forwarding-in-vpc-based-on-loc.html>

NEW QUESTION: 91

What happens to the default host firmware policy after a Cisco UCS Manager upgrade?

- A. It is updated to contain the firmware entries of all the components
- B. It is replaced by a new default policy without any firmware entries.
- C. It is assigned to all the service profiles that include a host firmware policy.
- D. It is set to match the host firmware policy.

Answer: (SHOW ANSWER)

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Firmware-Mgmt/3-1/b_UCSM_GUI_Firmware_Management_Guide_3_1/b_UCSM_GUI_Firmware_Management_Guide_3_1_chapter_0111.html

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:
<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 92

An engineer configures a storage environment for a customer with high-security standards. The secure environment is configured in vsan 50. The customer wants to maintain a configuration and active databases and prevent unauthorized switches from joining the fabric. Additionally, the switches must prevent rogue devices from connecting to their ports by automatically learning the WWPNs of the ports connected to them for the first time. Which two configuration sets must be used to meet these requirements? (Chose two.)


- A ☐ port-security enable
port-security activate vsan 50
- B ☐ clear fabric-binding activate vsan 50
fabric-binding activate vsan 50
- C ☐ fabric-binding activate vsan 50 force
- D ☐ fcsp enable
fcsp auto-active
- E ☐ fcsp dhchap hash md5 sha1

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 93

Refer to the exhibit.

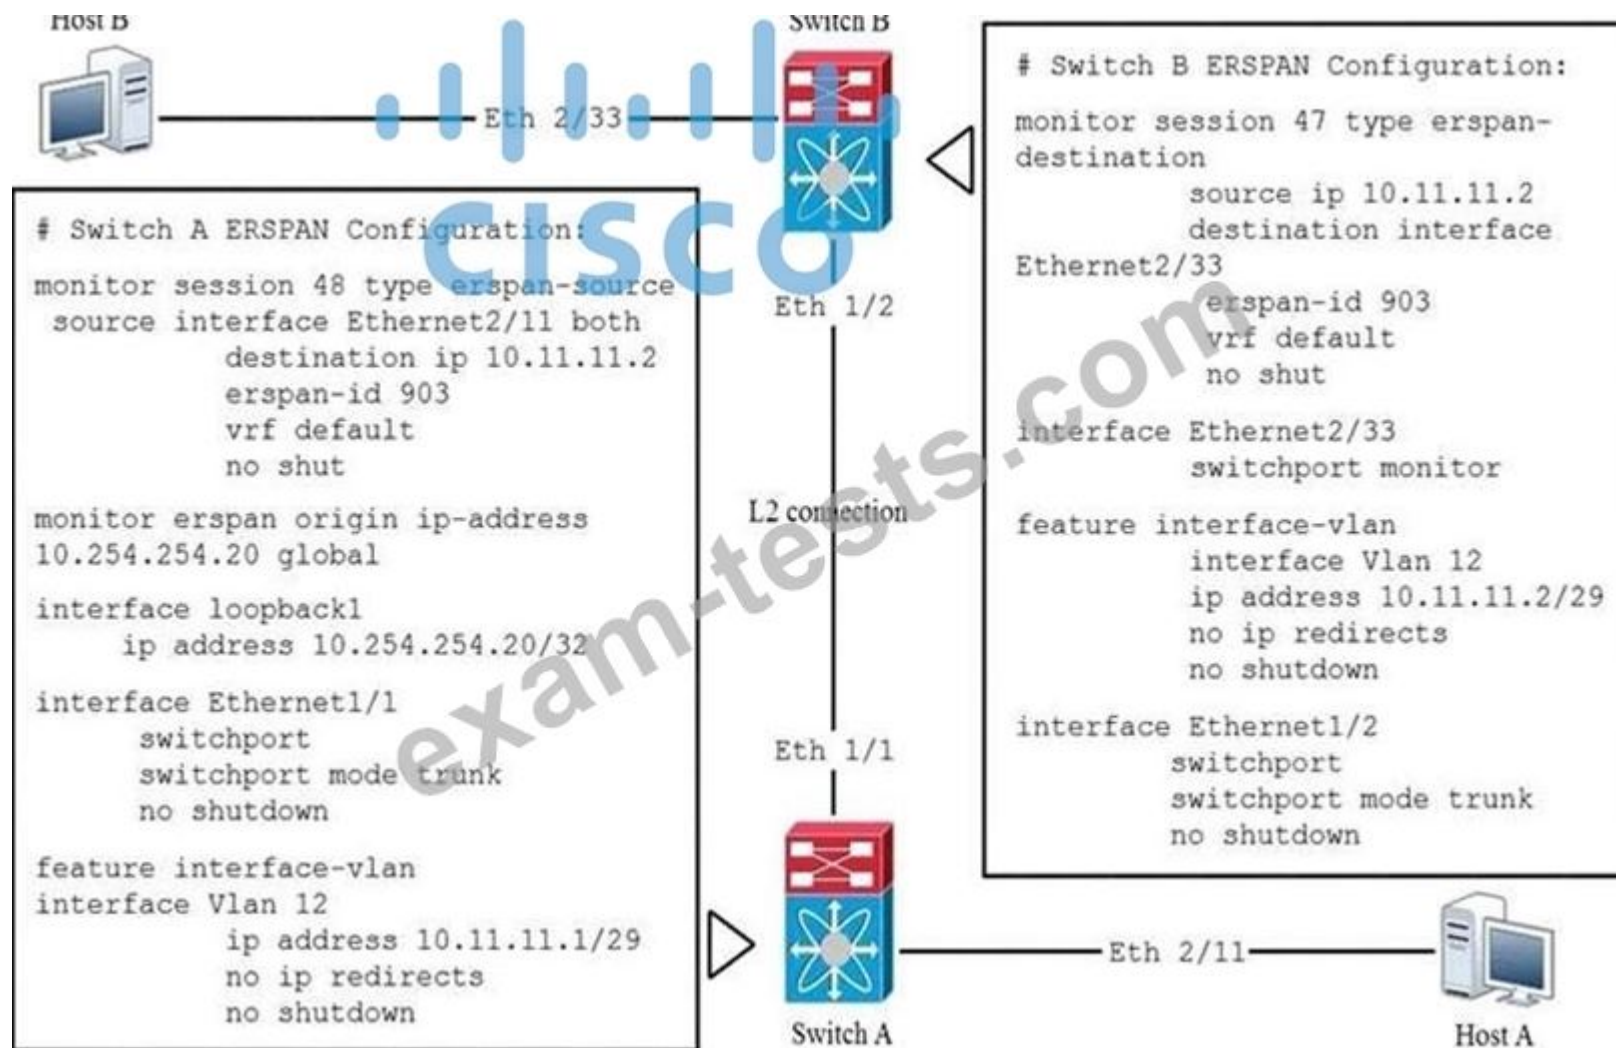

Which statement about the ERSPAN configuration in this environment is true.

- A. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.
- B. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.
- C. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.
- D. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 94

A network engineer must implement RBAC on Cisco MDS 9000 Series Multilayer Switches.

Drag and drop the Cisco MDS 9000 Series roles from the left onto the correct categories on the right.

san-operator	System Defined
global-admin	
server-admin	
storage-admin	User Defined
network-admin	
network-operator	

Answer:

san-operator
global-admin
server-admin
storage-admin
network-admin
network-operator

System Defined
network-admin
network-operator
server-admin
User Defined
san-operator
storage-admin
global-admin

System Defined
network-admin
network-operator
server-admin
User Defined
san-operator
storage-admin
global-admin

NEW QUESTION: 95

What is a feature of NFS?

- A. zone-based access control
- B. Kerberos-based security model
- C. block-based file access
- D. role-based access control

Answer: B ([LEAVE A REPLY](#))

Section: Security

NEW QUESTION: 96

Refer to the exhibit.

```
OTV-Site1# show otv
OTV Overlay Information
Site Identifier 0000.0000.0111
Overlay interface Overlay200
VPN name: Overlay200
VPN state: UP
Extended vlans: 178 2500-2563 (Total:65)
Join interface(s): Eth1/2 (20.1.1.1)
Site vlan: 1999 (up)
AED-Capable: Yes
Capability: Unicast-Only
Is Adjacency Server: Yes
Adjacency Server(s): 20.1.1.1/20.2.1.1
```

A network engineer is setting up a multihomed OTV network. The first site has been set up with a primary and secondary adjacency server. Which configuration must be added on the remote OTV AEDs site?

- A. **interface Overlay200**
otv join-interface Ethernet1/2
otv extend-vlan 178. 2500-2563
otv use-adjacency-server 20.1.1.1 unicast-only
- B. **interface Overlay200**
otv join-interface Ethernet1/2
otv extend-vlan 178. 2500-2563
- C. **interface Overlay200**
otv join-interface Ethernet1/2
otv extend-vlan 178. 2500-2563
otv use-adjacency-server 20.1.1.1 20.2.1.1 unicast-only
- D. **interface Overlay200**
otv join-interface Ethernet1/2
otv extend-vlan 178. 2500-2563
otv adjacency-server unicast-only

- A. Option B
- B. Option D
- C. Option C
- D. Option A

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 97

An engineer configures an intersight virtual application and must claim over 200 targets. The engineer starts the Claim target procedure. The engineer has prepared this initial comma-separated value file to provision the targets:

UCSFI,10.1.1.3,user-1,pwd5516b917
IMC,10.1.1.5/26,user-2,pwdc65b1c43f
HX,10.1.2.1/30,user-3,pwd39860437
UCSD,1.1.1.1,user-4,pwd5003c9d5

Which Information must be included In the comma-separated value flit to provision the targets?

- A. target type, hostname or P address, user name, password
- B. certificate, user name, password. email
- C. FQON, AD name, IP address, email
- D. location, address, name. password

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 98

Which two settings must be configured before enabling a Cisco UCS Manager domain for Cisco Intersight connectivity? (Choose two.)

- A. syslog redirection
- B. NTP servers
- C. SMTP reply-to address
- D. SMTP servers
- E. DNS servers

Answer: B,E ([LEAVE A REPLY](#))

NEW QUESTION: 99

The Cisco Nexus switch Generic Online Diagnostics policy for a PortLoopback test requires 10 consecutive failures to error disable the port. The customer wants to change it to 5 consecutive failures. Which configuration applies the changes for module 1 only?

```
Nexus(config)# event manager applet custom-PortLoopback override __PortLoopback
Nexus(config-applet)# event gold mod all test PortLoopback testing-type bootup consecutive-failure 5
Nexus(config-applet)# action 1 publish-event

Nexus(config)# event manager applet custom-PortLoopback override __PortLoopback
Nexus(config-applet)# event gold mod 1 test PortLoopback testing-type bootup consecutive-failure 5
Nexus(config-applet)# action 1 publish-event

Nexus(config)# event manager applet custom-PortLoopback override __PortLoopback
Nexus(config-applet)# event gold mod all test PortLoopback testing-type monitoring consecutive-failure 5
Nexus(config-applet)# action 1 policy-default

Nexus(config)# event manager applet custom-PortLoopback override __PortLoopback
Nexus(config-applet)# event gold mod 1 test PortLoopback testing-type monitoring consecutive-failure 5
Nexus(config-applet)# action 1 policy-default
```

- A. Option A
- B. Option B

C. Option C

D. Option D

Answer: ([SHOW ANSWER](#))

Explanation

"mod all" is incorrect. "mod 1test" is incorrect. "publish event" is incorrect.

"mod 1 test" is correct. It is with "policy-default".

NEW QUESTION: 100

Refer to the exhibit.



Which backup operation type does not include the Preserve Identities feature?

A. all configuration

B. system configuration

C. full state

D. logical configuration

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 101

A POAP-enabled Cisco Nexus switch will not enter POAP mode. Which two conditions should be verified? (Choose two.)

A. Bootflash must contain a special directory named POAP with poap.py file.

B. The switch is in bootup process.

C. No startup configuration is available.

D. The license file is missing on the switch.

E. No Cisco NX-OS image is present on the bootflash.

Answer: B,C ([LEAVE A REPLY](#))

POAP is an automatic provisioning and zero-touch deployment feature that assists device owners in the initial deployment and configuration of Nexus switches.

The feature works by checking for a local configuration script. If the script has been deleted, the switch has been reset to factory settings, or this is the first boot-up, the POAP daemon will connect to a preset list of servers to download an initial configuration file.

To perform this operation, the switch must first obtain an IP address from a local DHCP server. POAP configuration settings can also be passed through the DHCP response.

Which conditions should be verified, so they need to be TRUE. Like no startup (A) and bootup (B). C means that it needs to miss a license file and E means it needs to miss an NX-OS image.

NEW QUESTION: 102

Refer to the exhibit.

```
<?xml version="1.0" encoding="UTF-8"?><imdata totalCount="1"><error  
code="403" text="Token was invalid (Error: Token timeout)"/></imdata>
```


An engineer configures a new application profile using REST API and receives this error message. Which method can be used before the application profile can be configured?

- A. POST to aaaRefresh
- B. POST to aaaLogout
- C. GET to aaaListDomains
- D. POST to aaaLogin

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 103

A network engineer must determine the cooling requirements for a Cisco UCS C-Series Rack Server. The server with PCIe cards is configured with a fan configuration policy. Which configuration should be used for the fan policy of the server?

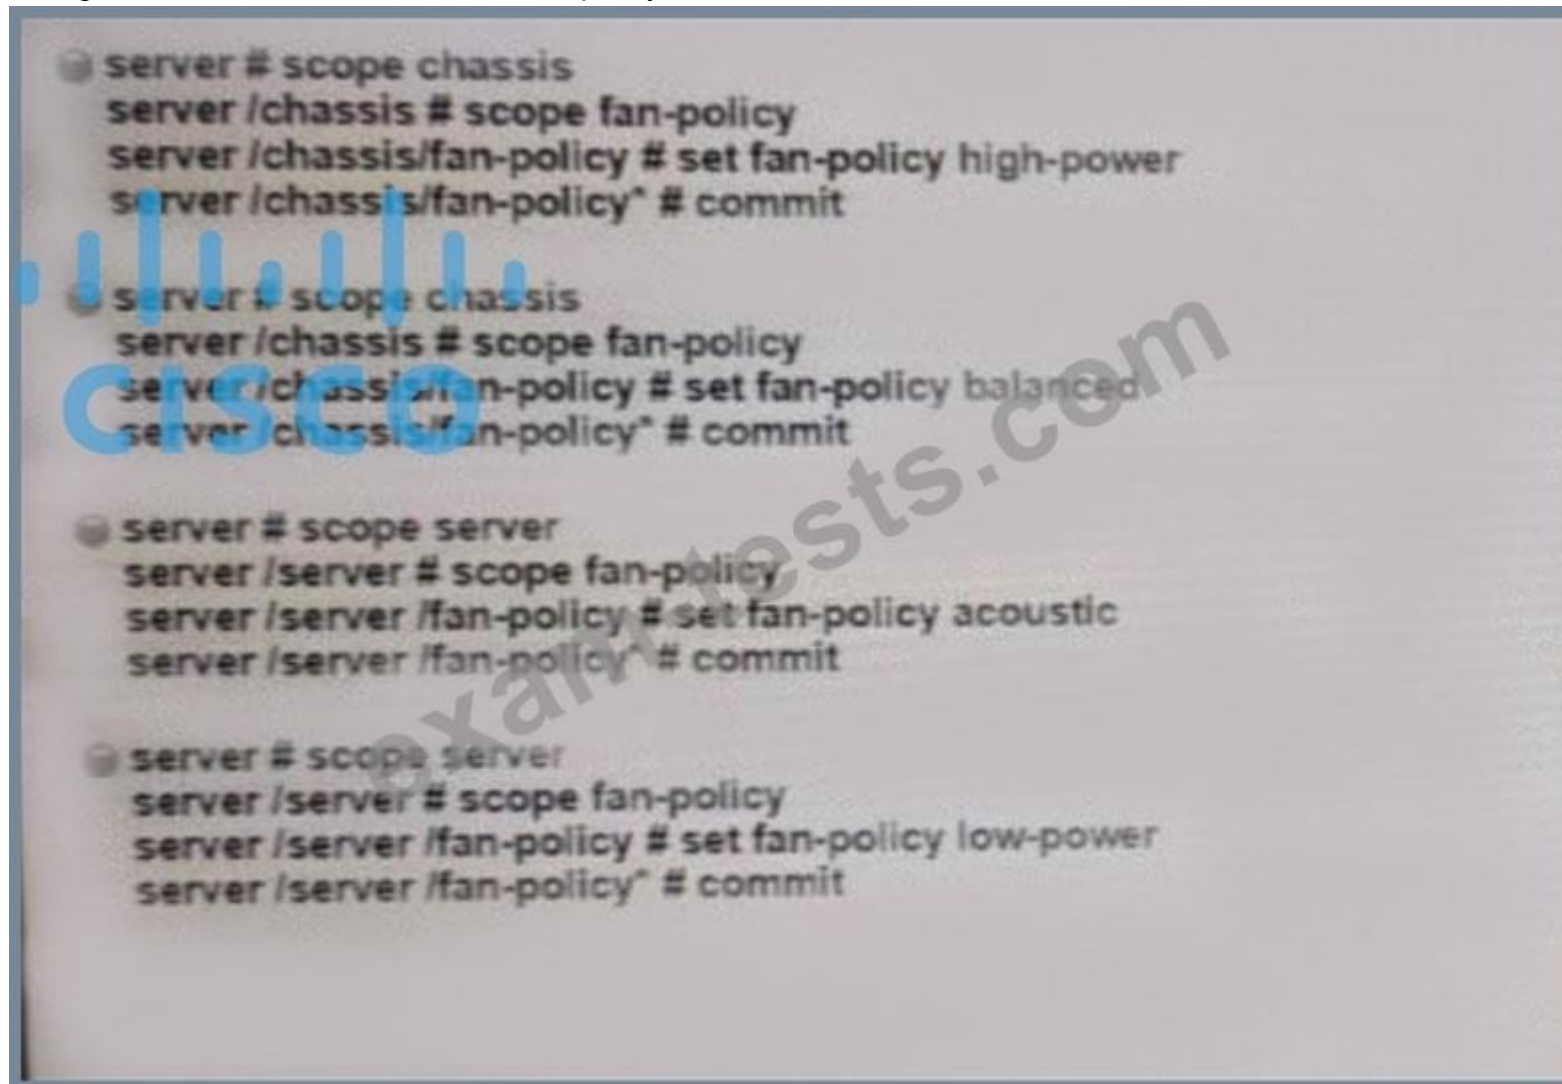

- A. Option D
- B. Option A
- C. Option C
- D. Option B

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 104

Refer to the exhibit.

```
N7K-1
spanning-tree vlan 1-10 priority 8192

vpc domain 100
 role priority 100
 peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
 delay restore 60
 peer-switch
 auto-recovery
 ip arp synchronize

N7K-2
spanning-tree vlan 1-10 priority 8192

vpc domain 100
 role priority 200
 peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
 delay restore 60
 peer-switch
 auto-recovery
 ip arp synchronize
```

The STP priority of N7K-1 and N7K-2 are the lowest in the network. Which statement describes STP on the vPC?

- A. N7K-1 and N7K-2 appear as a single STP root.
- B. N7K-1 appears as the STP root.
- C. N7K-1 preempts N7K-2 as the STP root.
- D. N7K-2 appears as the STP root.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 105

Refer to the exhibit.

```
NEXUS (config)# feature tacacs+
NEXUS (config)# tacacs-server timeout 5
NEXUS (config)# tacacs-server directed-request
NEXUS (config)# tacacs-server deadtime 0
NEXUS (config)# tacacs server host 10.1.50.20 port 49
NEXUS (config)# tacacs-server host 10.1.50.20 key 7 "Flwhg123" timeout 1
NEXUS (config)# aaa group server tacacs+ ISE
NEXUS (config-tacacs+)# server 10.1.50.20
NEXUS (config-tacacs+)# deadtime 10
NEXUS (config-tacacs+)# use-vrf management
NEXUS (config-tacacs+)# source-interface mgmt 0
NEXUS (config)# aaa authentication login default group ISE
```

What is the result of implementing this configuration?

- A. The timeout value on the TACACS+ server is 10 seconds.
- B. The switch queries the TACACS+ server by using a clear text PAP login.
- C. The switch queries the TACACS+ server by using an encrypted text PAP login.
- D. The TACACS+ server uses the type-6 encrypted format.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 106

Which two authentication types does Cisco UCS Manager support when configuring authentication? (Choose two.)

- A. PAM
- B. local
- C. 802.1X
- D. Kerberos
- E. LDAP

Answer: B,E ([LEAVE A REPLY](#))

Section: Security

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 107

Which command reduces the amount of time it takes to complete the ISSU on a Cisco Nexus 7000 series switch that has dual supervisor modules and two I/O modules?

- A. install all kickstart <image>system<image>parallel
- B. install all epfd bootflash:<image>

- C. install all epd bootflash:<image>
D. install all kickstart<image>system<image>

Answer: A (LEAVE A REPLY)

Parallel Upgrade

Parallel Upgrade with I/O Modules

Starting with Cisco NX-OS Release 5.2(1), multiple linecards can be simultaneously upgraded, and the infrastructure support is available. This decreases the ISSU time when compared with an ISSU upgrade that is done serially (one card at a time).

To start a parallel upgrade, use the following command: `install all kickstart image system image parallel`

Up to three linecards can be upgraded in parallel with this command. During the upgrade process, the upgrade of the linecards is displayed in the output as follows:

```
Non-disruptive upgrading.  
[#          ] 0%  
Module 5 upgrade completed successfully.
```

```
Module 3 upgrade completed successfully.
```



https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus7000/sw/upgrade/guide/cisco_nexus7000_software_upgrade_and_downgrade_guide_8x.html

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/7_x/nx-os/upgrade/guide/b_Cisco_Nexus_7000_Series_NX-OS_Software_Upgrade_and_Downgrade_Guide_Release_7-x.html#d54e307a1635

NEW QUESTION: 108

An engineer has a primary fabric that is named UCS-A and a secondary fabric that is named UCS-B. A certificate request that has a subject name of sjc2016 for a keyring that is named kr2016 needs to be created.

The cluster IP address is 10.68.68.68.

Which command set creates this certificate request?

A. UCS-A # scope keyring kr2016

UCS-A /keyring # create certreq 10.68.68.68 sjc2016

UCS-A /keyring* # commit-buffer

B. UCS-B # scope keyring kr2016

UCS-B /keyring # create certreq ip 10.68.68.68 subject-name sjc2016

UCS-B /keyring* # commit-both

C. UCS-B# scope security

UCS-B /security # scope keyring kr2016

UCS-B /security/keyring # set certreq 10.68.68.68 sjc2016

UCS-B /security/keyring* # commit-both

D. UCS-A# scope security

UCS-A /security # scope keyring kr2016

UCS-A /security/keyring # create certreq ip 10.68.68.68 subject-name sjc2016 UCS-A /security/keyring* # commit-buffer

Answer: D (LEAVE A REPLY)


NEW QUESTION: 109

Drag and drop the characteristics from the left onto the correct storage systems on the right.


expensive and complex to manage
moderately expensive and simple to configure
most resilient, highly scalable, and high-performance storage
appliance providing file system access
lacks scalability, performance, and advanced features

NAS
SAN

Answer:

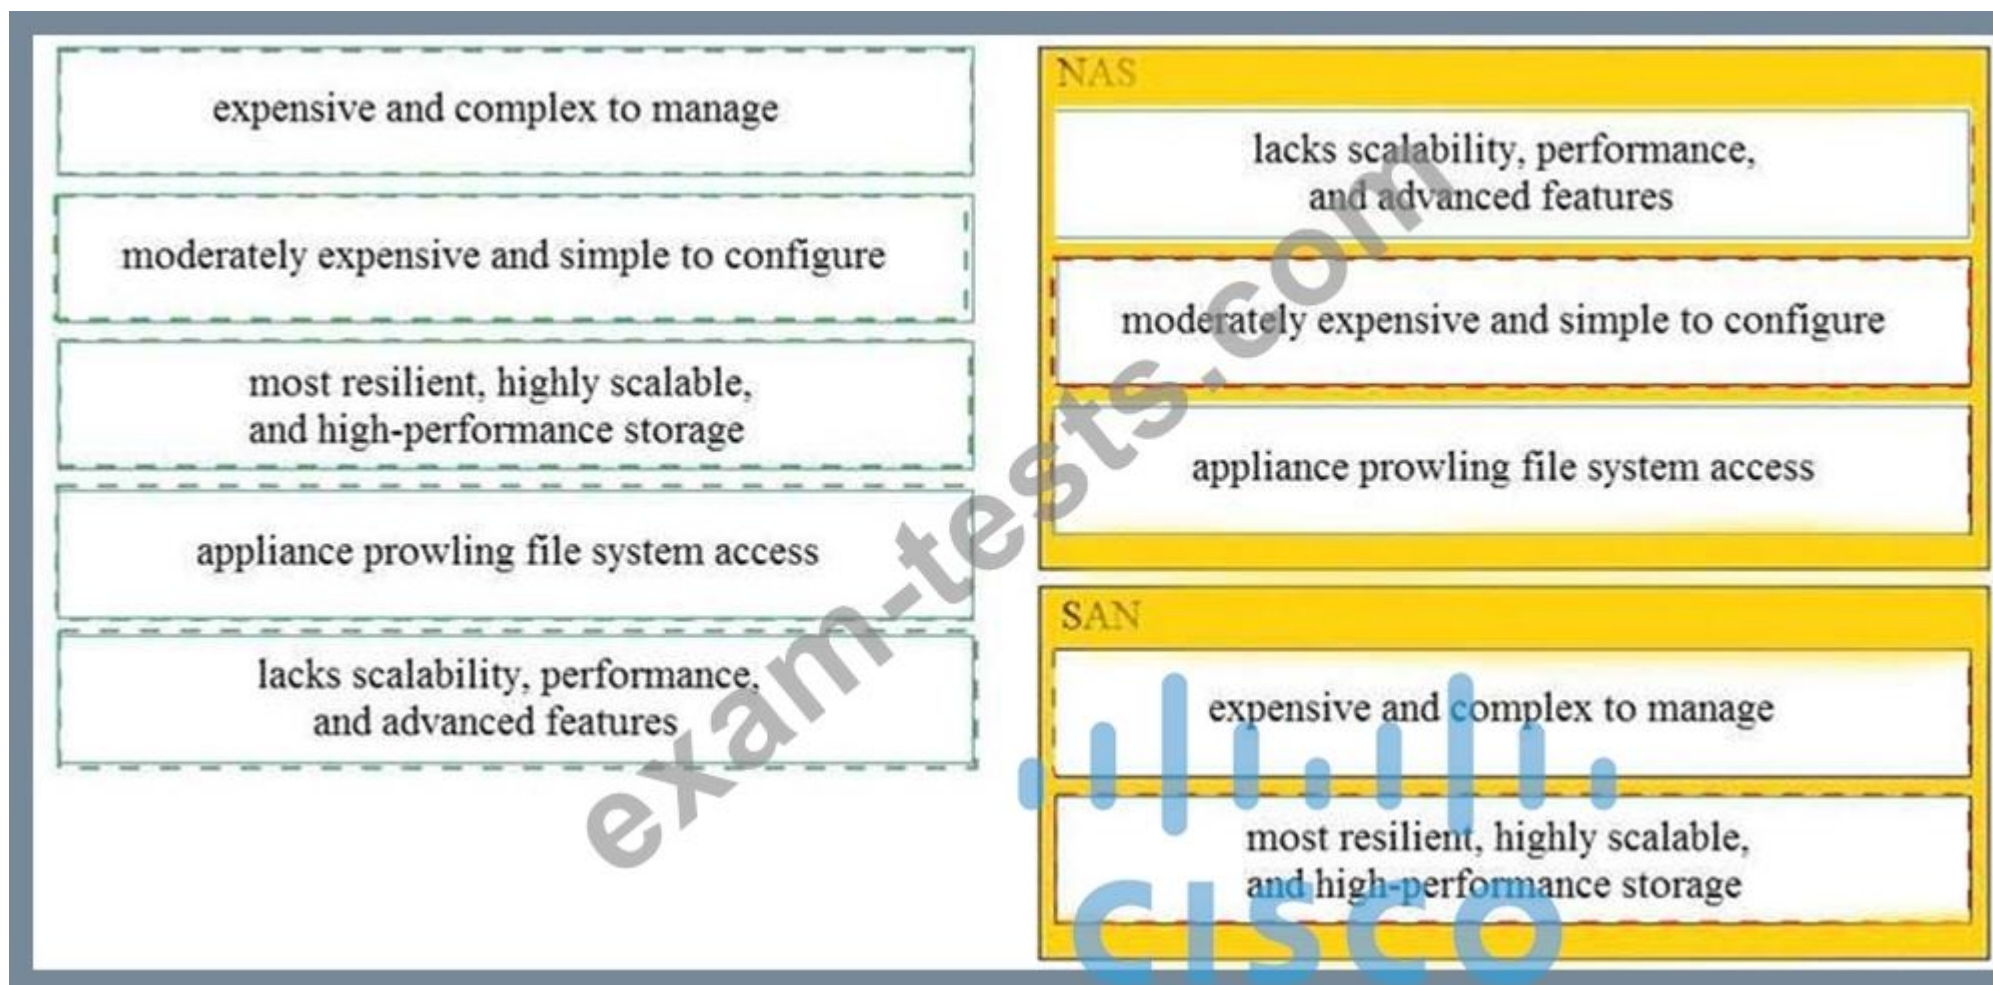

Explanation

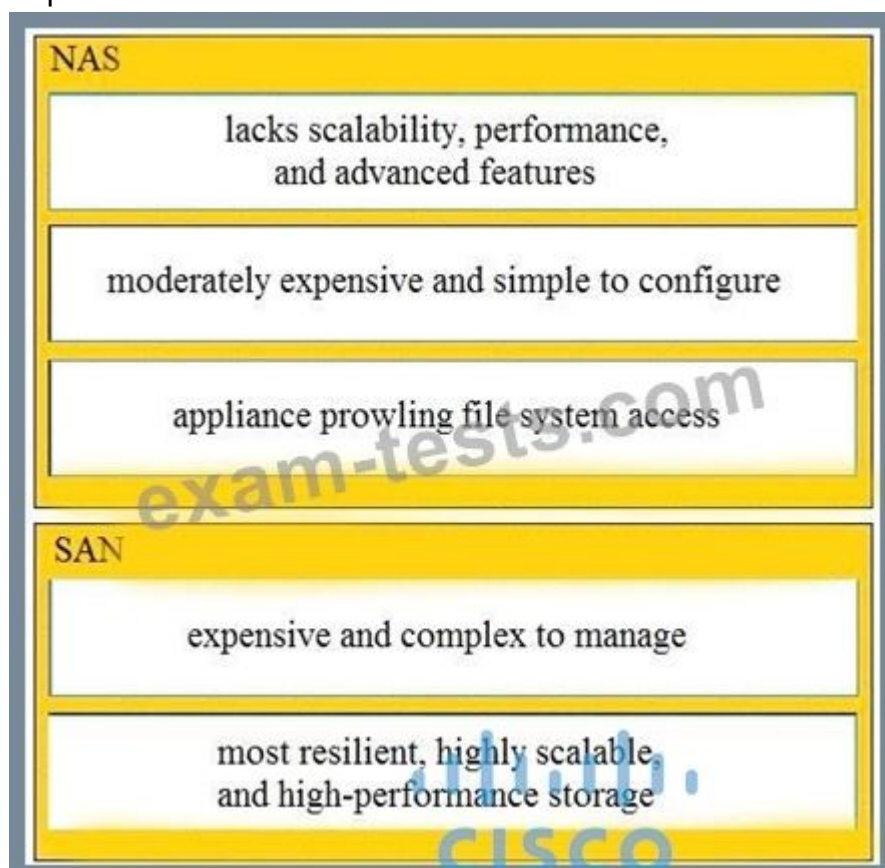

2,4,5 - NAS 1,3 - SAN

NEW QUESTION: 110

Which two settings must be configured before enabling a Cisco UCS Manager domain for Cisco Intersight connectivity? (Choose two.)

- A. syslog redirection
- B. DNS servers
- C. SMTP servers
- D. NTP servers
- E. SMTP reply-to-address

Answer: ([SHOW ANSWER](#))

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Admin-Management/4-1/b_Cisco_UCS_Admin_Mgmt_Guide_4-1/m_gui_cisco_intersight_management.html

NEW QUESTION: 111

Refer to the exhibit.

```
N7K-1
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.2/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    preempt
    priority 150
    ip 10.16.165.1

vpc domain 100
  role priority 100
  peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize

N7K-2
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.3/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    priority 50
    ip 10.16.165.1

vpc domain 100
  role priority 200
  peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize
```

Which statement about the default gateway configuration of the vPC is true?

- A. N7K-2 forwards traffic that is destined for the default gateway by using the peer link.
- B. N7K-2 acts as the default gateway for all traffic.
- C. N7K-1 acts as the default gateway for all traffic.
- D. Either switch can act as the active default gateway.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 112

Port security is statically configured on a Cisco Nexus 7700 Series switch and F3 line card. The switch is configured with an Advanced Services license. Which two actions delete secured MAC addresses from the interface? (Choose Two)

- A. The address must be removed from the configuration.
- B. The address must reach the age limit that is configured for the interface.
- C. The interface must be converted to a routed port.
- D. The device must be restarted manually.
- E. Shutdown and then no shutdown must be run on the interface.

Answer: A,C (LEAVE A REPLY)

Explanation

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/6_x/nx-os/security/configuration/guide/b_Cisco_N

Static Method

The static learning method allows you to manually add or remove secure MAC addresses to the running configuration of an interface. If you copy the running configuration to the startup configuration, static secure MAC addresses are unaffected if the device restarts.

A static secure MAC address entry remains in the configuration of an interface until one of the following events occurs:

- You explicitly remove the address from the configuration.
- You configure the interface to act as a Layer 3 interface.

Adding secure addresses by the static method is not affected by whether dynamic or sticky address learning is enabled.




NEW QUESTION: 113

An engineer must upgrade a Cisco Nexus 9500 Series Switch. The requirement is for all switch components to be upgraded in batches. Drag and drop the components from the left into the order in which they should be upgraded, on the right, for the upgrade process to complete successfully Not all components are used.

fabric modules	Step 1
FEXs	Step 2
fan modules	Step 3
supervisors	Step 4
system controllers	Step 5
line cards	

Answer:

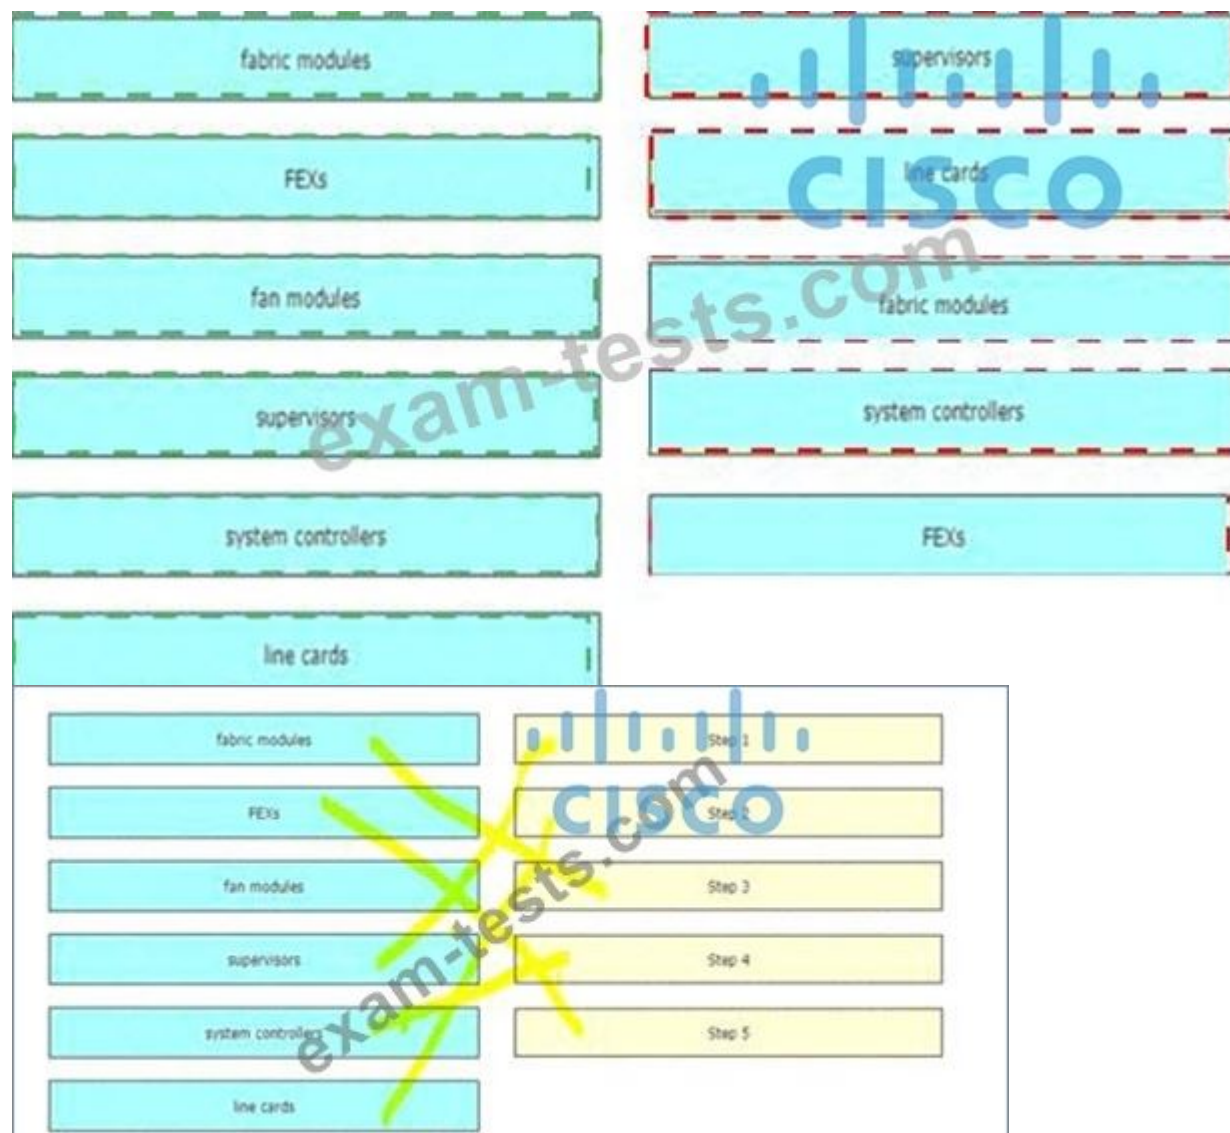

NEW QUESTION: 114

Refer to the exhibit.

Nexus# show vpc peer-keepalive | i Keepalive

--Keepalive interval : 1000 msec
--Keepalive timeout : 5 seconds
--Keepalive hold timeout : 3 seconds
--Keepalive vrf : management
--Keepalive udp port : 3200
--Keepalive tos : 192

Nexus# ethanalyzer local interface mgmt limit-captured-frames 1000

Capturing on mgmt0

2019-06-15 12:01:51.242597 192.168.254.11 -> 192.168.254.3 ICMP Echo (ping) request
2019-06-15 12:01:51.242860 192.168.254.3 -> 192.168.254.11 ICMP Echo (ping) reply
2019-06-15 11:50:15.975474 192.168.254.1 -> 192.168.254.3 TCP 47540 -> bootps [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.975547 192.168.254.3 -> 192.168.254.1 TCP 29 -> 47540 [RST, A CK] Seq=1 Ack=1 Win=0 Len=0
2019-06-15 11:50:15.975564 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 44 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.975924 192.168.254.1 -> 192.168.254.3 TCP 47540 -> discard [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.976027 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 97 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:15.976381 192.168.254.1 -> 192.168.254.3 TCP 47540 -> 35 [SYN] Seq=0 Win=1024 Len=0 MSS=1460
2019-06-15 11:50:16.661845 192.168.254.3 -> 192.168.254.4 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:16.761147 00:8e:73:a2:41:13 -> 01:80:c2:00:00:00 STP Conf. Root = 8192/10/ec:e1:a9:df:6c:80 Cost = 22 Port = 0x8013
2019-06-15 11:50:16.853248 192.168.254.4 -> 192.168.254.3 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.326253 192.168.254.1 -> 192.168.254.3 SSH Encrypted request packet len=52
2019-06-15 11:50:17.327313 192.168.254.3 -> 192.168.254.1 SSH Encrypted response packet len=1348
2019-06-15 11:50:17.377246 192.168.254.4 -> 239.255.70.83 UDP Source port: 7546 Destination port: 7546
2019-06-15 11:50:17.552215 192.168.254.1 -> 192.168.254.3 TCP 14139 -> ssh [ACK] Seq=365 Ack=11277 Win=63546 Len=0
2019-06-15 11:50:17.661764 192.168.254.3 -> 192.168.254.4 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.653242 192.168.254.4 -> 192.168.254.3 UDP Source port: 3200 Destination port: 3200
2019-06-15 11:50:17.872637 8c:60:4f:aa:c2:e1 -> 01:80:e7:00:00:0e LLDP Chassis : d = 8c:60:41:aa:c2:e1 Port Id = mgmt0 TTL = 120
2019-06-15 11:50:08.173056 192.168.256.3 -> 192.168.254.2 NTP NTP client
2019-06-15 11:50:08.173256 192.168.256.2 -> 192.168.254.3 NTP NTP server

A flapping link issue has been reported on the vPC keepalive link. A packet capture has been activated on the Cisco Nexus switch. What is the destination IP address of the vPC keepalive packets that are sent by the switch?

- A. 192.168.254.4
- B. 192.168.254.2
- C. 239.255.70.83
- D. 192.168.254.1

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 115

An engineer must recover configuration on a Cisco MDS 9000 Series switch from a previous version that was backed up to bootflash and then verify the restoration.

Drag and drop the commands on the left to the correct order on the right.

copy bootflash:<configuration_file> running-config	Step 1
copy running-config startup-config	Step 2
show startup-config	Step 3
write erase	Step 4
reload	Step 5

Answer:

copy bootflash:<configuration_file> running-config	write erase
copy running-config startup-config	reload
show startup-config	copy bootflash:<configuration_file> running-config
write erase	copy running-config startup-config
reload	show startup-config

Explanation

write erase
reload
copy bootflash:<configuration_file> running-config
copy running-config startup-config
show startup-config

NEW QUESTION: 116

Refer to the exhibit.

```
show install all impact epld bootflash:n9000-epld.6.1.2.I3.1.img
```


What is the outcome of this command when the EPLD is updated on a Cisco Nexus 9000 series switch?

- A. displays the compatibility of the EPLD upgrade and the image in the bootflash
- B. shows a simulated upgrade of the EPLD
- C. upgrades the EPLD on the switch disruptively
- D. displays the impact of the upgrade on the operation of the switch

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 117

A Cisco UCS C-Series server is installed at a data center. The server should be managed by the Cisco UCS Manager by using a single cable for management and data traffic. Which configuration should be applied after the Physical connection is established?

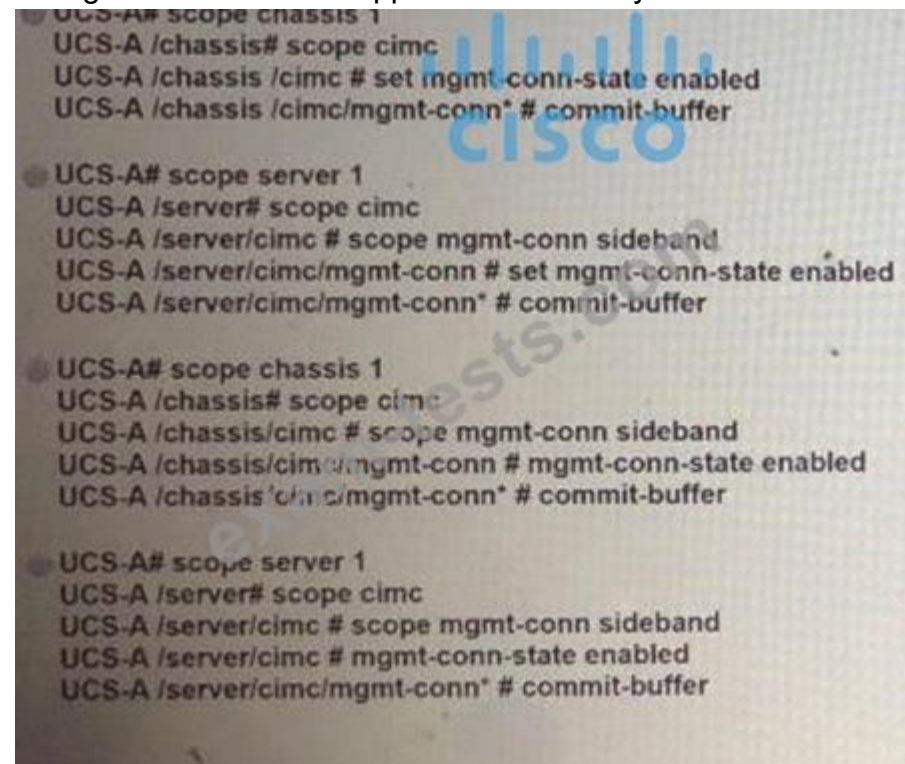

```
UCS-A# scope chassis 1
UCS-A /chassis# scope cimc
UCS-A /chassis /cimc # set mgmt-conn-state enabled
UCS-A /chassis /cimc/mgmt-conn* # commit-buffer

UCS-A# scope server 1
UCS-A /server# scope cimc
UCS-A /server/cimc # scope mgmt-conn sideband
UCS-A /server/cimc/mgmt-conn # set mgmt-conn-state enabled
UCS-A /server/cimc/mgmt-conn* # commit-buffer

UCS-A# scope chassis 1
UCS-A /chassis# scope cimc
UCS-A /chassis/cimc # scope mgmt-conn sideband
UCS-A /chassis/cimc/mgmt-conn # mgmt-conn-state enabled
UCS-A /chassis/cimc/mgmt-conn* # commit-buffer

UCS-A# scope server 1
UCS-A /server# scope cimc
UCS-A /server/cimc # scope mgmt-conn sideband
UCS-A /server/cimc # mgmt-conn-state enabled
UCS-A /server/cimc/mgmt-conn* # commit-buffer
```

- A. Option A
- B. Option C
- C. Option B
- D. Option D

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 118

An engineer is asked to modify an overridden policy by changing the number of FCNS database entries to 1500 and then generate a message.

What Configuration will accomplish this task?

A. event manager applet fcns_policy

event fcns entries max-per-switch 1500

action 1.0 syslog priority warnings msg FCNS DB entries have reached the EEM limit action 2.0 policy-default

B. event manager applet fcns_policy override __fcns_entries_max_per_switch action 1.0 syslog priority errors "CNS DB entries have reached the EEM limit" action 2.0 policy-default

C. event manager applet fcns_policy override __fcns_entries_max_per_switch event fcns entries max-per-switch 1500 action 1.0 syslog priority warnings msg FCNS DB entries have reached the EEM limit

D. event manager applet fcns_policy

action 1.0 syslog priority warnings msg FCNS DB entries have reached the EEM limit action 2.0 event-default

Answer: C ([LEAVE A REPLY](#))

Section: Automation

NEW QUESTION: 119

An engineer is implementing OTV on a transport that supports multicast. The solution needs to meet the following requirements:

* Establish adjacency to the remote peer by using multicast.

* Enable OTV advertisements for VLAN 100 to the other site.

Which two commands should be configured to meet these requirements? (Choose two.)

A. otv site-vlan 100

B. otv data-group 232.2.2.0/28

C. otv use-adjacency-server 172.27.255.94

D. otv extend-vlan 100

E. otv control-group 232.1.1.1

Answer: D,E ([LEAVE A REPLY](#))

Explanation

https://www.cisco.com/c/dam/en/us/products/collateral/switches/nexus-7000-series-switches/guide_c07-728315.

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/nx-os/OTV/config_guide/b_Cisco_Nexus_7000_S

NEW QUESTION: 120

An engineer must configure OSPF in the data center. The external routes have already been redistributed OSPF. The network must meet these criteria:

* The data centre servers must reach services in the cloud and the services behind the redistributed routes.

* The exit point toward the internet should be propagated only when there is a dynamically learned default route from the upstream router.

Which feature is required?

A. Default-information originate

B. Stubby area

C. Totally stubby area

D. Default-information originate always

Answer: A ([LEAVE A REPLY](#))

<https://learningnetwork.cisco.com/s/question/0D53i00000Kt544/defaultinformationoriginate-always>

NEW QUESTION: 121

An engineer is implementing Cisco Intersight in a secure environment. The environment must use LDAP directory service and ensure information integrity and confidentiality. Which two steps must be taken to implement the solution? (Choose two.)

- A. Add a trusted root LDAP certificate to Cisco Intersight
- B. Enable Certificate Signing Request in Cisco Intersight.
- C. Add a trusted OAuth token to Cisco Intersight
- D. Enable Encryption for LDAP
- E. Add a self-signed LDAP certificate to Cisco Intersight.

Answer: A,D ([LEAVE A REPLY](#))

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 122

Which two authentication types does Cisco UCS Manager support when configuration authentication?

(Choose two.)

- A. 802.1X
- B. LDAP
- C. Kerberos
- D. local
- E. PAM

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 123

APIC EPG Resolution Immediacy is set to "Immediate".

Which statement is true about the Deployment Immediacy for VMM domains associated to EPGs?

- A. The "Immediate" and "On demand" options require a port group to be created on the VDS.
- B. If "On demand" is selected, the policy is programmed in the hardware only when the APIC detects a VM created in the EPG.
- C. If "On demand" is selected, the policy is programmed in the hardware only when the first packet is received through the data path.
- D. If "Immediate" is selected, the policy is programmed in the hardware as soon as the leaf is booted.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 124

A customer has a requirement to deploy a cloud service and needs to have full control over the underlying OS, data and application. Which cloud model meets this requirement?

- A. SaaS
- B. MaaS
- C. PaaS
- D. IaaS

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 125

An engineer is implementing FCoE. Which aspect of DCBXP on a Cisco Nexus switch affects this implementation?

- A. It uses the Cisco Fabric Services protocol to exchange parameters between two peer links.
- B. It always is enabled on 10/100-Mbps native Ethernet ports.
- C. It provides the authentication of peers on the Cisco Nexus switch.
- D. It requires that LLDP transmit and LLDP receive are enabled on the FCoE interface.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 126

Refer to the exhibit.

```
show install all impact epld bootflash:n9000-epld.6.1.2.I3.1.img
```

What is the outcome of this command when the EPLD is updated on a Cisco Nexus 9000 series switch?

- A. shows a simulated upgrade of the EPLD
- B. upgrades the EPLD on the switch disruptively
- C. displays the impact of the upgrade on the operation of the switch
- D. displays the compatibility of the EPLD upgrade and the image in the bootflash

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 127

When deploying a Cisco HyperFlex edge with a pair of switches, what is the minimum number of interfaces in trunk mode required on each HX node?

- A. 1
- B. 6
- C. 4
- D. 2

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 128

An engineer must configure multiple EPGs on a single access port in a large Cisco ACI fabric without using VMM integration. The relevant access policies and tenant policies have been created. A single AAEP is used to configure the access port in the fabric. Which two additional steps must be taken to complete the configuration? (Choose two.)

- A. The corresponding bridge domains must be configured in legacy mode
- B. A contract must be defined between the EPGs
- C. The EPGs must link directly to the corresponding AAEP
- D. The EPGs must be linked to the correct physical domain
- E. The EPGs must be configured as static ports

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 129

Refer to the exhibit.

```

1.136261 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:e1:a9:df:6c:80 Cost = 22 Port = 0x800e
1.373417 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
1.570377 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=105
Win=32786 Len=0
1.815558 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
2.021840 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=157
Win=32773 Len=0
2.525173 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
2.731382 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=209
Win=32760 Len=0
2.947365 192.168.254.13 -> 192.168.254.1 NTP 90 NTP Version 2, client
2.947623 192.168.254.1 -> 192.168.254.13 NTP 90 NTP Version 2, server
3.138157 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:e1:a9:df:6c:80 Cost = 22 Port = 0x800e
3.139400 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
3.270728 192.168.254.4 -> 239.255.70.83 UDP 166 Source port: cfs Destination port:
cfs
3.341123 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=261
Win=32747 Len=0
3.835409 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
4.041411 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=313
Win=32734 Len=0
4.535284 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
4.741072 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=365
Win=32721 Len=0
4.947308 192.168.254.13 -> 192.168.254.1 NTP 90 NTP Version 2, client
4.947519 192.168.254.1 -> 192.168.254.13 NTP 90 NTP Version 2, server
5.139627 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:e1:a9:df:6c:80 Cost = 22 Port = 0x800e
5.140827 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52

```

Cisco Fabric Services is enabled in the network. Which type of IP address is used by the Cisco Fabric Services protocol?

- A. IPv4 unicast address
- B. IPv4 multicast address
- C. IPv4 gateway address
- D. IPv4 anycast address

Answer: B ([LEAVE A REPLY](#))

```

1.130599 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=53
Win=32449 Len=0
1.136261 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:el:a9:df:6c:80 Cost = 22 Port = 0x800e
1.373417 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
1.570377 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=105
Win=32786 Len=0
1.815558 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
2.021840 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=157
Win=32773 Len=0
2.525173 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
2.731382 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=209
Win=32760 Len=0
2.947365 192.168.254.13 -> 192.168.254.1 NTP 90 NTP Version 2, client
2.947623 192.168.254.1 -> 192.168.254.13 NTP 90 NTP Version 2, server
3.138157 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:el:a9:df:6c:80 Cost = 22 Port = 0x800e
3.139400 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
3.270728 192.168.254.4 -> 239.255.70.83 UDP 166 Source port: cfs Destination port:
cfs
3.341123 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=261
Win=32747 Len=0
3.835409 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
4.041411 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=313
Win=32734 Len=0
4.535284 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52
4.741072 192.168.254.1 -> 192.168.254.13 TCP 60 29652 > ssh [ACK] Seq=1 Ack=365
Win=32721 Len=0
4.947308 192.168.254.13 -> 192.168.254.1 NTP 90 NTP Version 2, client
4.947519 192.168.254.1 -> 192.168.254.13 NTP 90 NTP Version 2, server
5.139627 00:8e:73:a2:41:0e -> Spanning-tree-(for-bridges)_00 STP 60 Conf. Root =
8192/10/ec:el:a9:df:6c:80 Cost = 22 Port = 0x800e
5.140867 192.168.254.13 -> 192.168.254.1 SSH 106 Encrypted response packet len=52

```

Valid 350-601 Dumps shared by BraindumpsPass.com for Helping Passing 350-601 Exam! BraindumpsPass.com now offer the **newest 350-601 exam dumps**, the BraindumpsPass.com 350-601 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com 350-601 dumps with Test Engine here:

<https://www.braindumpsPass.com/Cisco/350-601-practice-exam-dumps.html> (755 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)