

Huawei.H12-831_V1.0-ENU.v2024-02-23.q165

Exam Code:	H12-831_V1.0-ENU
Exam Name:	HCIP-Datcom-Advanced Routing & Switching Technology V1.0
Certification Provider:	Huawei
Free Question Number:	165
Version:	v2024-02-23
# of views:	1179
# of Questions views:	1650
https://www.exam-tests.com/H12-831_V1.0-ENU-exam/Huawei.H12-831_V1.0-ENU.v2024-02-23.q165.html	

NEW QUESTION: 1

If the Sticky MAC function of the interface is enabled, what is the number of MAC addresses learned by the interface by default?

- A. 10
- B. 1
- C. 5
- D. 15

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 2

Which of the following descriptions is correct about configuring static LSPs in MPLS networks?

- A. when a certain LSR for Transit LSR need to be configured at the same time In Label and Out Label, The range is 16-1023
- B. when a certain LSR for Ingress LSR, just configure Out Label, The range is 16~1048575
- C. when a certain LSR for Transit LSR, you need to configure In Label and Out label In Label The range is 16~1023, Out Label The range is 16~1048575
- D. when a certain LSR for Egress LSR, you only need to configure In Label, The range is 16-1023

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 3

What is the value of the linkage between OSPF and BFD?

- A. Detected at the millisecond level BFD. association OSPF state, fulfilled OSPF The purpose of quickly sensing the status of the tank
- B. BFD The message sending interval can reach the millisecond level, which is less than OSPF Induction link status is slow
- C. BFD Any change in state will not affect OSPF neighbor state

D. OSPF hello The sending interval is in seconds, more than BFD induction link status is fast

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 4

In the intra-domain MPLS VPN network, when the data packet enters the public network and is forwarded, it will be encapsulated with two layers of MPLS labels. Which of the following description of the two layers of labels is wrong?

- A. By default, the outer label is ejected before the packet is forwarded to the last-hop device
- B. The outer label of MPLS VPN is called the private network label, and the inner label is called the public network label.
- C. The outer label of MPLS VPN is allocated by the LDP protocol or statically, and the inner label is allocated by the MP-BGP neighbor at the correct end.
- D. The outer label is used to correctly send the data packet to the corresponding VPN on the PE device

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 5

In the LDP session establishment process, the active party will first send the Initialization information for parameter negotiation, and if the passive party does not accept the negotiation parameters, it will send _____ .

- A. Hello Message
- B. Initialization Message
- C. Keepalive Message
- D. Error Notification Message

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 6

As shown in the figure, a network has deployed IPv6 for business testing, the network has 4 routers. run OSPFv3 to realize network interconnection. about the OSPFv3 network generated LSA. Which of the following statement it's wrong?



A. R1 of LSDB have R3 produced Network LSA. illustrate R3 may be from this link DR

B. R1 will receive R2 produced individual Link-LSA. Describe separately R2 information about the two links connected

C. R1 will produce Router-LSA. Describing the device interface information will be received at the same time R2 and R3 produced Router-LSA

D. R2 as A, B, R will produce Inter-Area-Prefix-LSA describe Area 1 of IPv6 address prefix, and advertise Give R1 and R3

Answer: B (LEAVE A REPLY)

NEW QUESTION: 7

After the cutover acceptance is completed. what work still needs to be performed in the closing stage?

A. field defense

B. Acceptance summary

C. Transfer training

D. data transfer

Answer: A,B,C,D (LEAVE A REPLY)

NEW QUESTION: 8

Which of the following statements about MPLS header TTL is correct?

A. Banned from holding shells TTL in the case of, tracer can see passing MPLS Domain LSR

B. MPLS correct to TTL is handled in two ways. one is IP message is entering MPLS when the network MPLS head TTL copy IP TTL Value: The other is at the entrance LER will MPLS head TTL system-settings for 255

C. Can prevent infinite loop forwarding of packets

D. copy IP TTL The way the value is handled is hidden MPLS Domain LSR Played a role in the safety of the lake

Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 9

In an MPLS network, there are different types of operations for labels, among which the meaning of the "pop" action is?

A. Replace the top label with another set of labels

B. Remove the top label from the MPLS label stack

C. Replace the top label with another value

D. Add the top label to the MPLS label stack

Answer: (SHOW ANSWER)

NEW QUESTION: 10

When B, C, I MPLS TP VPN is deployed. the OSPF VPN Route Tag (VPN Route Tag) is not transmitted in the extended community attribute of MP-BGP, but the local concept is only meaningful on PE routers that receive MP-BGP routes and generate OSPF LSAs.

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 11

Which of the following statements about MUX VLANs are true?

- A. Principal VLAN can and MUX VLAN all within VLAN communication
- B. each Group VLAN must bind a Principal VLAN
- C. each Separate VLAN must bind a Principal VLAN
- D. Separate VLAN can and MUX VLAN all within VLAN communication


Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 12

As shown in the figure:

```
OSPF Process 1 with Router ID 10.0.12.1
Area: 0.0.0.0
Link State Database

Type      : Sum-Net
Ls id     : 10.0.23.0
Adv rtr   : 10.0.12.2
Ls age    : 61
Len       : 28
Options   : E
seq#      : 80000001
chksum    : 0x3ae8
Net mask  : 255.255.255.0
Tos 0 metric: 1
Priority  : Low
```



- A. The destination network described by this LSA is 10.0.23.0/24
- B. The type of the LSA is AS-external-1-LSA
- C. The LSA in the figure is generated by this router
- D. This device is ABR

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 13

After the VLAN-based MA, C address flapping detection function is configured, if the MA, C address flaps. The interface can be configured to perform actions according to requirements. Which of the following is NOT a configurable action?

- A. MA, C address blocking
- B. interface blocking
- C. Traffic filtering
- D. send alert

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 14

In the intra-domain MPLS VPN network, when the data packet enters the public network and is forwarded, it will be encapsulated with two layers of MPLS labels. Regarding the description of the two layers of labels, which of the following options is wrong?

- A. The outer label of MPLS VPNE is called the private network label, and the inner label is called the public network label.
- B. The outer label of MPLS VPN is allocated by the LDP protocol or statically, and the inner label is allocated by the MP-BGP neighbor at the correct end.
- C. By default, the outer label is singled out before the packet is forwarded to the last hop device
- D. The outer label is used to correctly send the data packet to the corresponding VPN on the PE device

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 15

Which of the following reasons may cause the hosts in the same VLAN of the LAN to fail to communicate? (Multiple choice)

- A. The interface is manually shut down or the physical interface is damaged
- B. Wrong port and MAC address binding is configured on the switch
- C. Port isolation is configured on the switch
- D. Switch MAC address learning error

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 16

When configuring the DHCP Relay function on the device, the VLAN ANIF interface of the relay connection client must be bound with a DHCP server group, and the IP address of the proxy DHCP server must be configured in the bound DHCP server group.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumps.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 17

ping -a X-c Y-s z -vpn-instance M 10.5.16.2, what is the meaning of this command? (Multiple choice)

- A. The source IP address of the ping packet is X
- B. The ping packet belongs to VPN instance M
- C. The ICMP request of the ping, the packet size is Z (excluding IP and ICMP header)
- D. The ping sends Y ICMP requests

Answer: A,B,C,D (LEAVE A REPLY)

NEW QUESTION: 18

According to this picture, what can we judge? (Multiple choice)

```
[R1]tracert -a 172.16.1.1 -q 10 172.16.1.4
tracert to 172.16.1.4(172.16.1.4), max hops: 30 ,packet length: 40,press CTRL-C to break
 1  10.1.13.2 40 ms 10 ms 10 ms 10 ms 10 ms 10.1.12.2 30 ms 20 ms 20 ms 20 ms 20 ms 30 ms 10.1.13.2 10 ms 10 ms
   20 ms 20 ms 20 ms 10.1.12.2 20 ms 20 ms 20 ms 20 ms
 2  10.1.24.2 40 ms 10.1.34.2 30 ms 20 ms 20 ms 20 ms 30 ms 30 ms 10.1.24.2 20 ms 20 ms 30 ms 20 ms 20 ms
   10.1.34.2 30 ms 20 ms 40 ms 30 ms 10.1.24.2 20 ms 20 ms 20 ms
```

- A. R1 access to 172.16.1.4 requires a 2-hop router
- B. R1 access to 172.16.1.4 requires a 4-hop router
- C. There are 2 equivalent paths for R1 to access 172.16.1.4
- D. There are 4 equivalent paths for R1 to access 172.16.1.4

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 19


Which of the following aspects should be considered in the cutover risk assessment? (Multiple choice)

- A. Scope of risk impact
- B. Time of risk impact
- C. Location of key risk points
- D. Loss caused by risk

Answer: A,B,C,D (LEAVE A REPLY)

NEW QUESTION: 20

As shown in the figure, there is a packet containing a three-layer label header. Please select the values (decimal) corresponding to the x, and Z fields in the figure.

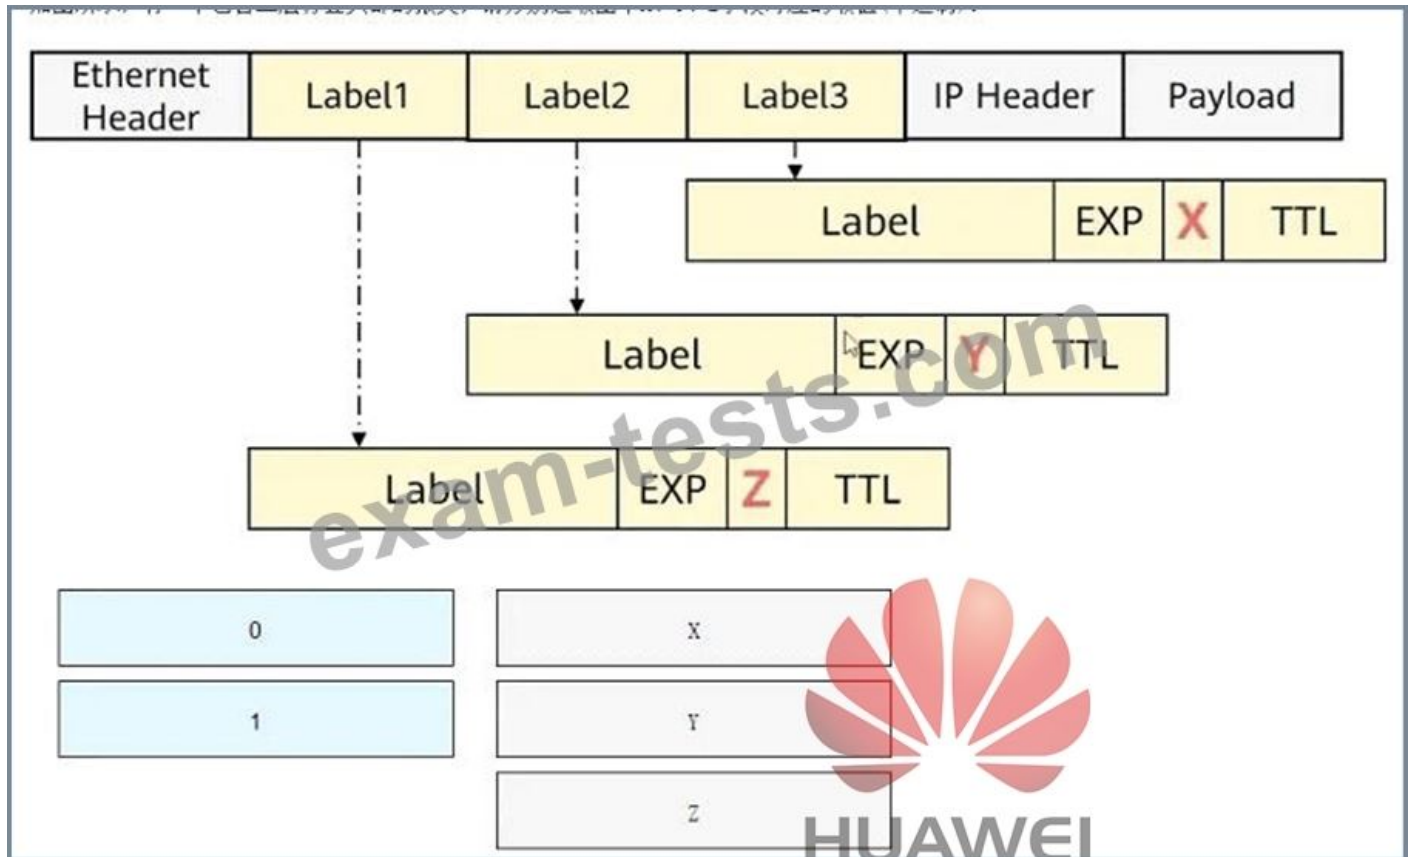

Answer:

YZX

NEW QUESTION: 21

After a fault occurs, you need to collect and back up various types of fault information in time as a reference for troubleshooting. In addition, when seeking emergency assistance from Huawei Technologies Co., Ltd.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 22

Which of the following statements about IPSG is false?

- A. IPSG can prevent IP address spoofing attack
- B. IPSG can be turned on IP packet inspection alarm function, linked with the network management to alarm
- C. able to pass IPSG prevent the host from changing private IP address
- D. IPSG is a source based on a three-layer interface IP address filtering technology

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 23

Network administrator A wants to use ACL to match specific routing entries. Which of the following routing entries will be matched by the ACL rules in the figure?

acl number 2000

rule 10 permit source 10.0.0.0 0.0.6.0

- A. 10.0.2.0/24
- B. 10.0.1.0/24:
- C. 10.0.0.1/32
- D. 10.0.0.0/24

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 24

A campus has deployed IPv6 for service testing. There are 4 routers in the network, running OSPFv3.

Interconnection of IPv6 networks. As shown in the figure, an engineer checked the LSDB of R2 and intercepted one of them Link-LSAs. Which of the following statements is true about the description of this LSA?



- A. produce the LSA The router is R2
- B. R2 interface GE0/0/0 IPv6 address prefix: 2001:2343:23::/64
- C. Should LSA show R2 External routing is not supported, but participating IPv6 route calculation
- D. R2 interface GE0/0/0 The link-local address force: FE80::2E0:FCFF:FEC, D:4F79

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 25

There is the concept of forwarding equivalent FEC in MPLS. Which of the following descriptions is wrong? (Multiple choice)

- A. The packets of the same FEC will be processed differently in the MPLS network
- B. The division of FEC is very flexible. It can be based on any combination of source address, address, source port, destination port, protocol type or VPN, etc.

- C. A forwarding equivalence FEC will be assigned a unique label value on all routers
- D. MPLS classifies packets with the same forwarding processing method into one category, which is called FEC

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 26

esighth uses different colors to distinguish different alarm levels, red represents emergency, orange represents important, and yellow represents The table is secondary, and blue represents the prompt. Which of the following statements about different alarm levels is correct: (multiple choice)

- A. Prompt: A potential or imminent business-impacting failure has been detectedD. but currently has little business impact
- B. Minor: There is currently a certain impact on the business, but corrective actions are required to prevent serious failure alarms
- C. Urgent: Alerts that have affected the business and require immediate corrective action
- D. Important: An alarm that has affected the business and will have serious consequences if not handled in time

Answer: A,B,C,D (LEAVE A REPLY)

NEW QUESTION: 27

An engineer uses two routers to test IPv6 services, and simulates the interconnection between the headquarters and branches by running BGP4+. The logical topology of the network is shown in the figure. Regarding the transmission of IPv6 routes between the two devices, which of the following is a statement wrong?



- A. If the MP_REA, CH_NLRI attribute is carried in the Update packet, it indicates that the advertisement is a reachable route
- B. BGP4+ transmits routing information between peers through Update packets
- C. The Next_Hop attribute must be an IPv6 global unicast address when routing
- D. When the route is transmitted, it will carry recognized mandatory attributes such as AS_Path

Answer: C (LEAVE A REPLY)

NEW QUESTION: 28

From this picture, we can judge
 <Redisplay ipv6 routing table protocolTuozen

Public Routing Table . ISIS

Summary Count 6

ISIS Routing Table's Status : < Active >

Summary Count 6

Destination:3000:FDEA::4	Prefix Length : 128
NextHop : FE80::2E0:FCFF:FE98:2577	Preference : 15
Cost :20	Protocol : ISIS-L2
Interface Giga bitEthernet0/0/1	Flags



- A. R1ofGigabitEthernet0D/1must be enabledISIS-IPv6
- B. R1have6stripISISofIPv6routing
- C. R1The type of device is definitely notLevel-1
- D. R1noISISofIPv6routing

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 29

In the DU label distribution mode, if the Liberal retention mode is adopted, the device will retain the labels distributed by all LDP peers, regardless of whether the LDP peer is the optimal next hop to the destination network segment.

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 30

Network administrator A wants to use ACL to match specific routing entries. Which of the following routing entries will be matched by the ACL rules in the figure? (Multiple choice) acl number 2000 rule 10 permit source 10.0.0.0 0.0.6.0

- A. 10.0.1.0/24 :
- B. 10.0.2.0/24
- C. 10.0.0.1/32
- D. 10.0.0.0/24

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 31

MPLS has the concept of FEC-Forwarding Equivalence Class, so on which of the following standards cannot FEC be allocated based?

- A. Fragment of offset
- B. Application Protocol
- C. Class of Service
- D. Destination Address

Answer: ([SHOW ANSWER](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumpsPASS.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 32

Regarding the BGPI MPLS IPVPN network architecture, which of the following descriptions is wrong?

- A. Sites can visit each other through VPN, and a site can only belong to 1 VPN
- B. Under normal circumstances, CE equipment does not perceive the existence of VPN, and CE equipment does not need to support MPLS, MP-BGP, etc.
- C. The P device only needs to have basic MPLS forwarding capabilities and does not maintain VPN related information
- D. The BGP/MPLS IP VPN network architecture consists of three parts: CE (Customer Edge), PE (ProviderEdge), and P (Provider). PE and P are operator equipment, and CE is BGP/MPLS IPVPN user equipment.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 33

EGP authentication can prevent illegal routers from establishing neighbors with BCP routers. BCP authentication can be divided into MD5 authentication and Keychain authentication. Which of the following BGP messages will carry BCGP Keychain authentication information? ((Multiple choice)

- A. Update
- B. Open
- C. Notication
- D. Keepalive

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 34

(Drag and drop) Network administrator A needs to permit or deny some specific routes, but administrator A is not proficient in configuration. Please help administrator A to sort the configuration reasonably so that the device can permit or deny specific routes according to the requirements in the figure.

Route	Permit/Deny
10.0.0.0/8	Deny
10.0.0.0/16	Permit
10.0.1.0/24	Permit
10.0.0.0/24	Deny
10.0.0.128/30	Deny
10.0.0.1/32	Permit

ip ip-prefix TEST derry 10.0.0.0 8 Less-equal 32	
ip ip-prefix TEST derry 10.0.0.0 24 less-equal 32	
ip ip-prefix TEST permit 10.0.0.0 16 less-equal 32	
ip ip-prefix TEST permit 10.0.0.0 30 less-equal 32	

Answer:

ip ip-prefix TEST derry 10.0.0.0 8 Less-equal 32	ip ip-prefix TEST permit 10.0.0.0 30 less-equal 32
ip ip-prefix TEST derry 10.0.0.0 24 less-equal 32	ip ip-prefix TEST derry 10.0.0.0 24 less-equal 32
ip ip-prefix TEST permit 10.0.0.0 16 less-equal 32	ip ip-prefix TEST permit 10.0.0.0 16 less-equal 32
ip ip-prefix TEST permit 10.0.0.0 30 less-equal 32	ip ip-prefix TEST derry 10.0.0.0 8 Less-equal 32

NEW QUESTION: 35

Network administrator A wants to use the AS-Path Fiter to match the routing entries of the BGP routing attribute AS_PATH [100 200 300]. Network administrator A sorts out the four configurations in the figure. Which of the following configurations can satisfy network administrator A's requirements? Require?

	ip as-path-filter TEST permit 100 200 300	
	ip as-path-filter TEST permit 300\$	
C	ip as-path-filter TEST permit A[A100]	
D	ip as-path-filter TEST permit *	1
HUAWEI	one	

- A. WayA
- B. EC
- C. *D
- D. WayB

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 36

Which of the following information can the DHCP binding table contain? (Multiple choice)

- A. MAC address
- B. Lease time
- C. IP address
- D. Port and UDP port

Answer: A,B,C (LEAVE A REPLY)

NEW QUESTION: 37

In the process of viewing the debug output through the SSH terminal, a lot of information pops up. Which of the following operations can Make the Monitor terminal no longer pop up debug messages?

- A. Open Notepad\$SLIAundo terminal monitor,Copy the command line and paste it intoMonitorinterface
- B. exit currentMonitorinterface redesignSSHLog in to the device to open a new oneMonitorinterface
- C. open notepad inputundo terminal debugging,Copy the command line and paste it intoMonitorinterface
- D. Open Notepad and enterundo debugging a 11,Copy the command line and paste it intoMonitorinterface

Answer: A,C,D (LEAVE A REPLY)

NEW QUESTION: 38

What check items can be set by IPSG?

- A. MA, Caddress

- B. VLANID
- C. IPaddress
- D. Outgoing interface

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 39


Which of the following are advantages of VLAN aggregation?

- A. accomplishSub-VLANIsolation between broadcast domains
- B. decreasedIPwaste of address
- C. Increased addressing flexibility
- D. added availableM LANquantity

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 40

According to this picture, we can judge that R4 is on?

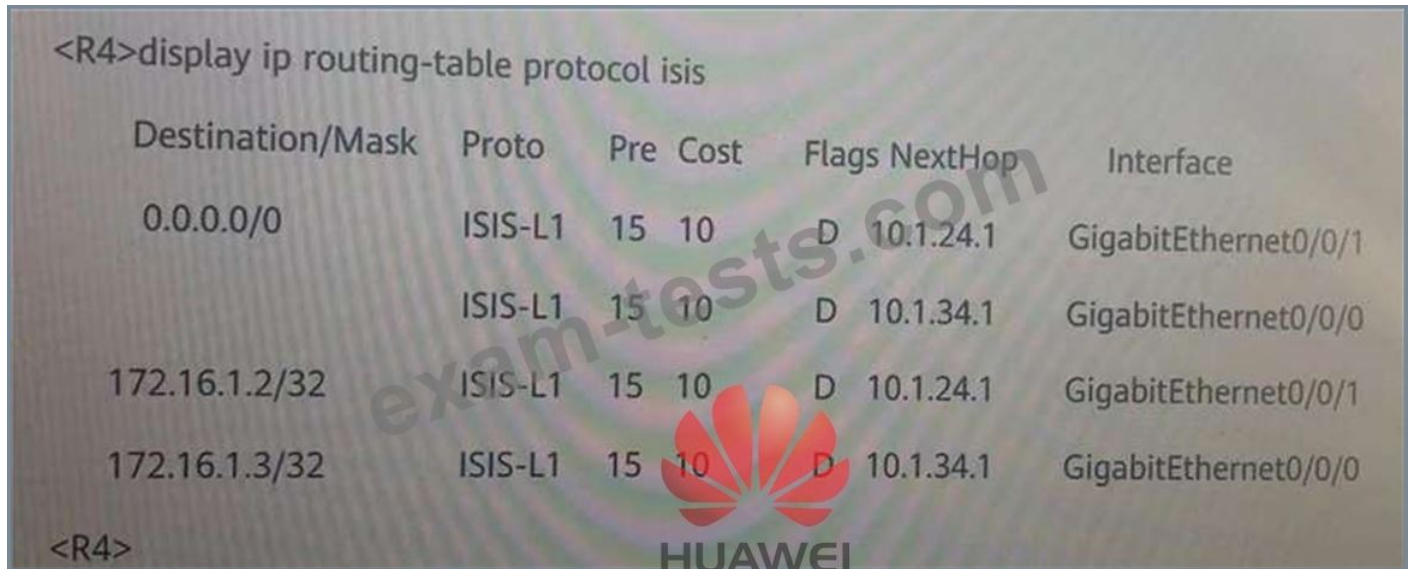

- A. 2 default routes with different costs
- B. 1 default route
- C. 4 equivalent default routes
- D. 2 equal-cost default routes

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 41

An enterprise purchased the leased lines of two operators. In order to optimize the route, the enterprise used the 6GP protocol to learn routing entries of the two operators. However, the company found that after such a configuration, the traffic of the export routing increased greatly. After the network engineering investigation, it was found that the traffic of the two operators was passed to each other through the company's export router.



```

bgp 300
peer 10.1.1.1 as-number 1000
peer 10.1.1.1 as-path-filter AS1000 export
peer 20.1.1.1 as-number 2000
peer 20.1.1.1 as-path-filter AS2000 export
ip as-path-filter AS1000 deny _2000_
ip as-path-filter AS1000 permit *
ip as-path-filter AS2000 deny _1000_
ip as-path-filter AS2000 permit *
  
```

Therefore, the company intends to use routing strategies to prevent the traffic between different operators from passing each other. Is the configuration in the figure correct?

- A. FALSE
- B. TRUE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 42

As shown in the figure, all routers run OSPF, because R3 is in the backbone area, so in the LSDB of R3 There are no three types of LSAO




- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 43

As shown in the figure, all interfaces of the router enable OSPF, and the configurations of R1, R2, and R3 are as shown in the figure, then () will generate a Type 3 LSA with a linkState ID other than 0.0.0.0. (Please fill in the device name, such as R1)

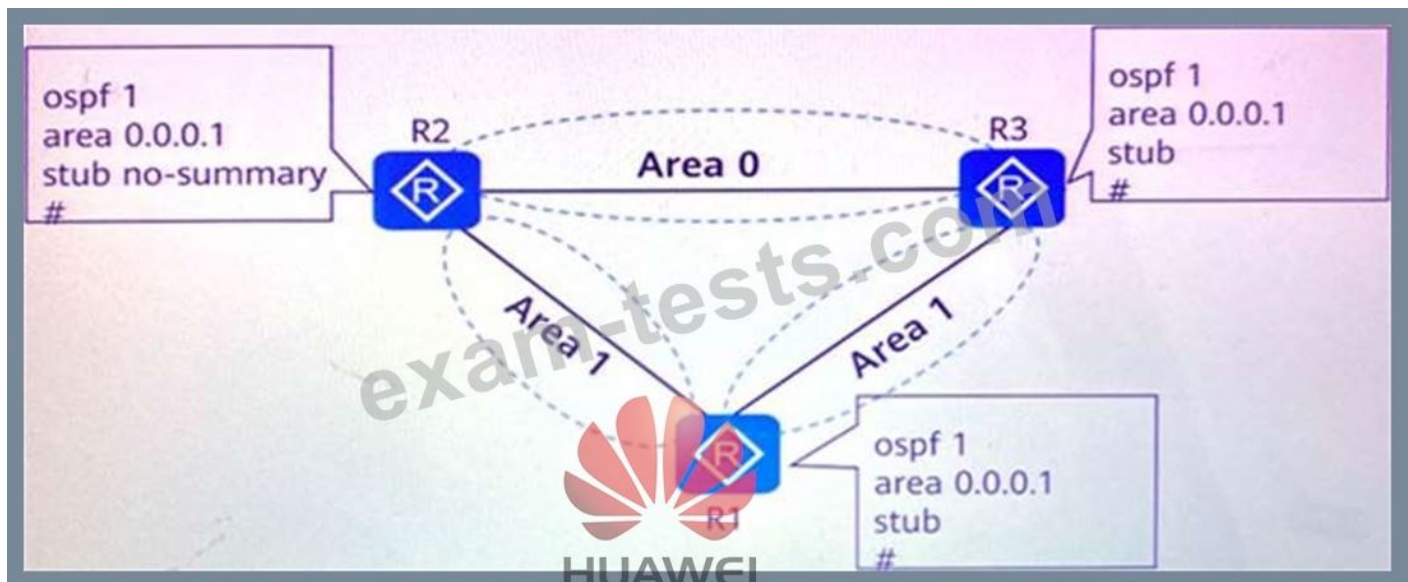

Answer:

R3

NEW QUESTION: 44


In addition to the virtual link, what type of IPv6 address is the source IPv6 address of the He11o packet of OSPFv3?

- A. Global unicast address
- B. Unique local address
- C. Link local address
- D. IPv6 anycast address

Answer: C (LEAVE A REPLY)

NEW QUESTION: 45

As shown in the figure, Site1 and Site2 need to achieve mutual access through the operator's BGP/MPLS IPVPN. It is known that the public network tunnel between PE1 and PE2 has been established (the label information is shown in the figure), and PF1 has advertised the 192.168.1.0/24 network segment route in Site1 to PE2 through the MP.JIBGP neighbor relationship, and the route learning is normal.

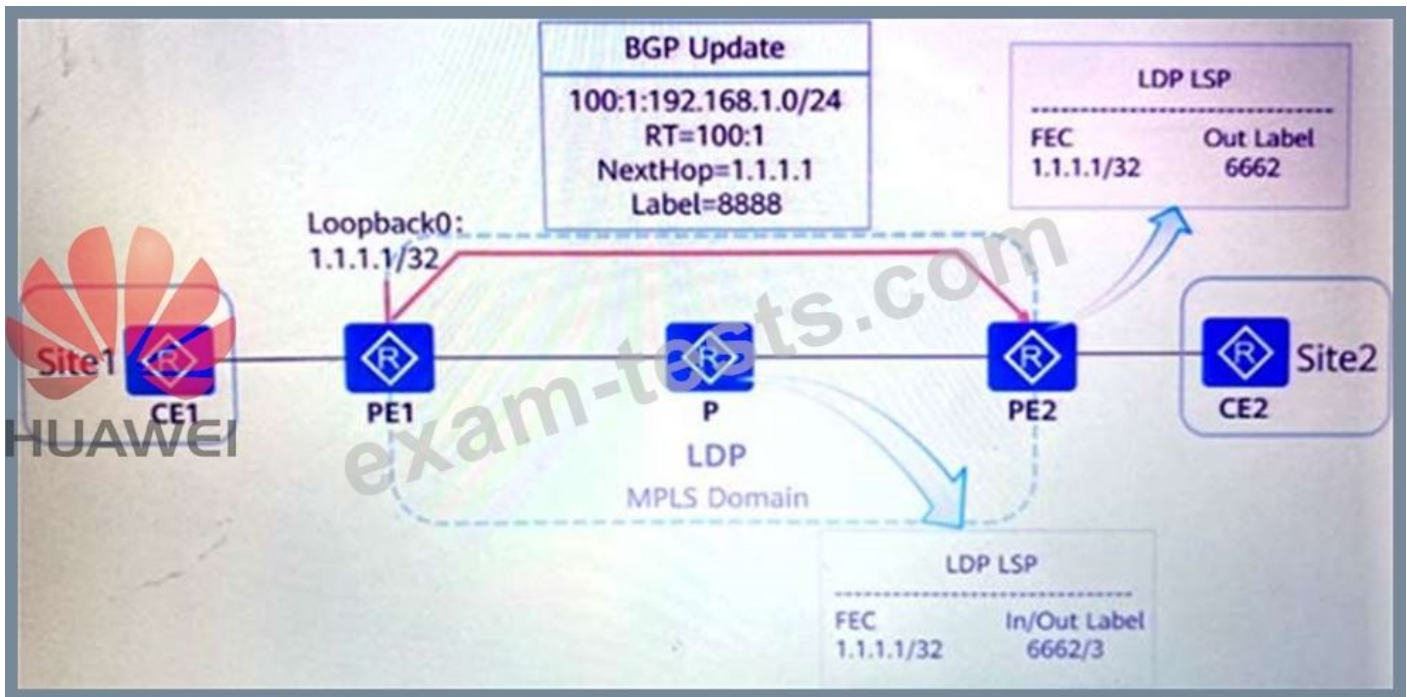


When capturing the data that Site2 visits the 192.168.1.0/24 of Site1 between P and PE1, what should be the outermost label?

- A. 3
- B. 6662
- C. 8888
- D. 6661

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 46

As shown in the figure, network administrator A on the R1 router, after modifying the MED value of the routing entry sent to R2 through the routing policy, can control the path of traffic entering AS100.

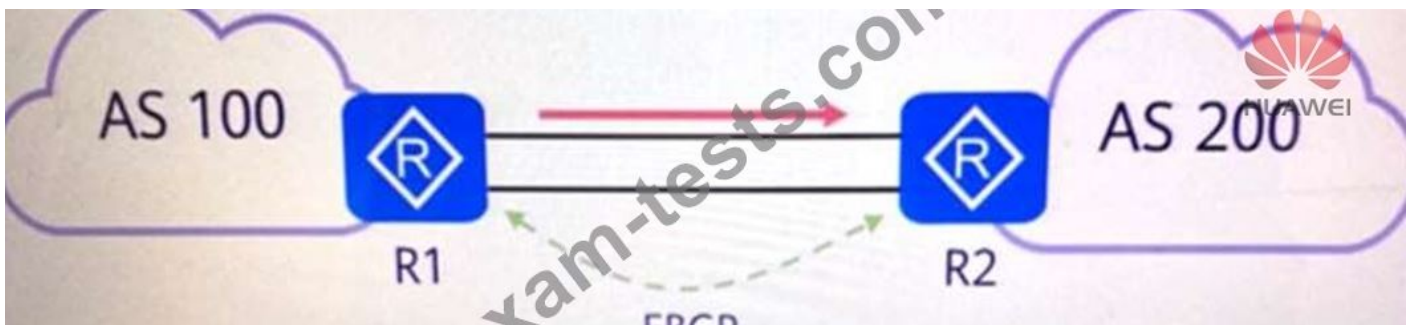

- A. FALSE
- B. TRUE

Answer: B ([LEAVE A REPLY](#))

exam dumps, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:
https://www.braindumps.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html
(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 47

A campus deploys both IPv4 and IPv6 networks for service testing, and runs IS-IS to realize network interconnection. The IS-IS routing protocol has good scalability and is widely used in the existing network. Which of the following statements is true about IS-IS scalability?

- A. N LPIDYesIS-IS to support IPv6 and added TLV
- B. IS-IS to support PV6 to add TLV carry Pv6 Address information
- C. for IS-IS in terms of adding new features, only adding new TLV Just
- D. IS-IS use TLV structure builds the message so that IS-IS More flexibility, flexibility and scalability

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 48

As shown in the figure:



- A. IS-LEVEL 1 of R3 and R1 do not match
- B. R3 and R1 have different area codes
- C. The System ID of R3 and R1 are duplicated
- D. The IIH certification of R3 and R1 failed

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 49

Regarding the description of the encapsulation format of labels in MPLS, the correct one is

- A. MPLS The total length of a single label is 4 bytes (32 bits)
- B. For Ethernet, PPP packet, the tag stack is like 'shim*' - between the L2 header and the data: yes VLAN tag Time, MPLS head on the ether head with VLAN tag between
- C. in the label TTL fields and IP grouped TTL (Time To Live, time-to-live) is similar in meaning and also has the effect of preventing loops
- D. in the label S field: 1 bit, Used to identify whether the label is the bottom label of the stack, the value is 1 is indicated as the penultimate layer label

Answer: A,C (LEAVE A REPLY)

NEW QUESTION: 50

The RR rules for advertising routes break the IBGP split horizon rules, so it may cause loops in the AS.


What routing attributes does RR use to prevent loops? (Multiple choice)

- A. Originator ID
- B. Cluster List
- C. Next hop
- D. AS-PATH

Answer: A,B (LEAVE A REPLY)

NEW QUESTION: 51

According to this picture, what can we judge? (Multiple choice)

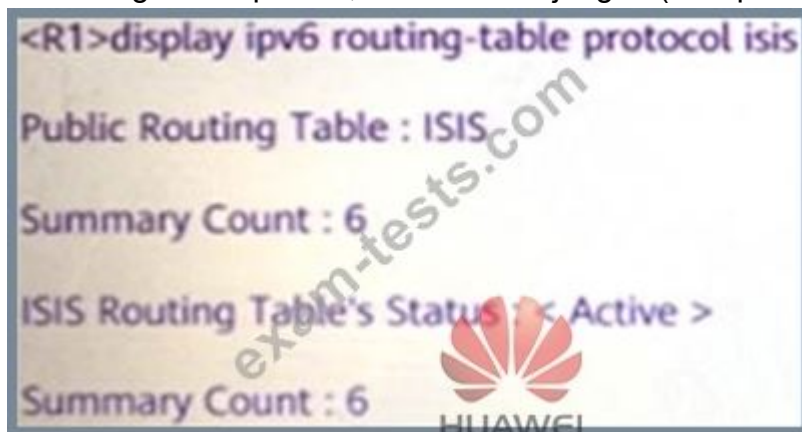



```
Destination : 3000:FDEA::4
              HUAWEI
PrefixLength : 128
NextHop      : FE80::2E0:FCFF:FE98:2577
Preference  : 15
Cost        : 20
Protocol    : ISIS-L2
Interface   : GigabitEthernet0/0/1
Flags      : D
```

- A. R1 has 6 IS-IS IPv6 routes
- B. IS-IS IPv6 must be enabled on GigabitEthernet0D/1 of R1
- C. R1 does not have IS-IS IPv6 routing
- D. The device type of R1 is definitely not Leve1-1

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 52

What is the purpose of configuring LSP fragmentation for IS-IS equipment?

- A. No practical purpose
- B. Make the device unable to learn IS-IS routing information
- C. Make the device unable to establish IS-IS neighbors
- D. Allow the device to support more IS-IS routing entries

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 53

The link status information between different S.4S processes of the routers around the Taiwan and Taiwan is considered to be sound insulation.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 54

Which of the following reasons may cause the hosts in the same VLAN of the LAN to fail to communicate with each other?

- A. Port isolation is configured on the switch
- B. The wrong port is configured on the switch andMA, Caddress binding
- C. interface is artificialshutdownor the physical interface is damaged
- D. switchMA, Caddress learning errors

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 55

EGP authentication can prevent illegal routers from establishing neighbors with BCP routers. BCP authentication can be divided into MD5 authentication and Keychain authentication. Which of the following BGP messages will carry BCGP Keychain authentication information? ((Multiple choice)

- A. Update
- B. Notification
- C. Keepalive
- D. Open

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 56

When troubleshooting the EBGP neighbor relationship, you found that two directly connected devices use Loopback ports to establish a connection, so execute display current-configuration configuration bgp to view the configuration of peer ebgp-max-hop hop-count. Which of the following statements is correct?

- A. hop-count must be greater than 2
- B. hop-count must be greater than 1
- C. hop-count must be greater than 255
- D. hop-count must be greater than 15

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 57

Which of the following is included in the routine collection of basic equipment information?

- A. Whether the configuration is saved
- B. License information
- C. Patch information
- D. The software version the device is running

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 58

In OSPF, the A, BR will convert all type 7 L SAs in the NSSA area to type 5 L SAs.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 59

Which description is correct about the label encapsulation format in MPLS? (Multiple choice)

- A. The TTL field in the label is similar to the TTL (Time To Live.) in the IP packet, and it also has the effect of preventing loops.
- B. For Ethernet and PPP packets, the label stack is located between the layer 2 header and the data like a "underlay*": when there is a VLAN tag, the MPLS header is placed between the Ethernet header and the VLAN tag

- C. The S field in the label: 1 bit, used to identify whether the label is the bottom label of the stack, when the value is 1, it indicates the second-to-last label
- D. The total length of a single MPLS label is 4 bytes (32 bits)

Answer: A,D (LEAVE A REPLY)

NEW QUESTION: 60

Please sort by the cutover execution steps.

- A. After the cutover is completed, observe the status of the network on the new device
- B. Cut over business from old equipment to new equipment
- C. Perform business inspections on new equipment
- D. Install new equipment and configure
- E. After ensuring the normal business operation of the new equipment, the old equipment goes offline

Answer: A,B,C,D,E (LEAVE A REPLY)

NEW QUESTION: 61

In the MPLS network, there are different operation types for labels, among which the meaning of the "pop" action is:

- A. existMPLSAdd the top label to the label stack
- B. Replace the top label with another value
- C. Replace the top label with another set of labels
- D. existMPLSRemove the top label from the label stack

Answer: D (LEAVE A REPLY)

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumpsPASS.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 62

In what ways can log information be viewed:

- A. there is no way
- B. log in to the device via display logbuffer check
- C. Network management system interface view
- D. Willflash:/logfile/Tlog file via FIP/TFTP transfer to PC superior

Answer: B,C,D (LEAVE A REPLY)

NEW QUESTION: 63

There is the concept of forwarding equivalence class FEC in MPLS. The following description is wrong:


- A. MPLS Grouping packets with the same forwarding processing method is called FEC
- B. a forwarding equivalence class FEC A unique label value is assigned on all routers
- C. same FEC grouped in MPLS There will be different processing in the network
- D. FEC The division is very flexible. Can be the source address, and the address, source port, destination port, protocol type or

Answer: B,C (LEAVE A REPLY)

VPNEqual to any combination of division basis

NEW QUESTION: 64

The configuration shown is performed on R2 to filter all incoming routes. Suppose there is a BGP route with the AS_Path attribute of [100 200 300 400] on R1 that needs to be sent to R2. Please help the network administrator to adjust the AS order in the AS_Path attribute of the route on R1 to ensure that the route entry will not be filtered by the routing policy of R2 _____, _____, _____, _____.

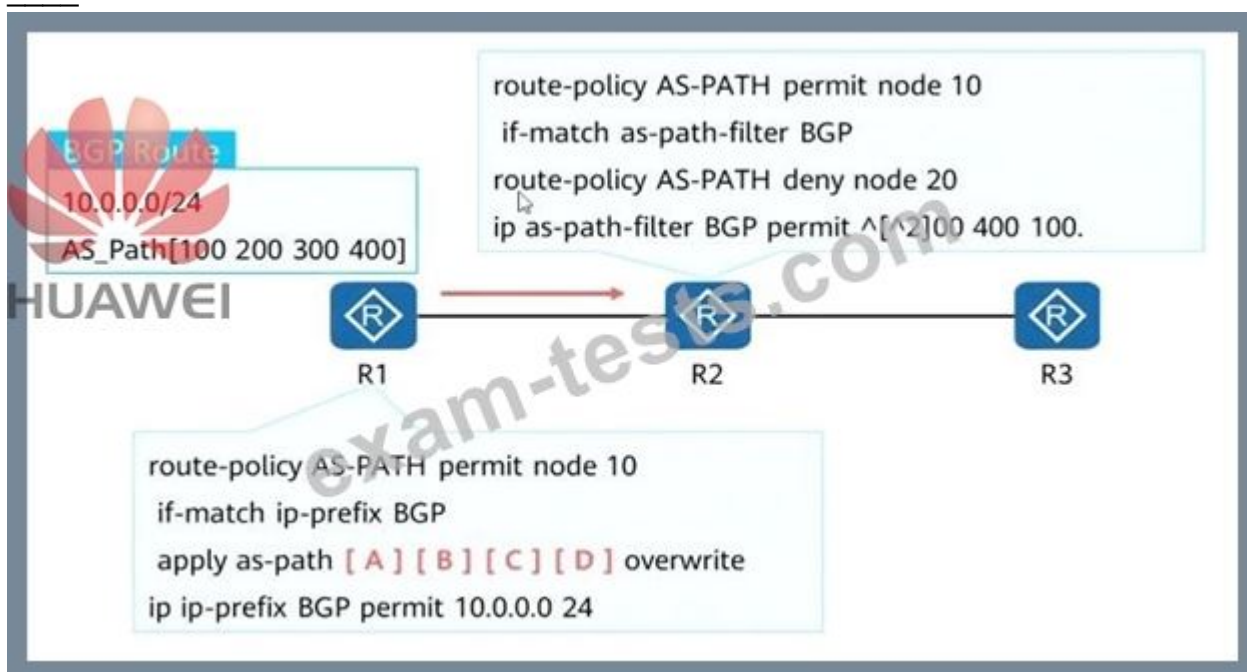

- A. 400 This space corresponds to the [D] space in the routing policy
- B. 200 This space corresponds to the [B] space in the routing policy
- C. 100 This space corresponds to the [A] space in the routing policy
- D. 300 This space corresponds to the [C] space in the routing policy

Answer: (SHOW ANSWER)

NEW QUESTION: 65

Which of the following regular expressions can match only BGP routes that pass through AS200 and then through AS300 eyes?

- A. A200|A300
- B. _(200 300)_
- C. 200\$|300\$
- D. _[200 300]

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 66

In the finishing work of the structured network troubleshooting process, which of the following are the documents that need to be handed over? (Multiple choice)

- A. Troubleshooting process documentation
- B. Troubleshooting summary report
- C. Maintenance suggestions to avoid the failure

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 67

IEIF has extended the functions of OSPF by taking advantage of the strong scalability of OSPF. To enable it to support IPv6 networks, the expanded protocol is called OSPFv3, and OSPFv3 is compatible with OSPFv2.

- A. TRUE
- B. FALSE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 68

Regarding the description of the label encapsulation format in MPLS, which one is correct? (Multiple choice)

- A. The total length of a single MPLS label is 4 bytes (32 bits)
- B. The S field in the label: 1 bit, used to identify whether the label is a label at the bottom of the stack, when the value is 1, it is the penultimate layer label
- C. The TTL field in the label is similar to the TTL (Time To Live) in the IP packet, and it also has the effect of preventing loops.
- D. For Ethernet and PPP packets, the label stack is located between the layer 2 header and the data like the "underlay*": when there is a VLAN tag, the MPLS header is placed between the Ethernet header and the VLAN tag

Answer: (SHOW ANSWER)

NEW QUESTION: 69

In an MPLS network, functions such as neighbor discovery, session establishment and maintenance, and label management are implemented by exchanging LDP messages between SRs running the DP protocol. To ensure the reliability of message delivery, all LDP messages are sent and received based on TCP connections.

- A. True

B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 70

There is a concept of forwarding equivalence class (FEC-Forwarding Equivalence Class) in MPLS, so FEC does not Can the allocation be made based on which of the following criteria?

- A. Service type(Class of Service)
- B. Application protocol(Application Protocol)
- C. sFragment offset (Fragment office)
- D. target address(Destination Address)

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 71

What is the meaning of ipv6 enable topology ipv6 in IS-IS protocol view?

- A. SPFCalculated atIPv4,IPv6in the topology of the
- B. not supportIPv6ofSPFcalculate
- C. has no meaning
- D. IPv4,IPv6use the same topologySPFcalculate

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 72

The correct description for the configuration on this switch is:

```
[Huawei]dhcp enable
```

```
[Huawei]interface Vlanif 100 [Huawei-Vlanif 100]dhcp select relay
```

```
[Huawei]dhcp enable
[Huawei]interface Vlanif 100 [Huawei-Vlanif 100]dhcp select relay
```

- A. YoujizhiDHCPYuegen server and mouthDHCP relayByKmust be enabled globallyDHCP
- B. forVLAN100interface designationDHCPThe server group isdhcpgroup1
- C. VANIF100The interface will receive theDHCPmessage, sent to the outside through the relayDHCP Server
- D. First you need to createDHCPmonth starter group and add to server groupDHCPserver

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 73

Senior engineers with rich experience can quickly solve faults only by experience, with high efficiency.

- A. False
- B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 74

Network administrator A wants to use the IP Prefix List to match a specific route entry. Which of the following routes will Matched by the IIP Prefix List in the figure?

- A. 10.0.1.0/24
- B. 10.0.0.0/24
- C. 10.0.2.0/24
- D. 10.0.0.1/30

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 75

If the sticky MA, C function is enabled on an interface, by default, the number of MA, C addresses learned by the interface is as large as few?

- A. 10
- B. 15
- C. 5
- D. 1

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 76

By default, the Domain ID of each OSPF process running on the router is the same as the process number of the process, which can be modified by the domain-id command under the process

- A. TRUE
- B. FALSE

Answer: B ([LEAVE A REPLY](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumpspass.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 77

To prevent hackers from attacking user devices or networks through MA, C addresses, you can configure the MA, C addresses of untrusted users as black hole MA, C addresses to filter out illegal MA, C addresses.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 78

Match the alarm severity to the severity of the fault and countermeasures

Critical	There are potential females. Longevity is required for daily optimization
Major	Have vision for strong affairs
Critical-1, Major-2, Minor-2, Warning-4	Foot flank quality work common time track hoe1
Critical-4, Major-2, Minor-1, Warning-3	The rope section service is available for fear that it must be dealt with immediately

- A. Critical-3, Major-2, Minor-1, Warning-4
- B. Critical", Major-2, Minor-3, Warning-4 A

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 79

What is the meaning of the display current-configuration I include vlan command?

- A. View the IP address of the VLANIF interface
- B. View all configurations that contain the "VLAN" keyword
- C. View the physical interface information bound to each VLAN
- D. Check which VLANs are currently created

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 80

Regarding BGP/MPLS IPVPN routing interaction, which of the following description is wrong?

- A. After the egress PE receives the VPNv4 route advertised by the ingress PE, it filters the VPNv4 route according to the RT attribute carried by the route
- B. The ingress PE will convert the IPv4 route received from the CE into a VPNv4 route, and save it according to different VPN instances
- C. The exchange between PE and CE is IPv4 routing information
- D. The egress PE can send IPv4 routes to the remote CE through BGP, IGP or static routing

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 81

Run the display ip interface GEO/D/D command to view statistics about ping packets received on the interface.

- A. True
- B. False

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 82

In the test phase of cutover, which standards that can indicate the test has been completed?

- A. The configuration check result of the IP device is normal as the standard
- B. Check that the network is running normally as a standard
- C. Test network business as normal as the standard
- D. The upper-layer application service test carried by the network is normal as the standard

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 83

After the cutover is completed, which items generally need to be checked? (Multiple choice)

- A. Physical topology
- B. Control plane entries
- C. Software version
- D. Data flow

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 84

The default MPLS label publishing mode, label distribution control mode and label retention mode of Huawei routers are respectively

Yes			
How to publish tags	1	downstream from g	
		free way	
	"	1	1

- A.** Label release method-independent methodD. label distribution control method-free methodD. label retention method-downstream autonomy
- B.** Label release method - downstream autonomous methodD. label distribution control method - independent methodD. label retention method - free method
- C.** Label release method - downstream autonomous methodD. label distribution control method - free methodD. label retention method - independent
- D.** Label release method - free methodD. label distribution control method - independent methodD. label retention method - downstream autonomous method

Answer: B (LEAVE A REPLY)

NEW QUESTION: 85

Which of the following features affects BGP neighbor establishment?

- A.** ebgp max hop
- B.** BGP GSTM
- C.** BGProute filtering
- D.** BGPCertification

Answer: A,B,D (LEAVE A REPLY)

NEW QUESTION: 86

Does the role of Link-LSA in OSPFv3 not include?

- A.** Advertise the link-local address of this interface to other routers on the link
- B.** Advertise to other routers on the link the originatingNetwork-LSAOptions set in
- C.** To the other road on the link Tiandikou noon-
- D.** Advertise this router's interface to other routers on the linkID

Answer: (SHOW ANSWER)

NEW QUESTION: 87

A router is running OSPF, and the output information is as shown in the figure. Which of the following statements is correct?

```
<Huawei>display ospf lsdb summary
OSPF Process 1 with Router ID 10.0.12.1
Area: 0.0.0.0
Link State Database

Type      : Sum-Net
Ls id     : 10.0.23.0
Adv rtr   : 10.0.12.2
Ls age    : 61
Len       : 28
Options   : E
seq#      : 80000001
chksum    : 0x3ae8
Net mask  : 255.255.255.0
Tos 0 metric: 1
Priority  : Low
```

- A. The LSA in the figure is generated by this router
- B. The destination network described by this LSA is 10.0.23.0/24
- C. This device is ABR
- D. The type of the LSA is AS-external1-LSA

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 88

Regarding the role of ping and tracert, which of the following statements is correct?

- A. Ping verifies the reachability from the local end to the opposite end, it does not mean that the opposite end is reachable from the local end
- B. Tracert must be able to trace every hop IP address from source to destination
- C. Tracert has the same function as ping, but the name is different
- D. Ping detects the two-way reachability between the correct end and the one-way icmp echo request packet

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 89

Configuring DHCP Snooping can be used to prevent imitator attacks, so the configuration process needs to include the following What are the steps?

- A. enable globalDHCP SnoopingFunction
- B. enable globalDHCPFunction
- C. Configure Interface Trust Status
- D. enable interface orVLANofDHCP SnoopingFunction

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 90

Which of the following is not part of the preparatory work for the cutover plan?

- A. risk assessment
- B. Root description of the current network
- C. field defense
- D. Cutover target

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 91

BGP routing strategy can control the distribution and reception of routes.

- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

NEW QUESTION: 92

Which of the following descriptions is correct about configuring static LSP in MPLS network?
(Multiple choice)

- A. When an LSR is an Ingress LSR, only Out Label needs to be configured, ranging from 16 to 1048575
- B. When a certain LSR is a Transit LSR, In Label and Out label need to be configured at the same time, the range of In Label is 16~1023, and the range of Out Label is 16~1048575
- C. When a certain LSR is an Egress LSR, only In Label needs to be configured, the range is 16~1023
- D. When a certain LSR is a Transit LSR, In Label and Out Label need to be configured at the same time, the range is 16~1023

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 93

Deployment in a small and medium-sized network OSPF, When viewing the routing table of a device, it is found that there are only directly connected routes.
It is not possible for the operation to cause the fault?

- A. Routing protocol configuration error
- B. Port address assignment problem
- C. Incorrect routing policy configuration
- D. The configured user permissions are too low

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 94

The engineer used two routers to test the IPv6 service and simulated the interconnection between the headquarters and the branch by running BGP4+. As shown in the figure, an engineer captured the packet to check the Update message sent by R1. Regarding the description of the message information, which of the following statements are correct? (Multiple choice)



- A. The next hop address of the route described in this message is: 2001:db8:2345:1::1\
- B. The length of the top and top strength of the routing address described in the message is: 2001:db8:2345:1::1/128

C. The message describes only one BGP attribute, and the multi-protocol unreachable NLRI attribute

D. This message describes the currently revoked IPv6 route

Answer: B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 95

In the VLAN aggregation technology, multiple Sub-VLANs are used to isolate the wide recruitment area, and these Sub-VLANs are aggregated into a logical Super-VLAN. A company divides different departments into different Sub-VLANs because of the Sub-VLAN. VLAN not only includes physical connections, but also can establish a three-layer VLANIF interface, which can directly communicate with the external network on the three-layer.


A. TRUE

B. FALSE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 96

As shown in the figure:

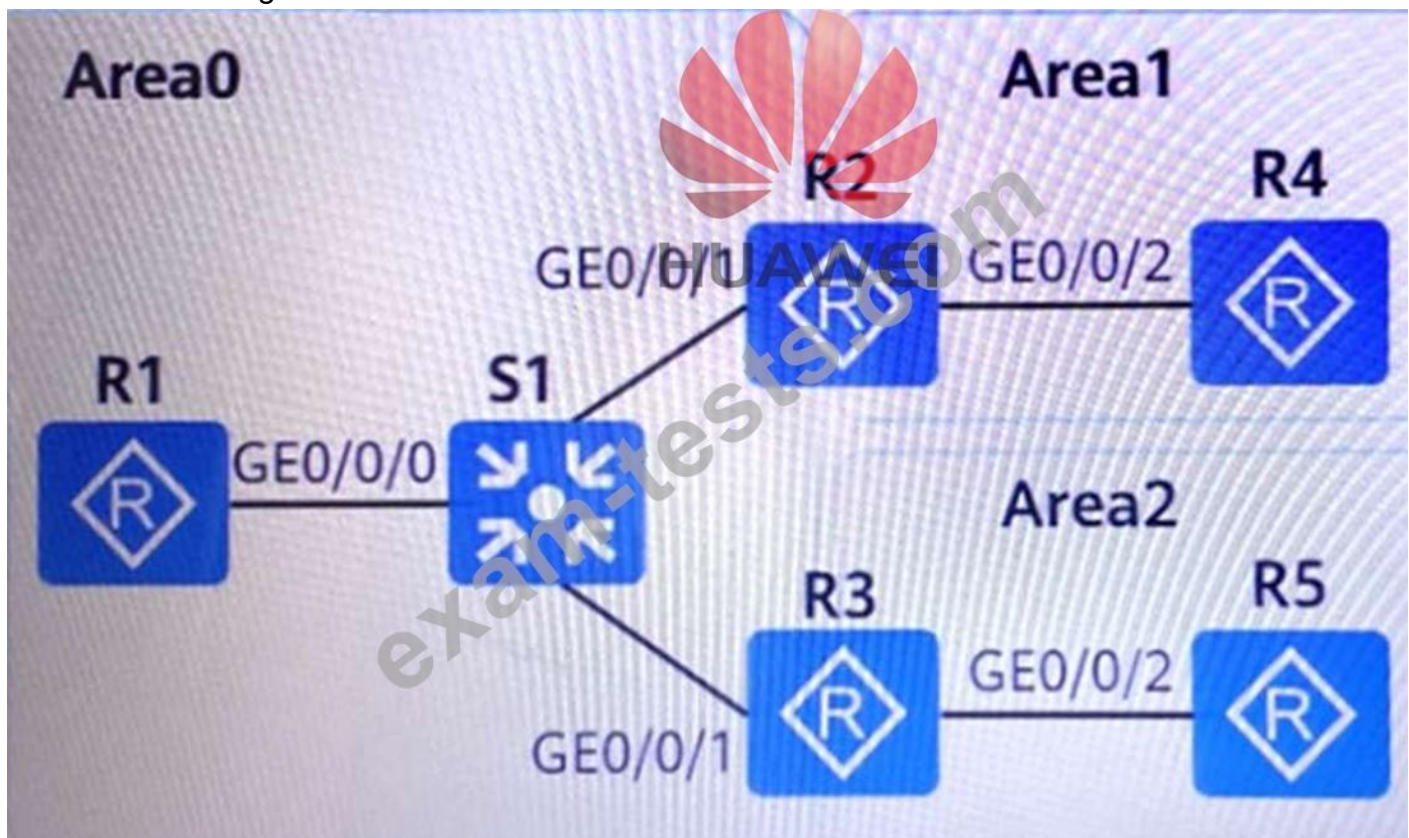

```

[R2] acl 2000
[R2-acl-basic-2000] rule deny
[R2-acl-basic-2000] quit
#
[R2] ospf
[R2-ospf-1] area 1
[R2-ospf-1-area-0.0.0.1] filter 2000 import
[R2-ospf-1-area-0.0.0.1] quit
[R2-ospf-1] default-route-advertise always


```

- A. There is no Type 3 LSA flooding in Area2
- B. There is no Type3 LSA flooding in Area1
- C. There is Type 5 LSA flooding in Area1
- D. There is Type 5 LSA flooding in Area2

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 97

As shown in the figure, Site1 and Site2 need to achieve mutual access through the operator's BGP/MPLS IPVPN. A known The public network tunnel between PE1 and PE2 has been established (the label information is shown in the figure), and PE1 has The 192.168.1.0/24 network segment route is advertised to PE2 through the MP.BGP neighbor relationship, and the route learning is normal. When grabbing between P and PE1, when Site2 accesses the 192.168.1.0/24 data of Site1, the outermost label What should the sign be?

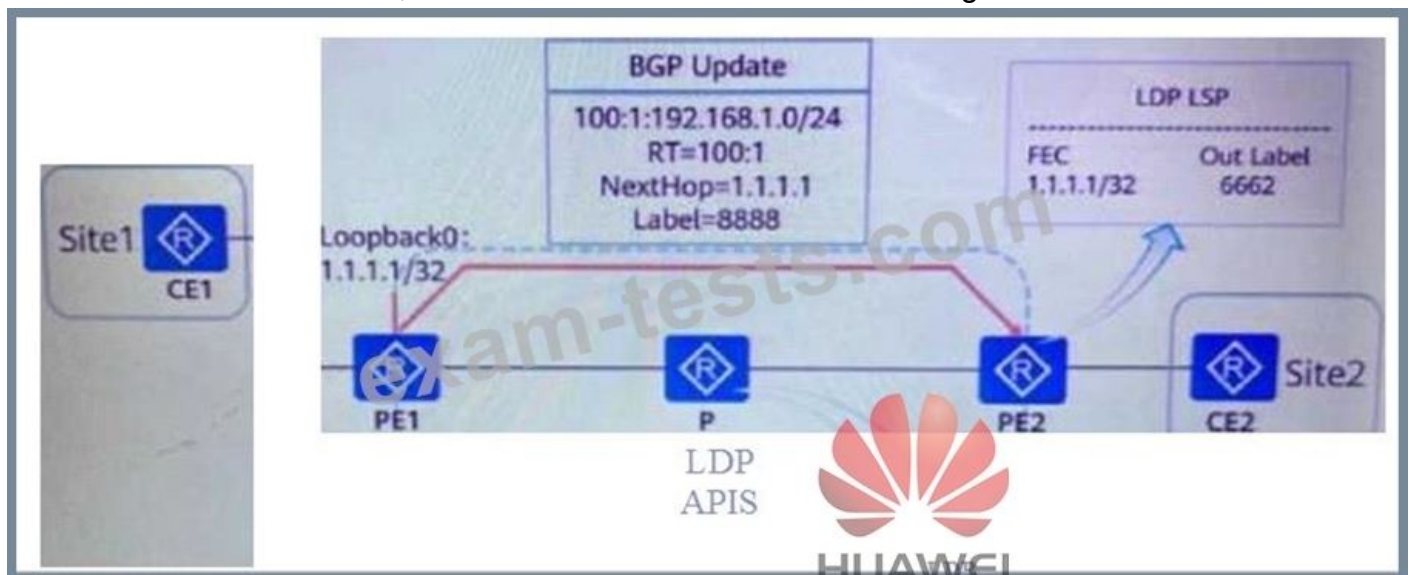

FEC In/Out label
1.1.1.1/32 6662/3

- A.
- B. 6662
- C. 8888
- D. 6661

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 98

If display current-configuration can reach the setting of !ISIS-IS, and display saved- There is no IS-IS setting in the configuration, so that means?

- A. memory is running IS-IS configuration, not saved to Flash
- B. nothing entered IS-IS The command
- C. Flash Running IS-IS configuration, not saved to memory
- D. memory is running IS-IS Configuration saved to Flash

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 99

When troubleshooting MSTP, you executed the display current-configuration command to obtain the configuration file of the device. Which of the following statements is wrong?

- A. Check the port configuration to confirm whether the MSTP-enabled port is enabled with the protocol message sending command. Such as: bpdu enable
- B. No matter whether the BPDU Tunnel is configured on the device or not, MSTP will not affect it correctly
- C. Whether the MSTP port connected to the user terminal device is disabled or configured as an edge port
- D. Check whether the port is added to the correct VLAN

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 100

The link state value information between different ISIS processes of multiple routers is considered to be isolated.

- A. FALSE
- B. TRUE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 101


As shown in the figure, MPLS/BGP IPVPN is deployed on the network.

The MP-BGP neighbor relationship is established between PE1 and PE2 through the LoopbackD interface.

After the configuration is complete, it is found that CE1 and CE2 cannot learn routes from each other.

Run the command to check the error on PE2.

The neighbor information is shown in the figure, what is the most likely cause of the problem?

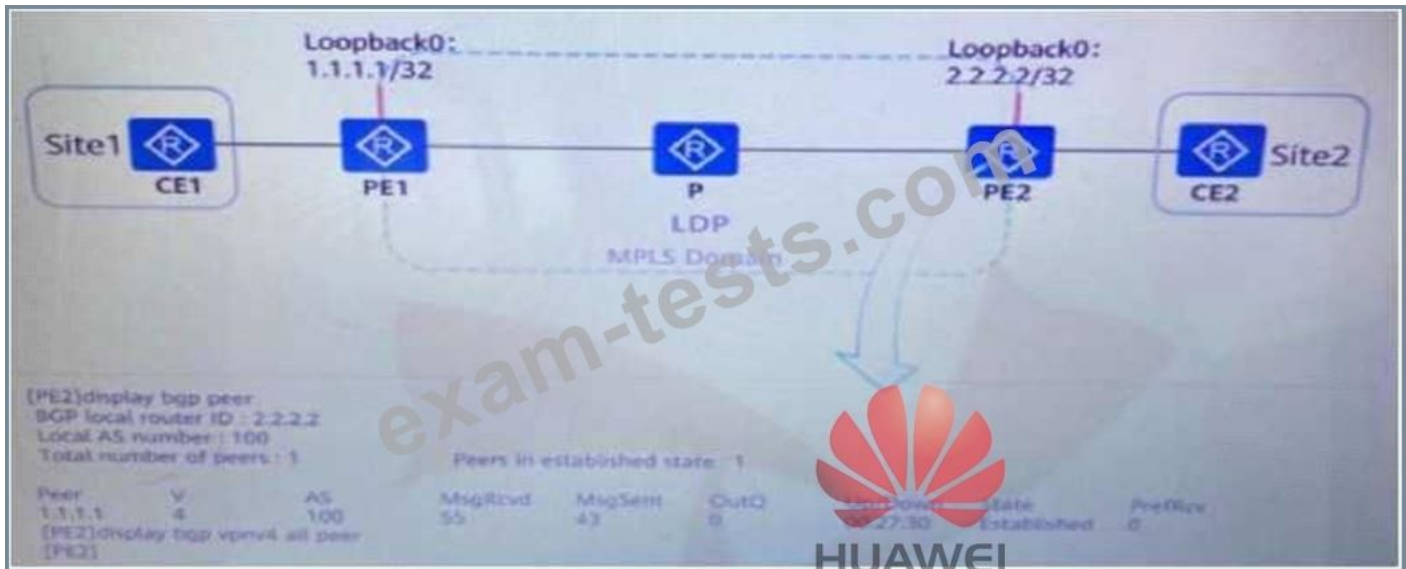

- A. PE1 and PE2 not present BGP-VPN4 Enabling neighbors in unicast address family view
- B. PE1 or PE2 ± of VPN Instance parameter configuration error
- C. PE1 or PE2 with each other CE Misconfigured routing protocol between
- D. PE1 and PE2 between LSPTunnel not established

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 102

Regarding sham link, which of the following description is wrong?

- A. The endpoint address of the sham link is advertised as a VPHv4 address by BGP. Routes that have passed sam1ik can also be imported into BGP in the form of VPNv4 routes
- B. The sham link is a link between two VPN instances. Each VPN instance must have an endpoint address of the sham link, which must be a Loopback with a 32-bit mask in the VPN address space on the PE router. interface address
- C. The sham link can be configured in any area and needs to be configured manually, and there must be a route to the sham link destination address (the sham link endpoint address of the peer PE) in the local VPN instance
- D. In order to forward the VPN flow through the MPLS backbone network, the routing cost of the sham link should be less than the OSPF routing cost of the backdoor road

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 103

If faced with a complex network failure, and it is estimated that the troubleshooting cannot be completed in a short period of time, and the user urgently needs to restore the availability of the network, then the correct approach is.

- A. Tell the user it's not possible

- B. Always try to troubleshoot without informing the user of the current troubleshooting difficulty
- C. Directly build an alternative network environment without notifying customers
- D. Communicate with users whether it is possible to skip the faulty node and build an alternative network environment

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 104

When troubleshooting dual-master faults in a VRRP backup group, which of the following statements is wrong?

- A. There is no need to check whether the switch port that transmits the VRRP advertisement message is in the same VLAN
- B. Need to check whether the virtual IP addresses of the VRRP group are the same
- C. Need to check whether the interface IP address is in the same network segment
- D. Need to check whether the VRRP group ID on the interface is the same

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 105

Which of the following operations may affect the normal operation of the customer network?

(Multiple choice)

- A. Routing protocol configuration changes
- B. Software upgrade
- C. Hardware expansion
- D. Device naming

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 106

What is the command to adjust the link cost value of an IS-IS interface?

- A. isis cost
- B. isis timer hello
- C. isis circuit-level
- D. isis circuit-type

Answer: A ([LEAVE A REPLY](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

NEW QUESTION: 107

The security protection actions that a secure MA, C address can perform does not include which of the following?

- A. Shutdown
- B. Protect
- C. Restrict
- D. Remark

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 108

When MPLS is deployed in the network and the network layer protocol is IP, the route corresponding to the FEC must exist in the IP routing table of the LSR, otherwise the label forwarding entry of the FEC will not take effect.

- A. FALSE
- B. TRUE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 109

Which of the following commands can be used to view BGP VPNv4 routing and BGP private network routing information on PE?

- A. display bgp routing-table ipv4-family vpnv4
- B. display bgp routing-table address-family vpnv4
- C. display vpnv4 bgp routing-table
- D. display bgp vpnv4 routing-table

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 110

(Multiple Choice) Which LSAs in OSPFv3 can be flooded in an area?

- A. Inter-Area-Prefix-LSA
- B. Inter-Area-Router-LSA
- C. Intra-Area-Prefix-LSA
- D. Link-LSA

Answer: (SHOW ANSWER)

NEW QUESTION: 111

A campus has deployed IPv6 for service testing. There are 4 routers in the network, running 0SPFv3 to implement IPv6 network interconnection. As shown in the figure, an engineer checked

the LSDB of R2 and intercepted one of the Link-LSAs. Which of the following statements is true about the description of this LSA?



```
[R2]display ospfv3 lsdb link 0.0.0.3
      OSPFv3 Router with ID (10.1.2.2) (Process 1)
      Link-LSA (Interface GigabitEthernet0/0/0)
      LS Age: 1291
      LS Type: Link-LSA
      Link State ID: 0.0.0.3
      Originating Router: 10.1.2.2
      LS Seq Number: 0x80000003
      Retransmit Count: 0
      Checksum: 0x1A53
      Length: 56
      Priority: 1
      Options: 0x000013 (-|R|-|E|V6)
      Link-Local Address: FE80::2E0:FCFF:FEC:D:4F79
      Number of Prefixes: 1

      Prefix: 2001:DB8:2345:23::/64
      Prefix Options: 0 (-|I|-|I|-)
```

- A. The SA shows 2 does not support external routing, but participates in IPv6 routing calculation
- B. The link-local address of R2 interface GE0/0/0 is: FE80::2E0:FCFF:FEC, D:4F79
- C. The router that generates this LSA is R2 port R2 connected
- D. IPv6 address prefix for GE0/0/0: 2001:DB8:2345:23::/64

Answer: (SHOW ANSWER)

NEW QUESTION: 112

Qinq technology is a technology to expand VLAN space. It can achieve the function of expanding Vlan space by adding a layer of 8D2.1Q Tag on the basis of 8Q2.12 tag message. Which of the following statements about qinq is false?


- A. flexibleQinqAccording to different inner layersTagwith different outer layersTag,correct to the userVLANThe division is more detailed
- B. basicQinqbased on the interface
- C. Qinqtechnology enables private networksLANTransparent transmission on the public network
- D. QinqMakeVLANincreased to4095*4095

Answer: D (LEAVE A REPLY)

NEW QUESTION: 113

A company purchased private lines from two operators. In order to optimize the lines, the company used the 6GP protocol to learn from two Route entries that operate off. However, after the enterprise found that this configuration, the traffic of the port route increased greatly, and the network engineering arrangement After investigation, it was found that the traffic of the two operators was passed to each other through the enterprise egress router. Therefore, the

enterprise intends to use the routing strategy so that the traffic of the packets of different carriers is no longer passed to each other. Is the configuration in the following figure correct?

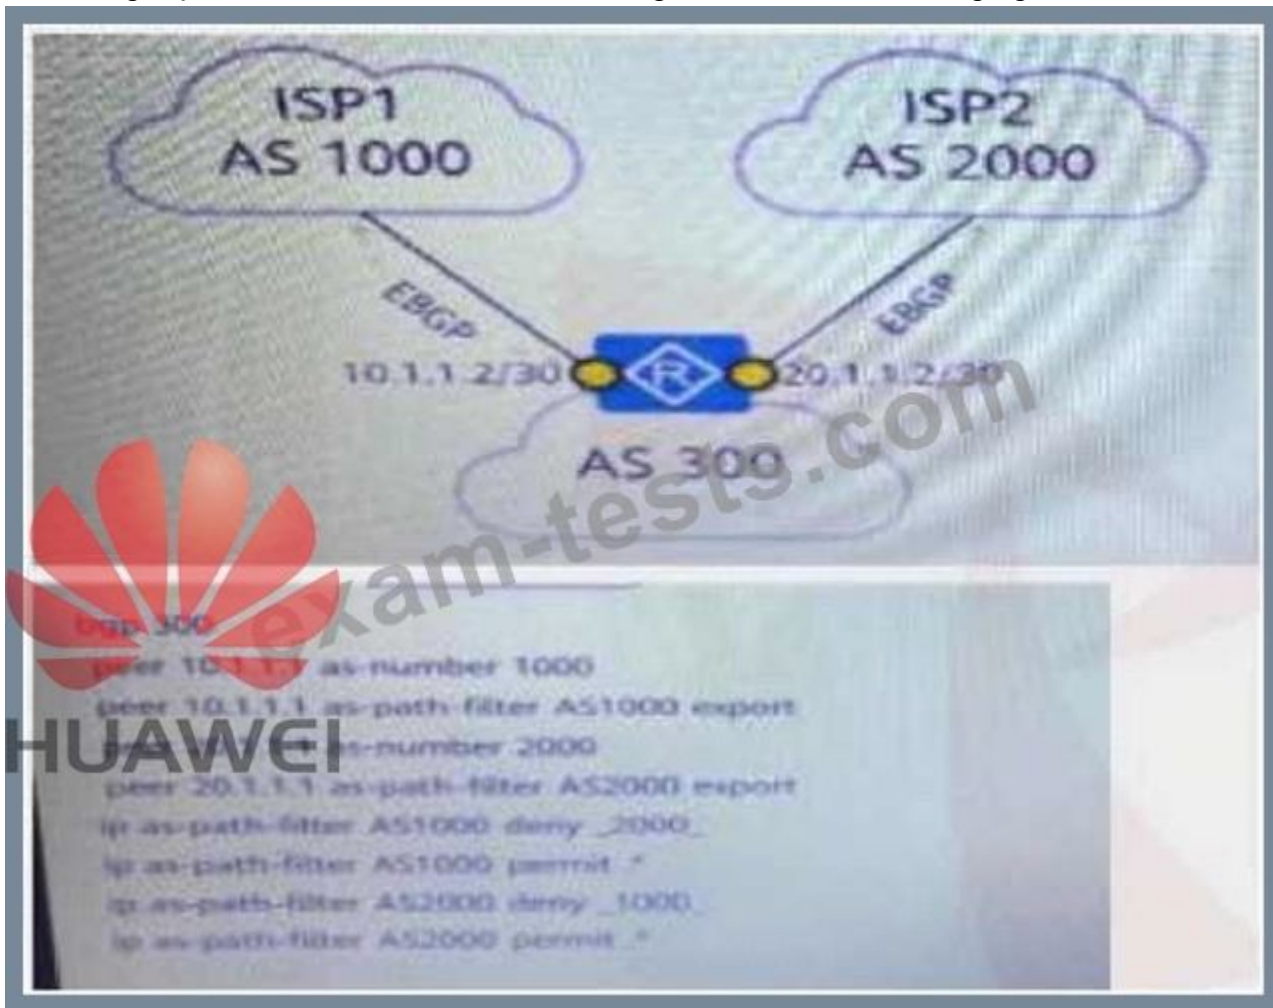

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 114

Which of the following series can be matched by the regular expression 100.S? (Multiple choice)

A. 10000

B. 1001

C. 100

D. 1000

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 115

In BGPIMPLS IP VPN, if the OSPF protocol is used between PEs and CEs to exchange routing information, the domain identifier (Domain ID) is used to distinguish whether the incoming routes in the VPI instance come from the same OSPF domain.

A. False

B. True

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 116

Which of the following statements about the MP_REACH_NLRI attribute of BGP4+ is correct?
(Multiple choice)

- A. The value of AFI (address family) is 2, which represents IPv6
- B. The length of the next hop address can be 16 or 3
- C. The NLRI field carries IPv6 routing prefix and mask information
- D. When the length of the next hop address is 16, the Network Address of Next Hop carries the link local address

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 117

Which of the following regular expressions can only match BGP routing entries that pass through AS200 and then AS300?

- A. 200\$|300\$
- B. _[200 300]_
- C. _(200 300)_
- D. ^200|^300

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 118

According to this picture, we can judge:



```
MT IDs supported      : 0(UP) 2(UP)
Local MT IDs         : 0 2
Area Address(es)    : 49.0022 HUAWEI
Peer IP Address(es) : 10.134.1
Peer IPv6 Address(es): FE80::2E0:FCFF:FE98:2576
Uptime              : 04:04:02
Adj Protocol        : IPV4 IPV6
Peer System Id      : ee8c.a0c2.baf3
```

- A. R4 does not have any IS-IS neighbors
- B. R4 and ee8c.a0c2.baf3 only established IPv6 IS-IS neighbors
- C. R4 and ee8c.a0c2.baf3 have established IPv4 and IPv6 IS-IS neighbors
- D. R4 and ee8c.a0c2.baf3 only established IPv4 IS-IS neighbors

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 119

By default, which of the following types of secure MA, C addresses will be lost when the device restarts?

- A. black hole MA, C address
- B. Security Dynamics MA, C 1W
- C. Safe static MA, C address
- D. Sticky MA, C address

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 120

When troubleshooting a network, if you need to confirm the business traffic path, which of the following tasks may be required? (Multiple choice)

- A. Investigate business traffic path planning in the network design stage
- B. Confirm the network layer business traffic path
- C. Confirm the data link layer service traffic path

Answer: (SHOW ANSWER)

NEW QUESTION: 121

When there are multiple redundant links in the IS-S network, multiple equal-cost routes may appear. Which of the following statements is false about equal-cost routing within an IS-IS network?

- A. For each route in the equal-cost route, a priority can be specified, and the route with higher priority will be preferred. the rest as backup routes
- B. When the number of equal-cost routes in the network is greater than the number configured by the command, and these routes have the same priority, Preferred next hop deviceSystem IDLarge routes for load balancing
- C. If load sharing is configured, the traffic will be evenly distributed to each link
- D. After configuring equal-cost route priorityJS-ISWhen the device forwards the traffic reaching the destination network segment, it will not adopt the load balancing method, but forward the traffic to the next hop with the highest priority

Answer: D (LEAVE A REPLY)

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumpspass.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 122

As shown in the figure, OSPF is enabled on all interfaces of the router. Which of the following statements is correct?



- A. R2 in the area0 generated in Type2 LSA contains 10.0.2.2/24 routing information
- B. R2 in the area0 generated in Type3 LSA contains 10.0.2.2/32 routing information
- C. R2 in the area0 generated in Type1 LSA contains 10.0.2.2/32 routing information
- D. R2 in the area0 generated in Type5 LSA contains 10.0.2.2/32 routing information

Answer: C (LEAVE A REPLY)

NEW QUESTION: 123

During the process of viewing the debug output through the SSH terminal, a lot of information pops up. Which of the following operations can make the Monitor terminal no longer pop up the debug message? (Multiple choice)

- A. Exit the current Monitor interface, log in to the device again using SSH to open a new Monitor interface
- B. Open the notepad, enter undo terminal debugging, copy the command line, and paste it into the Monitor interface
- C. Open the notepad, enter undo terminal monitor, copy the command line, and paste it into the monitor interface
- D. Open the notepad, enter undo debugging all, copy the command line, and paste it into the Monitor interface

Answer: B,D (LEAVE A REPLY)

NEW QUESTION: 124

Regarding the label space of MPLS, the description is wrong:

- A. penultimate jump LSR When performing label exchange, if the exchanged label value is found to be 3, by default, the label is popped and the message is sent to the last hop
- B. If the out tag value is 0, the router will directly discard the packet

C. 16~1023 is static LSP and static CR-LSP shared table space

D. 1024 Above are LDP, RSVP-TE. MP-BGP Label space shared by other dynamic signaling protocols

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 125

(Drag and drop) Please match the following DHCP attack types with corresponding explanations.

DHCP starvation attack		The attacker continuously requests a large number of IP addresses from the DHCP server, resulting in no IP address assigned to normal users
DHCP phishing attack		The attacker makes the switch learn the wrong IP/Mac mapping relationship through the attack, so as to steal user traffic data.
Man in the middle attack		The attacker responded to DHCP client by impersonating DHCP server
DHCP message flooding attack		The attacker sends the largest DHCP message to the device in a short time

Answer:

DHCP starvation attack	DHCP starvation attack	The attacker continuously requests a large number of IP addresses from the DHCP server, resulting in no IP address assigned to normal users
DHCP phishing attack	Man in the middle attack	The attacker makes the switch learn the wrong IP/Mac mapping relationship through the attack, so as to steal user traffic data.
Man in the middle attack	DHCP phishing attack	The attacker responded to DHCP client by impersonating DHCP server
DHCP message flooding attack	DHCP message flooding attack	The attacker sends the largest DHCP message to the device in a short time

NEW QUESTION: 126

IS-IS supports multi-instance and multi-process, that is, on an IS-IS router. You can configure multiple VPN instances to be associated with multiple IS-IS processes.

Which of the following descriptions about IS-IS multi-instance and multi-process are correct? (Multiple choice)

A. A VPN instance can be associated with multiple different IS-IS processes

- B. One IS-IS process can be associated with multiple different VPN instances
- C. One IS-IS process can only be associated with one VPN instance
- D. If an IS-IS router creates multiple IS-IS processes, each process does not affect each other and is independent of each other

Answer: A,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 127

Configure ipv6 preference in IS-IS protocol view. The function of this command is to configure the priority of IPv6 routes generated by IS-Is protocol.

- A. True
- B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 128

The rollback operation of project cutover can be temporarily determined according to the situation during cutover, and no advance plan is required.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 129

If the temperature of the device is found to be too high, it can be concluded that the fan has failed

- A. FALSE
- B. TRUE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 130

If you want to check files under Flash, which command should use?

- A. dir flash:
- B. display patch-information
- C. dir sdl:
- D. dir sd0:

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 131

What types of Link Types are included in the Router LSA in OSPF? (Multiple choice)

- A. StubNet
- B. Vlink
- C. TransNet
- D. P-2-P

Answer: A,B,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 132

. OSPFv2 is an IGP running on an IPv4 network. OSPFv3 is an IGP running on an IPv6 network. Compared with OSPFv2, OSPFv3 has similar LSA, but the function is slightly different. The following is the description of the LSA function of OSPFv3. Please drag the LSA to the correct LSA function column.

Inter-Area-Prefix-LSA	Describe the route to the outside of the AS
Link-LSA	Describe an IPv6 address prefix in the area
Inter-Area-Router-LSA	Describe network segment information and rely on topology information for routing calculations
Inter-Area-Prefix-LSA	Describe the route to the ASBR
AS-External-LSA	Describe the link-local address and IPv6 prefix list of this interface

Answer:

Inter-Area-Prefix-LSA	AS-External-LSA
Link-LSA	Inter-Area-Prefix-LSA
Inter-Area-Router-LSA	Inter-Area-Prefix-LSA
Inter-Area-Prefix-LSA	Inter-Area-Router-LSA
AS-External-LSA	Link-LSA

NEW QUESTION: 133

According to this picture, Xinmen can be judged?

172.16.1.1 -q 10 17116.1.4

ip route 172.16.1.4(172.16.1 <). max hop 30 .packet length 40,pms CTRL.C
to break

10.1.1.12 40 ms 10 ms 10 ms 10 ms 10.1.1.22 30 ms 20 ms 20 ms 20 ms 20 ms
30 ms 10.1.1.1? 10 ms 10 ms 20 ms 20 ms 10.1-12.2 20 ms 20 ms 20
ms 20 ms
2 10.1.1.24 20 ms 10.1.1.24 20 ms 10.1.24 20 ms 10.1.24 20 ms
20 ms 20 ms 20 ms
10.1.1.24 20 ms 10.1.24 20 ms 10.1.24 20 ms 10.1.24 20 ms 20 ms
[network



- A. R1 access 172.16.1.4 have 4 equivalent paths
- B. R1 access 172.16.1.4 have 2 equivalent paths
- C. R1 access 172.16.1.4 need to go through 2 hop router
- D. R1 access 172.16.1.4 need to go through 4 hop router

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 134

The network administrator A wants to use the IP Prefix List to match specific routing entries. Which of the following routes will be matched by the IP Prefix List? (Multiple choice)

- A. 10.0.0.1/30
- B. 10.0.0.0/24
- C. 10.0.2.0/24
- D. 10.0.1.0/24

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 135

The routing policy tools that BGP can use mainly include Filter policy and Route-policy. Its Filter policy can only filter routes, and Route-policy can only modify routes.

- A. TRUE
- B. FALSE

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 136

Which of the following regarding the configuration description is wrong?

```
[Huawei]dhcp enable
[Huawei]interface GigabitEthernet 0/0/1
[Huawei-GigabitEthernet0/0/1]dhcp option82 insert enable
[Huawei-GigabitEthernet0/0/1]dhcp snooping enable
[Huawei-GigabitEthernet0/0/1]dhcp snooping trusted
```

- A. If the DHCP request message received by the GigabitEthernet0/0/1 interface does not contain the SubOption information of Option82, the device will generate Option82 and insert it into the message
- B. Enabling the DHCP Snooping configuration can be used to prevent DHCP Server counterfeiters from attacking
- C. Enabling the DHCP Snooping configuration can be used to prevent ARP spoofing attacks
- D. Configure GigabitEthernet0/0/1 as a trusted interface

Answer: C ([LEAVE A REPLY](#))


Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumps.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 137

As shown in the figure, R1, R2, R3, and R4 are in the same MPLS domain, and LDP is used to allocate MPLS labels between devices. R4 is the FEC Egress LSR of 4.4.4.0/24. If you want to realize that when R1 accesses 4.4.4.0/24, R4 does not need to query the label table but can understand the forwarding priority of the data, then R3's outgoing label for the FEC should be (). (Please fill in the Arabic numerals directly, without symbols)

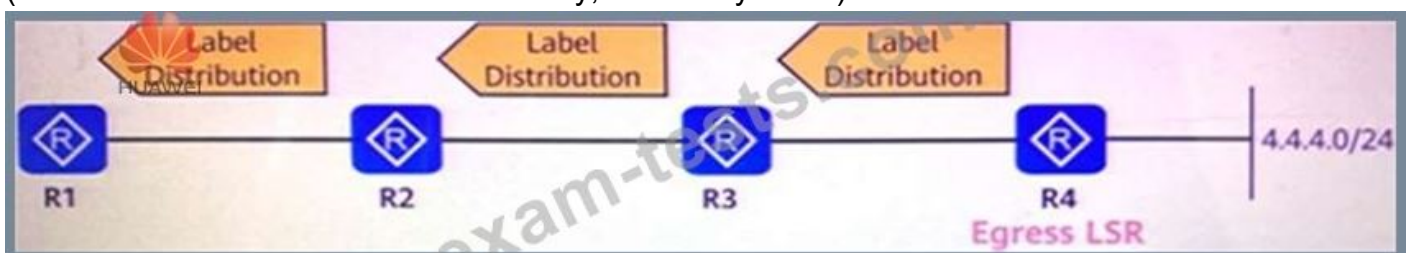

Answer:

0

NEW QUESTION: 138

As shown in the figure, PE1 and PE2 and their respective CEs exchange private network routing information through OSPF, and the same DomainID is configured on PE1 and PE2. When routes are imported from BGP to OSPF on PE2, which of the following types of SA may be delivered to CE2? (Multiple choice)



- A. Type3 LSA
- B. Type7 LSA
- C. Type5 LSA
- D. Type1 LSA

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 139

Which of the following statements is true about the role of ping and tracert?

- A. TracertMust be able to trace every hop from source to destinationIPAddress
- B. Pingthrough one-wayicmp echo requestPacket inspection and bidirectional reachability of the correct end
- C. pingThe reachability from the local end to the peer end is verifieD. but it does not mean that the peer end to the local end must be reachable
- D. tracertandpingThe function is the same, just the name is different

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 140

The output information of a router is as follows. Which of the following reasons cause the OSPF adjacency relationship to fail to be established normally? (Multiple choice)

```

Huawei>display ospf error interface GigabitEthernet 0/0/0
OSPF Process 1 with Router ID 10.0.12.2
OSPF error statistics
Interface: GigabitEthernet0/0/0 (10.0.12.2)
General packet errors:
0 : Bad version 0 : Bad checksum
1 : Bad area id 0 : Bad authentication type
0 : Bad authentication key 0 : Unknown neighbor
0 : Bad net segment 0 : Extern option mismatch
0 : Router id confusion

HELLO packet errors:
0 : Netmask mismatch 1 : Hello timer mismatch
0 : Dead timer mismatch 0 : Invalid Source Address

```

- A. The IP address mask of the interface is inconsistent
- B. The interval for sending Hello packets is inconsistent
- C. Inconsistent area codes
- D. Inconsistent area types

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 141

According to this picture, you can judge

```

<R1>display ipv6 routing-table protocol bgp

Public Routing Table: BGP
Summary Count : 1

BGP Routing Table's Status : < Active >
Summary Count : 1

Destination : 3002::3 PrefixLength : 128

```

```

NextHop      : 3000:FDEA::3                Preference  : 255
Cost         : 0                          Protocol    : IBGP
RelayNextHop : FE80::2E0:FCFF:FE98:2577   TunnelID   : 0x0
Interface    : GigabitEthernet0/0/1       Flags      : RD
<R1>

```

- A. R1 with 3000:FDEA::3 is IBGP neighbor
- B. R1 learned route 3002 through IBGP::3/128
- C. The optimal outgoing interface for R1 to access room 3000: FDEA::3 is GigabitEthernet0/0/1
- D. R1 has a TCP connection with 3000:FDEA::3

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 142

According to this diagram, can we break the

Database information for					
Unk State Database					
tSPID	SeqNum	Checksu	Holdtmc	LFngrh	ATT/P/OL
_a0c2-baf2 00-00	00000000	0x4c4^1	1115G	B3	1/Q/O
ee8c a0c2 buaf2 02-	0K0000C	0x2*3	ais	5*	o/o/o
Le<8c-a0c2 bafaXM>-00	0x00000	0x462f	1187	83	/OA>
_a0c2-baf2 00-00	00000000	0x4c4^1	1115G	B3	1/Q/O
ee8c a0c2 buaf2 02-	0K0000C	0x2*3	ais	5*	o/o/o
Le<8c-a0c2 bafaXM>-00	0x00000	0x462f	1187	83	/OA>
Ko&c 3*0^..00.	0x000000	0x2e^7	10B2	54	
	0x000000	0x843fS	10S3	103	

- A. system-IDforee8c.a0c2.baf2device whose type isLevel-1-2
- B. R4dry onlyLevel2
- C. system-IDforee8c.a0c2.baf2The device' whose type isLevel-1
- D. R4belong only toLevel-1

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 143

The router ID of OSPF V3 needs to be configured in dotted decimal with a length of 128 bits.

- A. True
- B. False

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 144

As shown in the figure, which of the following statement is correct? (Multiple choice)

```
<R1>display ospf lsdb
```

OSPF Process 1 with Router ID 172.16.1.1

Link State Database

Area: 0.0.0.0

Type	LinkState ID	AdvRouter	Age	Len	Sequence	Metric
Router	172.16.1.3	172.16.1.3	216	60	80000009	1
Router	172.16.1.2	172.16.1.2	214	60	80000008	2
Router	172.16.1.1	172.16.1.1	217	60	80000007	2
Router	172.16.1.4	172.16.1.4	209	60	80000009	1
Network	10.1.24.2	172.16.1.4	209	32	80000002	0
Network	10.1.13.2	172.16.1.3	218	32	80000001	0
Network	10.1.12.2	172.16.1.2	218	32	80000001	0
Network	10.1.34.2	172.16.1.4	209	32	80000002	0

- A. There are 8 MA networks in area 0
- B. There are 4 MA networks in area 0
- C. There are 8 routers in area 0
- D. There are 4 routers in area 0

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 145

As shown in the figure, all routers run OSPF.



Which of the following statements is correct?

- A. R2 forwards the Router LSA generated by R3 to R1
- B. R2 only generates Router LSA in area 0
- C. R2 forwards the Router LSA generated by R1 to R3
- D. R2 generates Router LSA in both area 1 and area 0

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 146

As shown in the figure, the carrier BGP/MPLS IP VPN backbone network constructs SP through DP. If you want to realize the intercommunication between the two sites of user X through the BGP/MPLS IPVPN network, the 32bit mask of Loopback interface address must be used between PE1 and PE2 to establish the MP-IBGP peer relationship.



- A. TRUE
- B. FALSE

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 147

In an intra-domain MPLS VPN network, when a data packet enters the public network and is forwarded, it will be encapsulated with two layers of MPLS labels. Which of the following description is wrong about the two layers of labels? (Multiple choice)

- A. The outer label is used to correctly send the data packet to the corresponding VPN on the PE device
- B. By default, the outer label is ejected before the packet is forwarded to the last-hop device
- C. The outer label of MPLS VPN is allocated by the LDP protocol or statically, and the inner label is allocated by the MP-BGP neighbor at the correct end.
- D. The outer label of MPLS VPN is called the private network label. The inner label is called the public network label.

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 148


MPLS is called multi-protocol label switching. Regarding the label description in MPLS, which of the following is correct? (Multiple choice)

- A. A label is an identifier with a fixed length and only local meaning, which is used to uniquely identify the FEC to which a group belongs
- B. MPLS supports single-layer labels as well as multi-layer labels
- C. The label is carried by the header of the MIPLS message and has a global meaning, that is, the label value of all routers cannot be repeated
- D. MPLS system has a variety of label publishing protocols, such as LDP is a label publishing protocol

Answer: (SHOW ANSWER)

NEW QUESTION: 149

As shown in the figure, all interfaces of the router enable OSPF, among which R4 and R5 can establish OSPF virtual connections.

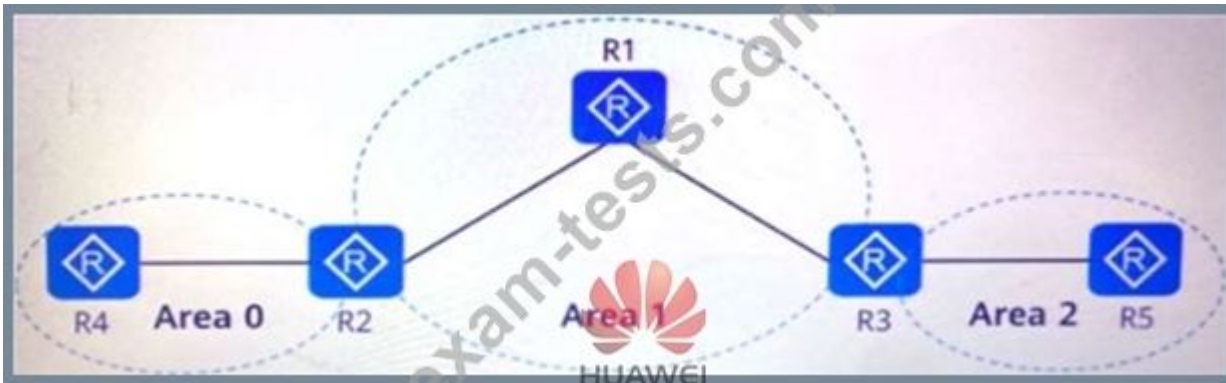

- A. TRUE
- B. FALSE

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 150

Which of the following are static information coking analysis? (Multiple choice)

- A. Interface type
- B. Device type
- C. Packet loss rate
- D. License

Answer: A,B,D ([LEAVE A REPLY](#))

NEW QUESTION: 151

During the process of viewing the debug output through the SSH terminal, a lot of information pops up. Which of the following operations can make the Moni tor terminal no longer pop up the debug message? (Multiple choice)

- A. Open the notepad, enter undo debugging all, copy the command line, and paste it into the Monitor interface
- B. Open the notepad, enter undo terminal debugging, copy the command line, and paste it into the Monitor interface
- C. Open the notepad, enter undo terminal monitor, copy the command line, and paste it into the Monitor interface
- D. Exit the current Moni tor interface, log in to the device again using SSH to open the new Monitor interface

Answer: ([SHOW ANSWER](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been**

updated and answers have been corrected get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:
https://www.braindumpsPASS.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html
(465 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 152

ping -a Xc Ys z -vpn-instance M 10.5.16.2, the meaning of this command is:

- A. Should ping of ICMP The request packet size is Z (excluding IP and ICMP head)
- B. Should ping package source IP address is X
- C. Should ping package belongs to VPN example M
- D. Should ping send Y individual ICMP ask

Answer: (SHOW ANSWER)

NEW QUESTION: 153

Which of the following is wrong about DHCP Snooping?

- A. Enable DHCP Snooping globally, without any post parameters, the device only processes DHCPv4 messages by default
- B. Enable the DHCP Snooping function in the VLAN view, and the command function of DHCP messages belonging to the VLAN received by all interfaces of the device will take effect
- C. DHCP Snooping can prevent illegal attacks by setting trusted ports (all interfaces are untrusted by default)
- D. Enable the DHCP Snooping function in the interface view, then all the DHCP message command functions under the interface will take effect

Answer: (SHOW ANSWER)

NEW QUESTION: 154

BGP routing policies can control the advertisement and reception of routes.

- A. True
- B. False

Answer: A (LEAVE A REPLY)

NEW QUESTION: 155

Deploying port isolation technology in Ethernet can realize Layer 2 intercommunication and Layer 3 isolation, making networking more flexible.

- A. correct
- B. mistake

Answer: B (LEAVE A REPLY)

NEW QUESTION: 156

In the absence of a header, the Domain ID of each OSPF process running on the router and the process ID of the process Be consistent and can be modified under the process through the domain-id command

- A. False
- B. True

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 157

The RR rules for advertising routes violate the IBGP split horizon rules, which may cause loops in the AS. Which routing attributes does RR use to prevent loops?

- A. Cluster List k
- B. AS-PATH
- C. Nexthop
- D. Originator ID

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 158

Basic QinQ can choose the outer tag encapsulation method according to the business type.

- A. False
- B. True

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 159

The routing attributes of the three routing entries are shown in the figure. Assuming that the next hop of the three routing entries are all reachable, when the three routing entries arrive at the BP router in sequence, by default, BGP will finally select one route entry?

Name	Prefix	AS_PATH	MED	IGP Cost
Route A	10.1.1.0/24	3		12
Route B	10.1.1.0/24	12	150	11
Route C	10.1.1.0/24	12	100	13

- A. Route C
- B. Route B
- C. Route A

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 160

According to this picture, cooked l'] can be judged?

vR1#display isis interface

Interface information for ISIS(1)

Interface Id	IPV4.State	IPV6.State	MTU	Type	DIS
GE0/0/0	001	Up	1497	L1/L2	No/No
GE0/0/1	002	Up	1497	L1/L2	No/No
1Loop0	001	Up	1500	L1/L2	one



- A. R1 of GE0/0/1 Interface is not enabled IS-IS IPv6
- B. R1 of GE0/0/1 interface IS-IS The interface type is Level-1
- C. R1 of GE0/0/0 interface IS-IS The interface type is Level-1-2
- D. R1 of GE0/0/0 interface is enabled IS-IS IPv6

Answer: C,D (LEAVE A REPLY)

NEW QUESTION: 161

When deploying BGPIMPLS IPVPN, when two VPNs have a common site, the common site must not use overlapping address space with other sites of the two VPNs.

- A. False
- B. True

Answer: A (LEAVE A REPLY)

NEW QUESTION: 162

When OSPFv2 evolves to OSPFv3, the format and function of LSA are exactly the same, except that the network layer address in LSA changes from IPv4 to IPv6.

- A. FALSE
- B. TRUE

Answer: A (LEAVE A REPLY)

NEW QUESTION: 163

In addition to virtual connections, what type of IPv6 address is the source IPv6 address of OSPFv3's Hello text?

- A. link-local address
- B. Global Unicast Address
- C. IPv6 anycast address
- D. unique local address

Answer: (SHOW ANSWER)

NEW QUESTION: 164

To speed up the detection of link failures in an IS-IS network, you can associate IS-IS with BFD.

- A. True

B. False

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 165

BFD session down will cause the direct link to fail.

A. FALSE

B. TRUE

Answer: A ([LEAVE A REPLY](#))

Valid H12-831_V1.0-ENU Dumps shared by BraindumpsPass.com for Helping Passing H12-831_V1.0-ENU Exam! BraindumpsPass.com now offer the **newest H12-831_V1.0-ENU exam dumps**, the BraindumpsPass.com H12-831_V1.0-ENU exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com H12-831_V1.0-ENU dumps with Test Engine here:

https://www.braindumpspass.com/Huawei/H12-831_V1.0-ENU-practice-exam-dumps.html

(465 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)