

Magento.Magento-2-Associate-Developer.v2022-03-15.q107

Exam Code:	Magento-2-Associate-Developer
Exam Name:	Magento 2 Certified Associate Developer Exam
Certification Provider:	Magento
Free Question Number:	107
Version:	v2022-03-15
# of views:	3339
# of Questions views:	1070
https://www.exam-tests.com/Magento-2-Associate-Developer-exam/Magento.Magento-2-Associate-Developer.v2022-03-15.q107.html	

NEW QUESTION: 1

In a code review of a merchant's site you have discovered that there are multiple observers for the checkout_submit_all_after event. After closer inspection, you notice one of these observers is relying on the others being executed before it is called.

What risk does this pose, and how can it be mitigated?

- A. Order of listener execution cannot be guaranteed, resulting in a fragile implementation. This code should be re-worked using plugins
- B. Magento only supports one observer per event. These observers will need to be combined into a single point of customization.
- C. There is no risk posed as long as each event observer specifies a correct sortOrder. Nothing needs to be changed.
- D. Event observers are fired in alphabetical order of the observer name. There is no risk here.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 2

While developing a module you need to modify an existing Data Patch.

How can you force Magento to execute an existing Data Patch file again?

- A. By removing the Data Patch, running the command: bin/magento setup:db-data:upgrade, then copying the file back and running the command again
- B. By changing the version of the Data Patch in the getVersion method
- C. By modifying the data_version value in the setup_module table
- D. By deleting the record with the Data Patch class name from the table patch_list table

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 3

Which three scopes can be used to set different System Configuration values in Magento? (Choose three.)

- A. Store View
- B. Website
- C. Language
- D. Area
- E. Store

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 4

You have created a new section in system configuration under the Catalog tab:

```
<section id="mysection" translate="label" sortOrder="90" showInDefault="1" showInWebsite="1"
showInStore="1">
    <label>My Section</label>
    <tab>catalog</tab>
    ...
</section>
```

How do you restrict an access to the section using Magento ACL?

A In the system.xml file add resource node:

```
<section id="mysection" translate="label" sortOrder="90" showInDefault="1" showInWebsite="1"
showInStore="1">
    <label>My Section</label>
    <tab>catalog</tab>
    <resource>MyCompany_MyModule::mysection</resource>
    ...
</section>
```

B In the file etc/acl.xml create a resource entry:

```
Magento_Backend::admin > Magento_Backend::stores >
    Magento_Backend::stores_settings > Magento_Config::mysection
```

C In the etc/adminhtml/routes.xml add:

```
<router id="admin">
    <route id="catalog" frontName="mysection">
        <module name="MyCompany_MyModule" before="Magento_Backend" />
        <resource>MyCompany_MyModule::mysection</resource>
    </route>
</router>
```

D In the etc/adminhtml/menu.xml specify:

```
<add id="MyCompany_MyModule::mysection" title="My Section" translate="title"
    module="MyCompany_MyModule" sortOrder="10"
    parent="Magento_Config::stores_settings"
    action="system_config/edit/section/mysection/"
    resource="MyCompany_MyModule::mysection"
/>
```

A. Option B

- B. Option D
- C. Option A
- D. Option C

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 5

Which two ways does Magento persist category relationships in the database? (Choose two.)

- A. Using slash-separated values in the path field
- B. in the parent_id field
- C. Using comma-separated values in the parent-ids field
- D. in the table catalog_category_index

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 6

What order operation is available in the My Account section in the storefront?

- A. Reorder
- B. Invoice
- C. Refund
- D. Edit order

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 7

You have created a module with a custom ACL resource and want to restrict access to resources of your module. Which three items are restricted based on ACL role permissions? (Choose three.)

- A. Adminhtml controllers
- B. Storefront login
- C. System configuration sections
- D. Webapi resources
- E. CLI Commands

Answer: A,C,D ([LEAVE A REPLY](#))

NEW QUESTION: 8

There are two different configurable products which both share one variation. The shared variation is represented by the same simple product.

A customer added both configurables to the cart with the same selected variation?

How will they be displayed?

- A. As two separate line items with quantity 1 each
- B. As one line item which lists both configurable products with quantity 1 each
- C. As one line item of the first product with quantity 2
- D. As one line item of the second product with quantity 2

Answer: B ([LEAVE A REPLY](#))

Explanation/Reference: <https://firebearstudio.com/blog/the-complete-guide-to-magento-2-configurable-products.html>

NEW QUESTION: 9

You need to find all orders in the processing state. You have written the code:

```
$orderRepository->getList($searchCriteriaBuilder->addFilter('state', 'processing'));
```

When you run the code, you get the following exception:

```
Uncaught TypeError: Argument 1 passed to Magento\Sales\Model\OrderRepository::getList() must be an instance of Magento\Framework\Api\SearchCriteriaInterface, instance of Magento\Framework\Api\SearchCriteriaBuilder given.
```

How do you resolve the exception?

- A. Clear generated code to get a new version of SearchCriteriaBuilder
- B. Use dependency injection to load an instance of the SearchCriteria class
- C. Change the getList parameter to: `$searchCriteriaBuilder->addFilter('state', 'processing')->create()`
- D. Specify a preference in di.xml to map SearchCriteriaBuilder to SearchCriteriaInterface

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 10

How do you add a foreign key to an existing table created by another module?

- A. This can only be done with raw SQL in a Schema Patch file
- B. Create the etc/db_constraints.xml file and specify foreign key there in the constraint node
- C. Run the command `bin/magento setup:db-schema:upgrade <table> <constraint declaration>`
- D. Create etc/db_schema.xml file with the table node and constraint child node

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 11

You have created a new block and will be adding this block on every page. The block contains user-specific information and cannot be cached. The block is added to the default.xml with:

```
<block class="MyCompany\MyModule\Block\Unique" name="unique" cacheable="false" after="-">
```

What does this accomplish?

- A. The block will be loaded on the store front using AJAX
- B. All store front pages are no longer cacheable
- C. FPC will cache the block content for all cacheable pages
- D. FPC will be bypassed for this block and all other page content will be cached

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 12

How does Magento store customer address attribute values?

- A. Customer address is a flat entity, so all values are stored in the customer_address_entity table
- B. Customer address is an EAV entity, so all values are stored in the customer_address_entity table and related values tables

- C. Customer address is not an entity, so its properties are customer attributes
- D. Customer address is an attribute of the customer, so it doesn't have its own attributes

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 13

Assume that a customer's cart only includes one downloadable product.

What effect will it cause on the quote object?

- A. The quote object will have a downloadable URL instead of an address
- B. The quote object will not have shipping address
- C. The quote object will not have any address
- D. The quote object will not have a billing address

Answer: ([SHOW ANSWER](#)**)**

Explanation

NEW QUESTION: 14

You need to add a new text attribute to all products in the Magento store. When this attribute is displayed on the product page, its values must be different depending on the selected language.

Keeping simplicity in mind, how do you add this attribute?

- A. Use a Data Patch to create a new EAV attribute
- B. Use the admin panel to create a new extension attribute
- C. Use the Magento CLI to create a new custom attribute, then generate dictionaries for all supported languages
- D. Add a new column to the catalog_product_entitytable using declarative schema

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 15

You are building a report using complex SQL aggregations to locate the required data.

In what type of class do you put these SQL statements?

- A. Helper
- B. Model
- C. Resource model
- D. Repository

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 16

You are adding a child node to the product.info block using the XML:

```
<referenceBlock name="product.info">
    <block class="MyCompany\MyModule\Block\Custom"
        name="myblock"
        as="mynewblock"
        template="custom.phtml"/>
</referenceBlock>
```

How will this block be rendered?

- A. Child block nodes are automatically rendered as HTML
- B. Automatically if the block class Custom implements the _toHtml method
- C. The layout is invalid since block elements cannot be nested
- D. By calling \$block->getChildHtml('mynewblock') in the parent block's template

Answer: D ([LEAVE A REPLY](#))

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPass.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (105 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

\Magento\Sales\Model\Api\OrderRepositoryInterface::getList accepts a SearchCriteriaInterface to filter and sort information.

What class assists in creating an instance for SearchCriteriaInterface?

- A. \Magento\Framework\Api\SearchCriteriaFactory
- B. \Magento\Backend\Api\SearchCriteriaGenerator
- C. \Magento\Sales\Model\Order\SearchCriteria
- D. \Magento\Framework\Api\SearchCriteriaBuilder

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 18

You have configured an event observer to watch the checkout_submit_all_after event using this XML:

```
<event name="checkout_submit_all_after">
  <observer name="exampleObserver" instance="MyCompany\MyModule\Observer\CheckoutObserver" />
</event>
```

What is the required class definition for the event observer?

- A.

```
class CheckoutObserver extends Event\ObserverAbstract
{
    public function execute(Event\Observer $observer) { /* observer code */ }
}
```
- B.

```
class CheckoutObserver implements Event\ObserverInterface
{
    public function execute(Event\Observer $observer) { /* observer code */ }
}
```
- C.

```
class CheckoutObserver
{
    public function exampleObserver(Event\Observer $observer) { /* observer code */ }
}
```

```
class CheckoutObserver implements Event\ObserverInterface
{
    public function exampleObserver(Event\Observer $observer) { /* observer code */ }
}
```

D. }

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 19

You are developing a module MyCompany_StoreInfo to display information about brick and mortar stores on a frontend page. The displayed information varies based on the country of a given store.

What two elements automatically render their children? (Choose two.)

- A. <container name="shop.info.details"/>
- B. <block class="\Magento\Framework\View\Element\Template" name="shop.info.details"/>
- C. <block class="\Magento\Framework\View\Element\AbstractBlock" name="shop.info.details"/>
- D. <block class="\Magento\Framework\View\Element\Text\ListText" name="shop.info.details"/>

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 20

You are implementing a before plugin in MyCompany_Magic. It will intercept the same method that MyCompany_Admission is already intercepting using a before plugin: Topmenu::getBlockHtml Which two actions are required to ensure the new plugin will execute last? (Choose two.)

- A. Include a sortOrder="20" on the new plugin in MyCompany_Magic's etc/di.xml file
- B. Add MyCompany_Admission as a dependency in MyCompany_Magic's etc/module.xml file
- C. Configure plugin sequencing for both plugins in MyCompany_Magic's etc/plugin_sequence.xml file
- D. Set a sortOrder="10" for MyCompany_Admission's plugin in MyCompany_Magic's etc/di.xml

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 21

\Magento\Sales\Model\Api\OrderRepositoryInterface::getList accepts a SearchCriteriaInterface to filter and sort information.

What class assists in creating an instance for SearchCriteriaInterface?

- A. \Magento\Framework\Api\SearchCriteriaFactory
- B. \Magento\Framework\Api\SearchCriteriaBuilder
- C. \Magento\Sales\Model\Order\SearchCriteria
- D. \Magento\Backend\Api\SearchCriteriaGenerator

Answer: B ([LEAVE A REPLY](#))

Explanation/Reference: <https://github.com/magento/magento2/blob/2.3/lib/internal/Magento/Framework/Api/SearchCriteriaInterface.php>

NEW QUESTION: 22

You have created a module with a custom ACL resource and want to restrict access to resources of your module.

Which three items are restricted based on ACL role permissions? (Choose three.)

- A. CLI Commands
- B. Webapi resources
- C. Storefront login
- D. System configuration sections
- E. Adminhtml controllers

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://www.mageplaza.com/magento-2-module-development/magento-2-acl-access-control-lists.html>

NEW QUESTION: 23

There are two different configurable products which both share one variation. The shared variation is represented by the same simple product.

A customer added both configurables to the cart with the same selected variation?

How will they be displayed?

- A. As one line item of the first product with quantity 2
- B. As one line item of the second product with quantity 2
- C. As one line item which lists both configurable products with quantity 1 each
- D. As two separate line items with quantity 1 each

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 24

A module MyModule needs to send notifications to customers only when the account was modified from a mobile app using the REST web APIs.

You decided to implement an observer for customer_save_after_data_object event.

In which file do you declare the observer?

- A. etc/webapi_rest/events.xml
- B. etc/adminhtml/events.xml
- C. etc/webapi/rest_events.xml
- D. etc/events.xml

Answer: D ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/256268/how-to-trigger-observer-by-rest-api>

NEW QUESTION: 25

You have been given the task of importing products from an external source. You decide to create a custom module to do this. The class handling the import creates a product for each record, sets the data on it and saves it to the database.

What do you inject into a constructor to represent each product you create?

- A. \Magento\Catalog\Model\Product
- B. \Magento\Catalog\Api\Data\ProductInterfaceFactory
- C. \Magento\Catalog\Api\Data\ProductInterface
- D. \Magento\Catalog\Model\ProductBuilder

Answer: B ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/102922/programmatically-create-a-simple-product-in-magento-2>

NEW QUESTION: 26

You are tasked to install an extension to the merchant's Magento instance.

The extension is developed by the company called MyCompany and its codebase is available from all four locations listed below.

Which two installations options do you choose from to prevent version conflicts during upgrade? (Choose two.)

- A. Use composer CLI to pull the code from MyCompany's repository
- B. Download the extension code from the developer's website, and put it into app/code
- C. Use Magento web setup wizard to pull the code from Magento's composer repository
- D. Clone the code from GitHub and put it into the vendor directory

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 27

In a custom module you are adding a new field to the store configuration. The field will set the value for the configuration path mycompany/mymodule/myoption.

How do you supply the default value for that configuration option?

- A. In the menu/default/section/group/field node in the file etc/adminhtml/menu.xml
- B. In the system/mycompany/group/mymodule/field/myoption node in the etc/system.xml file
- C. In the config/default/mycompany/mymodule/myoption node in the etc/config.xml file
- D. In the system/section/group/field/value node in the etc/adminhtml/system.xml file

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 28

You are implementing a before plugin in MyCompany_Magic. It will intercept the same method that MyCompany_Admission is already intercepting using a before plugin: Topmenu::getBlockHtml

Which two actions are required to ensure the new plugin will execute last? (Choose two.)

- A. Add MyCompany_Admission as a dependency in MyCompany_Magic's etc/module.xml file
- B. Configure plugin sequencing for both plugins in MyCompany_Magic's etc/plugin_sequence.xml file
- C. Set a sortOrder="10" for MyCompany_Admission's plugin in MyCompany_Magic's etc/di.xml
- D. Include a sortOrder="20" on the new plugin in MyCompany_Magic's etc/di.xml file

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 29

A custom module must make changes to the schema following each setup:upgraderun. This must be done after all other module's schema updates have been applied.

How is this accomplished?

- A. Write a plugin intercepting \Magento\Setup\Model\Installer::handleDBSchemaData
- B. Create an UpgradeSchemaAfterclass which implements InstallSchemaInterface

- C. Update the module's setup_priority in etc/modules.xml
- D. Create a Recurring class which implements InstallSchemaInterface

Answer: D (LEAVE A REPLY)

Explanation/Reference: <https://www.pierrefay.com/magento2-training/install-upgrade-setup.html>

NEW QUESTION: 30

How do you persist an entity to the database?

- A. Calling the store() method on the entity's model
- B. Calling the save() method on the entity's repository
- C. Calling the update() method on the entity's collection
- D. Calling the persist() method on the entity's repository

Answer: (SHOW ANSWER)

NEW QUESTION: 31

You are adding an entry to the backend menu. To do so you open a core etc/adminhtml/menu.xml file as a reference. In the file you see the node:



What is the result of specifying resource="Magento_Catalog::catalog"?

- A. The menu item will only be visible to users who are assigned to a role with access to the matching ACL resource
- B. The menu item will only be visible if the class method specified by the resource returns a true value
- C. The last selected menu item for a user is stored in the DB so the previously visited page can be restored on the next login
- D. The resource is used to locate the correct translation for the attributes listed in title="..."

Answer: A (LEAVE A REPLY)

Explanation/Reference: <https://magento.stackexchange.com/questions/204879/consumer-is-not-authorized-to-access-resources-magento-2>

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPASS.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (105 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 32

A merchant requires the ability to configure contact information for their brick and mortar stores as a CSV file upload. The module already exists and contains an etc/adminhtml/system.xml file where the new field can be added.

How do you specify the class that will process the uploaded file?

- A. `<backend_model>\Magento\Config\Model\Config\Backend\File</backend_model>`
- B. `<upload_model>\Magento\Config\Model\Config\Upload\File</upload_model>`
- C. `<frontend_model>\Magento\Config\Model\Config\Frontend\File</frontend_model>`
- D. `<source_model>\Magento\Config\Model\Config\Source\File</source_model>`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 33

What order operation is available in the My Account section in the storefront?

- A. Refund
- B. Edit order
- C. Reorder
- D. Invoice

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 34

You are adding a new menu item to the admin backend which will link to a custom backend page.

The declaration of the route:

```
<router id="admin">
    <route id="mycompany" frontName="mycompany">
        <module name="MyCompany_MyModule"/>
    </route>
</router>
```

What do you specify as the menu item action attribute value so it links to /admin/mycompany/mymodule/?

- A. `action="mycompany/mymodule/"`
- B. `action="adminhtml/mycompany/mymodule/"`
- C. `action="admin/mycompany/mymodule/"`
- D. It is not possible without extending the adminhtml route in routes.xml

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 35

Which method of a Magento resource model will remove a record from the database?

- A. remove
- B. erase
- C. clean
- D. delete

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/123840/how-to-use-resource-model-delete?rq=1>

NEW QUESTION: 36

You are developing a module and need to add another column to a table introduced by another module MyCompany_MyModule via db schema.

How do you do that?

- A. Run a command: bin/magento setup:db-schema:upgrade <table> <column definition>
- B. Create a etc/db_schema.xml file in your module, add the column and run bin/magento setup:upgrade
- C. Create a etc/db.xml file in your module, add the column and run bin/magento setup:db-schema:upgrade
- D. Create a etc/db_schema_whitelist.json file in your module, add the column and run bin/magento setup:upgrade

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 37

What is a valid use case for an aroundplugin?

- A. The execution of the pluginized method must be suppressed
- B. The arguments of the beforeplugins must be modified
- C. The arguments of the afterplugins must be modified
- D. The execution of the beforeand afterplugins must be suppressed

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://devdocs.magento.com/guides/v2.3/extension-dev-guide/plugins.html>

NEW QUESTION: 38

You have been asked to display details from the customer's latest order on the customer's account dashboard (customer/account/). You create a new custom template to show the information.

How do you obtain an order repository so you can fetch an order?

- A. In your block, add a method with the following: `return ObjectManager::getInstance()->get(OrderRepositoryInterface::class);`
- B. In your template, add the following: `$orderRepository = new OrderRepository();`
- C. In your template, add the following: `$orderRepository=ObjectManager::getInstance()->get(OrderRepositoryInterface::class);`
- D. Create a view model and specify an OrderRepositoryInterface argument in the _construct method

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 39

A third-party module uses a layout update that changes the template path for a core block from product/view/addto/compare.phtml of the Magento_Catalog module to custom/view/addto/compare.phtml of your custom module. The merchant has a customized version of this template in their custom theme.

What is a consequence of this setup?

- A. If the custom module is removed, the custom template will no longer apply
- B. If a preference for the core block is set, the template will no longer apply

C. This setup will throw an `IllegalStateException`

D. If another module is installed which also customizes the same core template, the templates will be rendered sequentially

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 40

You are working on a new entity called vendor. You implemented the model, resource model and collection.

You want to ensure that standard model events will be fired for your model, so an observer can be created for the events `vendor_save_after`, `vendor_save_commit_after` and others.

How do you do that?

A. Declare the `$_eventPrefix` property in your vendor model and set it to vendor

B. Create an entry in `etc/di.xml` and add the argument `eventPrefix` with the value of vendor

C. You must implement all appropriate methods and fire the events manually

D. Ensure that the primary key in the corresponding table is named `vendor_id`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 41

The module `MyCompany_MyModule` will add a new page in the admin interface to display a custom entity in a grid.

You created a controller for this grid `\MyCompany\MyModule\Controller\Adminhtml\CustomEntity\Index` Which two actions are required to make the new page accessible at the

`https://your.store.base.url/admin/my_module/custom_entity` URL? (Choose two.)

A. Specify the `my_module/custom_entity` URL using a `@route` annotation in the action controller `execute()` method

B. Create a new menu item in `MyCompany/MyModule/etc/adminhtml/menu.xml`

C. Register `my_module` route for the AdminRouter in `MyCompany/MyModule/etc/adminhtml/di.xml`

D. Register `my_module` route in `MyCompany/MyModule/etc/adminhtml/routes.xml`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 42

Assume that a customer's cart only includes one downloadable product.

What effect will it cause on the quote object?

A. The quote object will have a downloadable URL instead of an address

B. The quote object will not have any address

C. The quote object will not have shipping address

D. The quote object will not have a billing address

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 43

In layout files you can change all element's order on a page. This can be done using one of the following:

`<move>` instruction

before and after element attributes?

How are two methods different?

- A. The move instruction allows altering an element's parent node
- B. They are the same, both provide access to the same functionality
- C. Before and after attributes can only be used with referenceContainer and referenceBlock
- D. Elements are renamed by default when using the move instruction

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 44

How do you add a new link into the My Account sidebar?

- A. By adding the new section into the customer_account table in the database
- B. By creating a child of the My Account UI component
- C. By creating a new UI component
- D. By using a layout update

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 45

A module declares the route:

```
<route id="mymodule" frontName="custom">
```

What is the layout handle of the storefront path /custom/feature/?

- A. custom_feature
- B. custom_feature_index
- C. mymodule_feature
- D. mymodule_feature_index

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 46

Magento allows you to specify custom values per store for product attributes created in the admin panel.

Which architectural pattern makes it possible?

- A. Store Manager
- B. Extension Attribute
- C. Entity Attribute Value
- D. Dependency Injection

Answer: B ([LEAVE A REPLY](#))

Explanation/Reference: <https://devdocs.magento.com/guides/v2.3/extension-dev-guide/attributes.html>

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-

Associate-Developer dumps with Test Engine here: <https://www.braindumps.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (105 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 47

You are building a report using complex SQL aggregations to locate the required data. In what type of class do you put these SQL statements?

- A. Model
- B. Helper
- C. Repository
- D. Resource model

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 48

You have been asked to display details from the customer's latest order on the customer's account dashboard (customer/account/). You create a new custom template to show the information. How do you obtain an order repository so you can fetch an order?

- A. In your template, add the following:
`$orderRepository = ObjectManager::getInstance()->get(OrderRepositoryInterface::class);`
- B. Create a view model and specify an OrderRepositoryInterface argument in the `_construct` method
- C. In your template, add the following:
`$orderRepository = new OrderRepository();`
- D. In your block, add a method with the following:
`return ObjectManager::getInstance()->get(OrderRepositoryInterface::class);`

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 49

The module `MyCompany_MyModule` provides custom admin interface pages. Access to these pages should only be granted to specific users. You add the required configuration to the module's `acl.xml` file, but the setting does not seem to work as expected. How do you visually check if Magento evaluates your ACL resource as expected?

- A. Inspect the response of a GET request to the webapi endpoint `http://example.com/rest/V1/acl/resources`
- B. Inspect the output of the CLI command `bin/magento admin:role:resources - all`
- C. In the browser, open the admin User Roles page. Choose a role and inspect the tree of available resources
- D. Write a plugin for the class `\Magento\Framework\Acl\LoaderInterface::populateAcl()` and echo out the loaded roles

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 50

What happens when a category's is_anchor attribute is set to 1?

- A. Products without a specified category will be associated with this category
- B. The customer will see all products from all children of the category
- C. The category will always be visible in the menu
- D. This is the default category for a website

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 51

The module MyCompany_MyModule provides custom admin interface pages.

Access to these pages should only be granted to specific users.

You add the required configuration to the module's acl.xml file, but the setting does not seem to work as expected.

How do you visually check if Magento evaluates your ACL resource as expected?

- A. Inspect

the response of a GET request to the webapi endpoint `http://example.com/rest/V1/acl/resources`

- B. Write a plugin for the class `\Magento\Framework\Acl\LoaderInterface::populateAcl()` and echo out the loaded roles

- C. In the browser, open the admin User Roles page. Choose a role and inspect the tree of available resources

- D. Inspect the output of the CLI command `bin/magento admin:role:resources - all`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 52

A module you are developing requires the addition of new routes that should be accessible in the store front.

Where do you define your module's frontName?

- A. `etc/frontend/routes.xml`
- B. `etc/frontend/config.xml`
- C. `etc/config.xml`
- D. `etc/routes.xml`

Answer: A ([LEAVE A REPLY](#))

Explanation/Reference: <https://devdocs.magento.com/guides/v2.3/extension-dev-guide/routing.html>

NEW QUESTION: 53

A merchant tasked you to add an input field for notes to the Customer Account Information backend page.

Which three actions do you specify in a module's Data Patch to add a customer notes attribute? (Choose three.)

- A. `$notesAttribute->setData('used_in_forms', ['adminhtml_customer']);`
- B. `$customerSetup->getConnection()->addColumn('customer_entity', 'notes', $columnSpecs);`
- C. `$customerSetup->addAttribute('customer', 'notes', $options);`
- D. `$customerSetup->addAttributeToSet('customer', $attributeSetIdCustomer, $groupId, 'notes');`
- E. `$cache->clean(['eav', 'db_ddl']);`

Answer: A,C,E ([LEAVE A REPLY](#))

NEW QUESTION: 54

You have created a custom module which must perform an action immediately after an order is placed, but only on the store front of the merchant site. You have selected the checkout_submit_all_after as the target event which the module will observe.

In which file will the event observer be declared?

- A. etc/frontend.xml
- B. etc/events.xml
- C. etc/frontend/events.xml
- D. etc/config.xml

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 55

While reviewing a layout file named sales_order_view.xml you notice the element
<update handle="customer_account"/>

What is the purpose of this element?

- A. Updates the current page handle to customer_account
- B. Replaces the customer_account handle with sales_order_view
- C. Nothing, this element has been deprecated
- D. Adds the customer_account handle to the page's handles list

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 56

How do you set the custom block MyCompany\MyModule\Block\A as a child for the block named product.info using layout XML?



The screenshot shows a question interface with four options labeled A, B, C, and D. Each option contains an XML snippet. A large, diagonal watermark reading 'exam-tests.com' is overlaid across the options. Option A shows a reference container with a child block. Option B shows a reference block with a child block. Option C shows a block with arguments, including a parent argument. Option D shows a block with a parent attribute.

```
A
<referenceContainer name="product.info">
    <block class="MyCompany\MyModule\Block\A" name="custom.block" />
</referenceContainer>

B
<referenceBlock name="product.info">
    <block class="MyCompany\MyModule\Block\A" name="custom.block" />
</referenceBlock>

C
<block class="MyCompany\MyModule\Block\A" name="custom.block" >
    <arguments>
        <argument name="parent" xsi:type="string">product.info</argument >
    </arguments>
</block>

D
<block class="MyCompany\MyModule\Block\A" name="custom.block" parent="product.info" />
```

- A. Option A
- B. Option B
- C. Option C

D. Option D

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 57

What is the connection between product attribute sets and categories?

- A. Categories have no connection to product attribute sets, and any product can be assigned to any category
- B. Each category is linked to a single product attribute set, and only products from that attribute set are allowed in the category
- C. Each category is linked to a single product attribute set, and only products from that category's set or any of its parent categories'
- D. Categories can be connected to multiple product attribute sets, and only products from one of those sets are allowed in the category

Answer: D ([LEAVE A REPLY](#))

Explanation/Reference: <https://www.cloudways.com/blog/configuring-product-attribute-sets-in-magento/>

NEW QUESTION: 58

You have added a new attribute origin of the type varchar to the product entity.

Which two calls will filter a product collection with origin set to "California"? (Choose two.)

- A. `$collection->addAttributeToSelect('origin', "California");`
- B. `$collection->joinAttribute('origin', 'catalog_product/origin', 'origin', 'California');`
- C. `$collection->addAttributeToFilter('origin', "California");`
- D. `$collection->addFieldToFilter('origin', "California");`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 59

You want to remove a column introduced by a third-party extension via declarative schema.

How do you do that?

- A. Modify the original `etc/db_schema.xml` file and remove the column from there
- B. Copy the `etc/db_schema.xml` file into your module and remove the column from your copy
- C. Create a `SchemaPatch` file and remove the column programmatically
- D. Create the `etc/db_schema.xml` file and specify `disable="true"` on the column

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 60

What is the connection between product attribute sets and categories?

- A. Categories can be connected to multiple product attribute sets, and only products from one of those sets are allowed in the category
- B. Each category is linked to a single product attribute set, and only products from that category's set or any of its parent categories'

C. Each category is linked to a single product attribute set, and only products from that attribute set are allowed in the category

D. Categories have no connection to product attribute sets, and any product can be assigned to any category

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 61

You have created a new block and will be adding this block on every page. The block contains user-specific information and cannot be cached. The block is added to the default.xml with:

```
<block class="MyCompany\MyModule\Block\Unique" name="unique"
cacheable="false" after="-">
```

What does this accomplish?

A. The block will be loaded on the store front using AJAX

B. FPC will be bypassed for this block and all other page content will be cached

C. FPC will cache the block content for all cacheable pages

D. All store front pages are no longer cacheable

Answer: D ([LEAVE A REPLY](#))

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPass.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (105 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 62

How many shipping addresses may be selected for an order during the checkout process?

A. Only one shipping address per order is possible

B. One shipping addresses per unit of quantity is possible

C. One shipping address per line item is possible

D. One shipping address per product type is possible

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 63

You are working on a Magento store which will be selling in two countries. Each country has its own set of payment methods.

How do you organize the project to support this requirement?

A. Create one website, two payment scopes

- B. Create one website, one store view
- C. Create one website, two store views
- D. Create two websites, two store views

Answer: A ([LEAVE A REPLY](#))

Explanation

NEW QUESTION: 64

You want to declare a block of the type \Magento\Framework\View\Element\Template with a template named view.phtml in the layout XML.

What is the correct layout declaration for this?



The screenshot shows a question interface with four options (A, B, C, D) for declaring a block in layout XML. A large, semi-transparent watermark 'exam-tests.com' is overlaid diagonally across the options. Option A is the correct answer.

A

```
<block class="Magento\Framework\View\Element\Template" name="myblock" template="view.phtml" scope="MyCompany_MyModule" />
```

B

```
<container module="MyCompany_MyModule">
    <block class="Magento\Framework\View\Element\Template" name="myblock"
    template="view.phtml" />
</container>
```

C

```
<block class="Magento\Framework\View\Element\Template" name="myblock"
template="MyCompany/MyModule/view/frontend/templates/view.phtml" />
```

D

```
<block class="Magento\Framework\View\Element\Template" name="myblock"
template="MyCompany_MyModule::view.phtml" />
```

- A. Option B
- B. Option D
- C. Option A
- D. Option C

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 65

You added a new constructor argument to an existing action controller class.

When you reload the page you get a PHP error that the wrong argument is passed to the class.

How do you fix this?

- A. Clean the <magento_root>/generated/ folder
- B. Clean the config cache
- C. Clean the page cache
- D. Deploy static content

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 66

You have created a new block and will be adding this block on every page. The block contains user-specific information and cannot be cached. The block is added to the default.xml with:

```
<block class="MyCompany\MyModule\Block\Unique" name="unique"
cacheable="false" after="-">
```

What does this accomplish?

- A. FPC will cache the block content for all cacheable pages
- B. FPC will be bypassed for this block and all other page content will be cached
- C. The block will be loaded on the store front using AJAX
- D. All store front pages are no longer cacheable

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 67

How do you add a new link into the My Account sidebar?

- A. By creating a new UI component
- B. By creating a child of the My Account UI component
- C. By adding the new section into the customer_account table in the database
- D. By using a layout update

Answer: C ([LEAVE A REPLY](#))

Explanation/Reference: <https://webkul.com/blog/account-navigation-link-magento2/>

NEW QUESTION: 68

How do you obtain customer information in a JavaScript module?

- A. Magento does not expose customer information in JavaScript for security reasons
- B. By sending an AJAX request to the url: /customer/account/info/?json=1
- C. By using customerData.get('customer') call, where customerData is an instance of Magento_Customer/js/customer-data
- D. Customer information is available in localStorage and be retrieved by calling window.localStorage.getItem('customer')

Answer: (SHOW ANSWER)

Explanation/Reference: <https://belvg.com/blog/customer-data-management-in-magento-2.html>

NEW QUESTION: 69

A merchant asks you to extend customer functionality to allow customer accounts to be associated with two or more billing addresses.


How is this implemented?

- A. This is out-of-the box functionality
- B. By changing the System Configuration setting: Customer>Allow multiple billing addresses to Yes
- C. By adding the attribute like customer_address_billing2 and customizing both My Account and Checkout functionality to use that new attribute
- D. By altering the customer_entity table, adding the field billing_address2, and customizing both My Account and Checkout functionality to use that new field

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 70

You are adding an entry to the backend menu. To do so you open a core etc/adminhtml/menu.xml file as a reference. In the file you see the node:

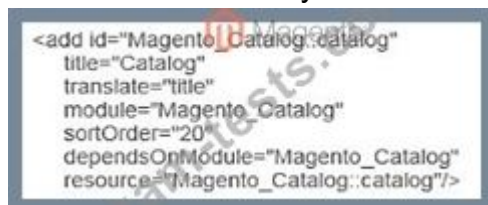

```
<add id="Magento_Catalog::catalog"
    title="Catalog"
    translate="title"
    module="Magento_Catalog"
    sortOrder="20"
    dependsOnModule="Magento_Catalog"
    resource="Magento_Catalog::catalog"/>
```

What is the result of specifying resource="Magento_Catalog::catalog"?

- A. The menu item will only be visible to users who are assigned to a role with access to the matching ACL resource
- B. The last selected menu item for a user is stored in the DB so the previously visited page can be restored on the next login
- C. The menu item will only be visible if the class method specified by the resource returns a true value
- D. The resource is used to locate the correct translation for the attributes listed in title="..."

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 71

A third-party module uses a layout update that changes the template path for a core block from product/view/addto/compare.phtml of the Magento_Catalog module to custom/view/addto/compare.phtml of your custom module. The merchant has a customized version of this template in their custom theme.

What is a consequence of this setup?

- A. If the custom module is removed, the custom template will no longer apply
- B. This setup will throw an IllegalStateException
- C. If a preference for the core block is set, the template will no longer apply
- D. If another module is installed which also customizes the same core template, the templates will be rendered sequentially

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/259547/how-to-a-third-party-module-uses-a-layout-update-that-changes-the-template-path>

NEW QUESTION: 72

You are tasked with ensuring customers who log into the site are authorized. By default, this consists of ensuring the customers email and password match the values in the database. On this project, you need to verify additional data in this process.

Keeping in mind upgradeability, how is this done?

- A. Create an event observer for the user_save_after observer
- B. Create a before plugin for \Magento\Customer\Api\AccountManagementInterface's authenticate method

- C. Override \Magento\Customer\Controller\AccountController.php
- D. Create a mutation of a CustomerInterface object to intercept the username and password

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 73

Assume that \$collection is a new instance of a class that extends Magento\Framework\Model\ResourceModel\Db\Collection\AbstractCollection, and \$ids is an array of ids. How do you select a list of records from the database where the record ids are in the \$ids list?

- A. \$collection->addFieldToFilter('record_id', ['in'=>\$ids]);



```
$collection->addFieldToFilter($filterBuilder  
    ->setType('in')  
    ->setValue($ids)  
    ->create()  
);  
// where $filterBuilder is an instance of a \Magento\Framework\Api\FilterBuilder class.
```

- B.
- C. \$collection->in(\$ids);
- D. \$collection->filterIn(\$ids);

Answer: A ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/121040/how-to-get-product-collections-by-set-of-ids-in-magento-2>

NEW QUESTION: 74

How many shipping addresses may be selected for an order during the checkout process?

- A. One shipping address per line item is possible
- B. Only one shipping address per order is possible
- C. One shipping address per unit of quantity is possible
- D. One shipping address per product type is possible

Answer: (SHOW ANSWER)

Explanation/Reference: https://docs.magento.com/m2/ce/user_guide/sales/checkout-step1-shipping.html

NEW QUESTION: 75

You are tasked to install an extension to the merchant's Magento instance.

The extension is developed by the company called MyCompany and its codebase is available from all four locations listed below.

Which two installations options do you choose from to prevent version conflicts during upgrade? (Choose two.)

- A. Download the extension code from the developer's website, and put it into app/code
- B. Use Magento web setup wizard to pull the code from Magento's composer repository
- C. Clone the code from GitHub and put it into the vendor directory
- D. Use composer CLI to pull the code from MyCompany's repository

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 76

What is the connection between product attribute sets and categories?

- A. Categories have no connection to product attribute sets, and any product can be assigned to any category
- B. Each category is linked to a single product attribute set, and only products from that attribute set are allowed in the category
- C. Each category is linked to a single product attribute set, and only products from that category's set or any of its parent categories'
- D. Categories can be connected to multiple product attribute sets, and only products from one of those sets are allowed in the category

Answer: D (LEAVE A REPLY)

Explanation/Reference: <https://www.cloudways.com/blog/configuring-product-attribute-sets-in-magento/>

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPASS.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (**105 Q&As Dumps, 40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 77

The constructor function for \Magento\Catalog\Model\Category contains this excerpt:

```
public function __construct(  
    // ...  
    \Magento\Store\Model\StoreManagerInterface $storeManager  
    // ...  
) { /* ... */ }
```

With the automatic dependency injection that Magento provides, how is the StoreManagerInterface resolved?

- A. If no \$storeManager is provided, Magento's code generator creates a shell concrete class based on \Magento\Store\Model\StoreManagerInterface
- B. Magento finds all classes that implement \Magento\Store\Model\StoreManagerInterface (ordered alphabetically) and injects the first class.
- C. Magento looks to the di.xml files in the entire system for a preference node for \Magento\Store\Model\StoreManagerInterface. This class is constructed and injected
- D. Magento throws an exception because you cannot instantiate an interface

Answer: C (LEAVE A REPLY)

Explanation

<https://devdocs.magento.com/guides/v2.4/extension-dev-guide/depend-inj.html>

NEW QUESTION: 78

Magento 2's architecture uses code to bootstrap a custom module that resides in app/code.

What two files are required to make a module usable? (Choose two.)

- A. etc/module.xml
- B. registration.php
- C. Helper/Data.php
- D. etc/config.xml

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 79

In a code review of a merchant's site you have discovered that there are multiple observers for the checkout_submit_all_after event. After closer inspection, you notice one of these observers is relying on the others being executed before it is called.

What risk does this pose, and how can it be mitigated?

- A. There is no risk posed as long as each event observer specifies a correct sortOrder. Nothing needs to be changed.
- B. Event observers are fired in alphabetical order of the observer name. There is no risk here.
- C. Magento only supports one observer per event. These observers will need to be combined into a single point of customization.
- D. Order of listener execution cannot be guaranteed, resulting in a fragile implementation. This code should be re-worked using plugins

Answer: B ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/373/magento-observer-events-order-of-operations>

NEW QUESTION: 80

You have configured an event observer to watch the checkout_submit_all_after event using this XML:

```
<event name="checkout_submit_all_after">
  <observer name="exampleObserver" instance="MyCompany\MyModule\Observer\CheckoutObserver" />
</event>
```

What is the required class definition for the event observer?

```
A
class CheckoutObserver
{
    public function exampleObserver(Event\Observer $observer) { /* observer code */ }
}

B
class CheckoutObserver implements Event\ObserverInterface
{
    public function execute(Event\Observer $observer) { /* observer code */ }
}

C
class CheckoutObserver extends Event\ObserverAbstract
{
    public function execute(Event\Observer $observer) { /* observer code */ }
}

D
class CheckoutObserver implements Event\ObserverInterface
{
    public function exampleObserver(Event\Observer $observer) { /* observer code */ }
}
```

A. Option C

B. Option D

C. Option B

D. Option A

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 81

You have to install a new module on the production environment. All the module is adding a new product attribute. You enabled maintenance mode, copied the module code, run bin/magento setup:upgrade and disabled maintenance mode.

What two risks does this process pose? (Choose two.)

A. The new attribute will be invisible on the storefront until the cache is cleaned manually

B. It will clean static assets from the pub/static folder

C. It will clean all caches which will cause a performance degradation

D. It will void all active sessions

Answer: A,D ([LEAVE A REPLY](#))

NEW QUESTION: 82

A merchant requires the ability to configure contact information for their brick and mortar stores as a CSV file upload. The module already exists and contains an etc/adminhtml/system.xml file where the new field can be added.

How do you specify the class that will process the uploaded file?

A. <upload_model>\Magento\Config\Model\Config\Upload\File</upload_model>

- B. <frontend_model>\Magento\Config\Model\Config\Frontend\File</frontend_model>
- C. <backend_model>\Magento\Config\Model\Config\Backend\File</backend_model>
- D. <source_model>\Magento\Config\Model\Config\Source\File</source_model>

Answer: C ([LEAVE A REPLY](#))

Explanation/Reference: <https://www.magestore.com/magento-2-tutorial/file-upload-in-magento-2-store-configuration/>

NEW QUESTION: 83

The module MyCompany_MyModule will add a new page in the admin interface to display a custom entity in a grid. You created a controller for this grid \MyCompany\MyModule\Controller\Adminhtml\CustomEntity\Index Which two actions are required to make the new page accessible at the https://your.store.base.url/admin/my_module/custom_entity URL? (Choose two.)

- A. Register my_module route in MyCompany/MyModule/etc/adminhtml/routes.xml
- B. Register my_module route for the AdminRouter in MyCompany/MyModule/etc/adminhtml/di.xml
- C. Specify the my_module/custom_entity URL using a @route annotation in the action controller execute() method
- D. Create a new menu item in MyCompany/MyModule/etc/adminhtml/menu.xml

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 84

In the module located at app/code/MyCompany/MyModule there is a JS module in the file view/frontend/web/register.js. The Magento base URL is <https://magento.host/> and the luma theme with the en_US locale is used.

What is the public URL for this file?

- A. https://magento.host/pub/static/frontend/Magento/luma/en_US/MyCompany_MyModule/web/register.js
- B. https://magento.host/pub/static/frontend//Magento/luma/en_US/MyCompany_MyModule/js/register.js
- C. https://magento.host/app/code/MyCompany_MyModule/view/frontend/web/register.js
- D. https://magento.host/pub/static/frontend/Magento/luma/en_US/MyCompany_MyModule/register.js

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 85

You need to find all orders in the processing state. You have written the code:

```
$orderRepository->getList($searchCriteriaBuilder->addFilter('state', 'processing'));
```

When you run the code, you get the following exception:

```
Uncaught TypeError: Argument 1 passed to Magento\Sales\Model\OrderRepository::getList() must be an instance of Magento\Framework\Api\SearchCriteriaInterface, instance of Magento\Framework\Api\SearchCriteriaBuilder given.
```

How do you resolve the exception?

- A. Specify a preference in di.xml to map SearchCriteriaBuilder to SearchCriteriaInterface
- B. Use dependency injection to load an instance of the SearchCriteria class
- C. Change the getList parameter to: \$searchCriteriaBuilder->addFilter('state', 'processing')->create()
- D. Clear generated code to get a new version of SearchCriteriaBuilder

Answer: ([SHOW ANSWER](#))

Explanation/Reference:

NEW QUESTION: 86

What scopes are available for customer attributes?

- A. Global only
- B. Website only
- C. Global and Website
- D. Global, Website and Store

Answer: A ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/258212/which-entity-allows-scoped-attributes>

NEW QUESTION: 87

How can you render a text on a page using only layout xml?

A

```
<block class="Magento\Framework\View\Element\Template" name="myblock" text="TEXT TO RENDER" />
```

B

```
<block class="Magento\Framework\View\Element\ListText" name="myblock">
  <arguments>
    <argument name="items" xsi:type="array">
      <item>TEXT TO RENDER</item>
    </argument>
  </arguments>
</block>
```

C

```
<block class="Magento\Framework\View\Element\Text" name="myblock">
  <arguments>
    <argument name="text" xsi:type="string">TEXT TO RENDER</argument>
  </arguments>
</block>
```

D

```
<block class="Magento\Framework\View\Element\Messages" name="myblock">
  <arguments>
    <argument name="messages" xsi:type="array">
      <item>TEXT TO RENDER</item>
    </argument>
  </arguments>
</block>
```

- A. Option C
- B. Option D
- C. Option B
- D. Option A

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 88

What are two functions of a resource model? (Choose two.)

- A. It executes create, retrieve, update and delete actions for an entity
- B. It maps an entity to one or more database rows

- C. It loads lists of entity models
- D. It is made available in the Magento API for the purpose of data manipulation

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 89

The constructor function for \Magento\Catalog\Model\Category contains this excerpt:

```
public function __construct(  
    // ...  
    \Magento\Store\Model\StoreManagerInterface $storeManager  
    // ...  
) { /* ... */ }
```

With the automatic dependency injection that Magento provides, how is the StoreManagerInterface resolved?

- A. Magento throws an exception because you cannot instantiate an interface
- B. Magento finds all classes that implement \Magento\Store\Model\StoreManagerInterface (ordered alphabetically) and injects the first class.
- C. If no \$storeManager is provided, Magento's code generator creates a shell concrete class based on \Magento\Store\Model\StoreManagerInterface
- D. Magento looks to the di.xml files in the entire system for a preference node for \Magento\Store\Model\StoreManagerInterface. This class is constructed and injected

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 90

A client has asked you to include category url keys in product URLs.

How is this done?

- A. Create an after plugin on \Magento\UrlRewrite\Controller\Router::generateRewrite
- B. Set the configuration value of catalog/seo/product_use_categories to Yes
- C. This is not possible because products can belong to multiple categories
- D. Create an observer for controller_action_postdispatch_catalog_product_view

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 91

Which two tasks are supported by Magento CLI? (Choose two.)

- A. Administrator account creation
- B. Clearing cache
- C. Customer password reset
- D. Codebase deployment from developer machine to staging server

Answer: A,B ([LEAVE A REPLY](#))

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-**

Developer exam dumps, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPass.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (105 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 92

In layout files you can change al element's order on a page. This can be done using one of the following:

* <move> instruction

* before and after element attributes?

How are two methods different?

- A. They are the same, both provide access to the same functionality
- B. Elements are renamed by default when using the move instruction
- C. Before and after attributes can only be used with referenceContainer and referenceBlock
- D. The move instruction allows altering an element's parent node

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 93

What is the connection between product attribute sets and categories?

- A. Each category is linked to a single product attribute set, and only products from that category's set or any of its parent categories'
- B. Each category is linked to a single product attribute set, and only products from that attribute set are allowed in the category
- C. Categories can be connected to multiple product attribute sets, and only products from one of those sets are allowed in the category
- D. Categories have no connection to product attribute sets, and any product can be assigned to any category

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 94

You have been asked to display details from the customer's latest order on the customer's account dashboard (customer/account/). You create a new custom template to show the information.

How do you obtain an order repository so you can fetch an order?

- A. In your block, add a method with the following:
return
ObjectManager::getInstance()->get(OrderRepositoryInterface::class);
- B. Create a view model and specify an OrderRepositoryInterface argument in the _construct method
- C. In your template, add the following:\$orderRepository = new OrderRepository();
- D. In your template, add the
following:\$orderRepository=ObjectManager::getInstance()->get(OrderRepositoryInterface::class);

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 95

What is the relationship between products and categories in Magento?

- A. Products may be assigned to zero or more categories
- B. Product to category relation is dynamically defined by Catalog Product Rules
- C. Each product belongs to zero or one category
- D. Each product always belongs to one category

Answer: A ([LEAVE A REPLY](#))


Explanation/Reference:

NEW QUESTION: 96

You are adding a new entry to the backend menu that appears after

Marketing > SEO & Search > Site Map

You see the existing site map menu item is declared by the node:



What two actions do you take to configure the new menu entry location? (Choose two.)

- A. Specify parent="Magento_Backend::marketing_seo"
- B. Specify sortOrder="100"
- C. Specify item XML in the file etc/adminhtml/menu/marketing/seo/menu.xml
- D. Specify parent="Magento_Sitemap::catalog_sitemap"

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 97

Which entity in Magento supports scoped attributes?

- A. Customer
- B. CMS Page
- C. Category
- D. Customer Address

Answer: C ([LEAVE A REPLY](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/258212/which-entity-allows-scoped-attributes>

NEW QUESTION: 98

A Magento industry partner shipping provider has tasked you to build their integration module called MyCompany_ShippingProvider.

Where do you define the class that provides options for the select field that enables or disables the provider in the file etc/adminhtml/system.xml?

- A. `<option_model>Magento\Config\Model\Config\Option\Yesno</option_model>`
- B. `<source_model>Magento\Config\Model\Config\Source\Yesno</source_model>`

C. <frontend_model>Magento\Config\Model\Config\Frontend\Yesno</frontend_model>

D. <backend_model>Magento\Config\Model\Config\Backend\Yesno</backend_model>

Answer: B (LEAVE A REPLY)

Explanation/Reference: <https://devdocs.magento.com/guides/v2.3/howdoi/checkout/checkout-add-custom-carrier.html>

NEW QUESTION: 99

The module MyCompany_MyModule will add a new page to the admin interface at the URL path admin/mycompany/entity_grid.

How do you name the file containing the action controller class so the admin router matches the path to the class?

A. Controller/Adminhtml/Mycompany/Entity/Grid.php

B. Controller/Adminhtml/Mycompany/Entity_Grid.php

C. Controller/Adminhtml/Entity/Grid.php

D. Controller/Adminhtml/Entity/Grid/Index.php

Answer: B (LEAVE A REPLY)

NEW QUESTION: 100

You are reviewing a Magento module and see a directory named Service.

What can you determine from this directory's name?

A. It is where the API response cache is stored

B. It is where API-related configuration resides

C. It is where the module's service contracts are stored

D. You need to review the files in this folder to understand its purpose

Answer: D (LEAVE A REPLY)

Explanation/Reference: <https://stackoverflow.com/questions/55337322/what-is-the-use-of-service-directory-in-magento-2>

NEW QUESTION: 101

Assume that \$collection is a new instance of a class that extends

Magento\Framework\Model\ResourceModel\Db\Collection\AbstractCollection, and \$ids is an array of ids.

How do you select a list of records from the database where the record ids are in the \$ids list?

A `$collection->addFieldToFilter('record_id', ['in'=>$ids]);`

B

```
    $collection->addFilter($filterBuilder
        ->setType('in')
        ->setValue($ids)
        ->create()
    );
```

where \$filterBuilder is an instance of a Magento\Framework\Api\FilterBuilder class.

C `$collection->in($ids);`

D `$collection->filterIn($ids);`



A. Option B

- B. Option D
- C. Option C
- D. Option A

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 102

During a code review of a module MyCompany_PaymentCurrencies you see a configuration field declared in the file etc/adminhtml/system.xml:

```
<field id="currency" type="select" showInDefault="1" showInWebsite="1" showInStore="0">  
    ...  
</field>
```

What is the consequence of the attribute showInStore being set to 0?

- A. The input field will be disabled if a store view scope is selected in the system configuration
- B. The input field will not be visible if a store view scope is selected in the system configuration
- C. The field value will not be accessible on the store front by calling ScopeConfigInterface::getValue() with a \$scopeType argument of 'store'.
- D. The input field will only be visible if a website's default store scope is selected in the system configuration

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 103

You are setting up a brand new Magento installation for a merchant who is migrating from Magento 1 to Magento 2. Keeping in mind upgradability and the need to customize, which one do you choose?

- A. Create a new Magento instance by using the bin/magento install command
- B. Clone the magento/magento2 GitHub repository
- C. Create a new Magento instance using composer create-project
- D. Run php bin/magento setup:migrate <path-to-m1-installation> <new-version> command

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 104

\Magento\Sales\Model\Api\OrderRepositoryInterface::getList accepts a SearchCriteriaInterface to filter and sort information.

What class assists in creating an instance for SearchCriteriaInterface?

- A. \Magento\Framework\Api\SearchCriteriaFactory
- B. \Magento\Framework\Api\SearchCriteriaBuilder
- C. \Magento\Sales\Model\Order\SearchCriteria
- D. \Magento\Backend\Api\SearchCriteriaGenerator

Answer: ([SHOW ANSWER](#)**)**

Explanation/Reference: <https://github.com/magento/magento2/blob/2.3/lib/internal/Magento/Framework/Api/SearchCriteriaInterface.php>

NEW QUESTION: 105

In a code review of a merchant's site you have discovered that there are multiple observers for the checkout_submit_all_after event. After closer inspection, you notice one of these observers is relying on the others being executed before it is called.

What risk does this pose, and how can it be mitigated?

- A.** There is no risk posed as long as each event observer specifies a correct sortOrder. Nothing needs to be changed.
- B.** Event observers are fired in alphabetical order of the observer name. There is no risk here.
- C.** Magento only supports one observer per event. These observers will need to be combined into a single point of customization.
- D.** Order of listener execution cannot be guaranteed, resulting in a fragile implementation. This code should be re-worked using plugins

Answer: ([SHOW ANSWER](#))

Explanation/Reference: <https://magento.stackexchange.com/questions/373/magento-observer-events-order-of-operations>

NEW QUESTION: 106

What happens when a category's is_anchor attribute is set to 1?

- A.** The customer will see all products from all children of the category
- B.** Products without a specified category will be associated with this category
- C.** This is the default category for a website
- D.** The category will always be visible in the menu

Answer: A ([LEAVE A REPLY](#))

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpsPASS.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (**105 Q&As Dumps, 40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 107

You have loaded an instance of Magento\Catalog\Model\Product in the \$product variable. You know that the loaded product has the type configurable with four variations. These variations have the prices: \$10, \$12, \$12, \$15.

What will be the result of the \$product->getFinalPrice() call?

- A.** [10, 12, 12, 15]
- B.** [10, 12, 15]
- C.** 15

D. 10

Answer: D ([LEAVE A REPLY](#))

Valid Magento-2-Associate-Developer Dumps shared by BraindumpsPass.com for Helping Passing Magento-2-Associate-Developer Exam! BraindumpsPass.com now offer the **newest Magento-2-Associate-Developer exam dumps**, the BraindumpsPass.com Magento-2-Associate-Developer exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com Magento-2-Associate-Developer dumps with Test Engine here: <https://www.braindumpspass.com/Magento/Magento-2-Associate-Developer-practice-exam-dumps.html> (**105** Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)