

Salesforce.TVB-450.v2025-07-24.q105

Exam Code:	TVB-450
Exam Name:	Trailhead Virtual Bootcamp for Platform Developer I
Certification Provider:	Salesforce
Free Question Number:	105
Version:	v2025-07-24
# of views:	111
# of Questions views:	1050
https://www.exam-tests.com/TVB-450-exam/Salesforce.TVB-450.v2025-07-24.q105.html	

NEW QUESTION: 1

What are three characteristics of change set deployments?

Choose 3 answers

- A. Change sets can only be used between related organizations.
- B. Change sets can deploy custom settings data.
- C. Deployment is done in a one-way, single transaction.
- D. Change sets can be used to transfer records.
- E. Sending a change set between two orgs requires a deployment connection.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 2

A developer creates a Lightning web component that imports a method within an Apex class. When a Validate button is pressed, the method runs to execute complex validations.

In this implementation scenario, which artifact is part of the Controller according to the MVC architecture?

- A. HTML file
- B. XML file
- C. Apex class
- D. JavaScript file

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 3

A developer must implement a CheckPaymentProcessor class that provides check processing payment capabilities that adhere to what defined for payments in the PaymentProcessor interface. `public interface PaymentProcessor { void pay(Decimal amount); }` Which is the correct implementation to use the PaymentProcessor interface class?

- A. `Public class CheckPaymentProcessor extends PaymentProcessor {`

```
public void pay(Decimal amount);
}
```

B. Public class CheckPaymentProcessor implements PaymentProcessor {
public void pay(Decimal amount);
}

C. Public class CheckPaymentProcessor implements PaymentProcessor {
public void pay(Decimal amount) {}
}

D. Public class CheckPaymentProcessor extends PaymentProcessor {
public void pay(Decimal amount) {}
}

Answer: B (LEAVE A REPLY)

NEW QUESTION: 4

Which three statements are true regarding trace flags? (Choose three.)

- A.** If active trace flags are not set, Apex tests execute with default logging levels.
- B.** Trace flags can be set in the Developer Console, Setup, or using the Tooling API.
- C.** Logging levels override trace flags.
- D.** Trace flags override logging levels.
- E.** Setting trace flags automatically cause debug logs to be generated.

Answer: A,B,D (LEAVE A REPLY)

NEW QUESTION: 5

Refer to the following code snippet for an environment has more than 200 Accounts belonging to the Technology' industry:

```
for(Account thisAccount : [Select Id, Industry FROM Account LIMIT 150]){
    if(thisAccount.Industry == 'Technology'){
        thisAccount.Is_Tech__c = true;
    }
    update thisAccount;
}
```

When the code execution, which two events occur as a result of the Apex transaction?

When the code executes, which two events occur as a result of the Apex transaction?

Choose 2 answers

- A.** The Apex transaction succeeds regardless of any uncaught exception and all processed accounts are updated.
- B.** If executed in an asynchronous context, the apex transaction is likely to fail by exceeding the DML governor limit
- C.** The Apex transaction fails with the following message. "SObject row was retrieved via SOQL without querying the requested field Account.Is.Tech__c".
- D.** If executed In a synchronous context, the apex transaction is likely to fail by exceeding the DHL governor limit.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 6

Which action causes a before trigger to fire by default for Accounts?

- A. Renaming or replacing picklist
- B. Converting Leads to Contact accounts
- C. Importing data using the Data Loader and the Bulk API
- D. Updating addresses using the Mass Address update tool

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 7

Consider the following code snippet:

```
public static List<Lead> obtainAllFields(Set<Id> leadIds) {
    List<Lead> result = new List<Lead>();
    for(Id leadId : leadIds){
        result.add([SELECT FIELDS(ALL) FROM Lead WHERE Id = :leadId]);
    }
    return result;
}
```



Given the multi-tenant architecture of the Salesforce platform, what is a best practice a developer should implement and ensure successful execution of the method?

- A. Avoid using variables as query filters.
- B. Avoid performing queries inside for loops.
- C. Avoid returning an empty List of records.
- D. Avoid executing queries without a limit clause.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 8

A Salesforce Administrator used Flow Builder to create a flow named "accountOnboarding". The flow must be used inside an Aura component.

Which tag should a developer use to display the flow in the component?

- A. Lightning:flow
- B. Lightning-flow
- C. Aura:flow
- D. Aura:flow

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 9

When a user edits the Postal Code on an Account, a custom Account text field named "Timezone" must be updated based on the values in a postalCodeToTimezone_c custom object. What should be built to implement this feature?

- A. Account approval process
- B. Account workflow rule
- C. Account assignment rule
- D. Account custom trigger

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 10

What is an example of a polymorphic lookup field in Salesforce?

- A. The WhatId field on the standard Event object
- B. A custom field, Link__c, on the standard Contact object that looks up to an Account or a Campaign
- C. The ParentId field on the standard Account object
- D. The LeadId and ContactId fields on the standard Campaign Member object

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 11

What are two ways for a developer to execute tests in an org?

- A. Metadata API
- B. Bulk API
- C. Tooling API
- D. Developer console

Answer: C,D ([LEAVE A REPLY](#))

NEW QUESTION: 12

When a user edits the Postal Code on an Account, a custom Account text field named "Timezone" must be update based on the values in a PostalCodeToTimezone__c custom object. How should a developer implement this feature?

- A. Build an Account Assignment Rule.
- B. Build an Account Workflow Rule.
- C. Build an Account custom Trigger.
- D. Build an account Approval Process

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 13

A team of many developers work in their own individual orgs that have the same configuration at the production org. Which type of org is best suited for this scenario?

- A. Developer Edition
- B. Full Sandbox
- C. Developer Sandbox
- D. Partner Developer Edition

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 14

Which Lightning code segment should be written to declare dependencies on a Lightning component, c:accountList, that is used in a Visualforce page?

A)

```
<aura:application access="GLOBAL" extends="ltng:outApp">
    <aura:dependency resource="c:accountList"/>
</aura:application>
```

B)

```
<aura:component access="GLOBAL" extends="ltng:outApp">
    <aura:dependency resource="c:accountList"/>
</aura:component>
```

C)

```
<aura:component access="GLOBAL">
    <aura:dependency resource="c:accountList"/>
</aura:component>
```

D)

```
<aura:application access="GLOBAL">
    <aura:dependency resource="c:accountList"/>
</aura:application>
```

A. Option B

B. Option C

C. Option A

D. Option D

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 15

A lead developer creates an Apex interface called "Laptop". Consider the following code snippet:

```
public class SilverLaptop{
    //code implementation
}
```

How can a developer use the Laptop Interface within the Silverlaptop class?

A. public class Silverlaptop implements Laptop

B. @Extends(class=Laptop")

public class SilverLaptop

C. public calss SilverLaptop extends Laptop

D. @Interface (class="Laptop")

public class SilverLaptop

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 16

Refer to the following Apex code:

```
Integer x = 0;
do {
    x = 1;
    x++;
} while (x < 1);
System.debug(x);
```

What is the value of x when it is written to the debug log?

- A. 2
- B. 0
- C. 3
- D. 1

Answer: A ([LEAVE A REPLY](#))

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here: <https://www.braindumps.com/Salesforce/TVB-450-practice-exam-dumps.html> (151 Q&As Dumps, **40%OFF** Special Discount: **Exam-Tests**)

NEW QUESTION: 17

Given the following Anonymous Block:

```
When the following Anonymous Block:
List<Case> casesToUpdate = new List<Case>();
for(Case thisCase : [Select Id, Status FROM Case LIMIT 50000]){
    thisCase.Status = 'Working';
    casesToUpdate.add(thisCase);
}
try{
    Database.update(casesToUpdate, false);
}catch(Exception e){
    System.debug(e.getMessage());
}
```

Which one do you like?

What should a developer consider for an environment that has over 10,000 Case records?

- A. The transaction will fail due to exceeding the governor limit.
- B. The try/catch block will handle exceptions thrown by governor limits.
- C. The try/catch block will handle any DML exceptions thrown.
- D. The transaction will succeed and changes will be committed.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 18

Which annotation exposes an Apex class as a RESTful web service?

- A. HttpInvocable
- B. RestResource
- C. AuraEnabled
- D. Remote Action

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 19

Refer to the following code that runs in an Execute Anonymous block:

```
for(listlead> theseLeads : [SELECT LastName, Company, Email FROM Lead LIMIT 20000]){
  for(lead thislead : theseLeads){
    if(thislead.Email == null)
      thislead.Email = assignGenericEmail(thisLead.LastName, thislead.Company);
  }
  Database.Update(theseLeads,false);
}
```

In an environment where the full result set is returned, what is a possible outcome of this code?

- A. The transaction will succeed and the first ten thousand records will be committed to the database.
- B. The total number of records processed as a result of DML statements will be exceeded.
- C. The total number of records processed as a result of DML statements will be exceeded
- D. The total number of DML statements will be exceeded.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 20

A developer migrated functionality from JavaScript Remoting to a Lightning web component and wants to use the existing getOpportunities() method to provide data.

What to do now?

- A. The method must return a JSON Object.
- B. The method must return a String of a serialized JSON Array.
- C. The method must be decorated with @AuraEnabled.
- D. The method must be decorated with (cacheable=true).

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 21

Given the code below:

```
List<Account> aList = [SELECT Id FROM Account];
for (Account a : aList){
  List<Contact> cList = [SELECT Id FROM Contact WHERE AccountId = :a.Id];
}
```

salesforce

What should a developer do to correct the code so that there is no chance of hitting a governor limit?

- A. combine the two SELECT statements into a single SOQL statement.

- B. Add a LIMIT clause to the first SELECT SOQL statement.
- C. Rework the code and eliminate the for loop.
- D. Add a WHERE clause to the first SELECT SOQL statement.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 22

The Job_Application__c custom object has a field that is a Master-Detail relationship to the Contact object, where the Contact object is the Master. As part of a feature implementation, a developer needs to retrieve a list containing all Contact records where the related Account Industry is 'Technology' while also retrieving the contact's Job_Application__c records. Based on the object's relationships, what is the most efficient statement to retrieve the list of contacts?

- A. [SELECT Id, (SELECT Id FROM Job_Applications_r) FROM Contact WHERE Account.Industry = 'Technology'];
- B. [SELECT Id, (SELECT Id FROM Job_Applications_c) FROM Contact WHERE Accounts.Industry = 'Technology'];
- C. [SELECT Id, (SELECT Id FROM Job_Applications_r) FROM Contact WHERE Accounts.Industry = 'Technology'];
- D. [SELECT Id, (SELECT Id FROM Job_Application_c) FROM Contact WHERE Account.Industry = 'Technology'];

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 23

A developer is debugging the following code to determine why Accounts are not being created Account a = new Account(Name = 'A'); Database.insert(a, false); How should the code be altered to help debug the issue?

- A. Collect the insert method return value a Saveresult variable
- B. Add a System.debug() statement before the insert method
- C. Add a try/catch around the insert method
- D. Set the second insert method parameter to TRUE

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 24

Universal Hiring is using Salesforce to capture job applications. A salesforce administrator created two custom objects; Job c acting as the master object, Job application.___: acting as the detail.

What is the recommended tool a developer should use to meet the business requirement?

- A. Process Builder
- B. Apex trigger
- C. Formula field
- D. Record-triggered flow

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 25

which statement is true regarding execution order when triggers are associated to the same object and event?

- A. Trigger execution order cannot be guaranteed.
- B. Triggers are executed alphabetically by trigger name.
- C. executed In the order they are modified.
- D. Triggers are executed in the order they are created.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 26

Which three resources in an Aura Component can contain Javascript functions? Choose 3 answers

- A. Helper
- B. Renderer
- C. Controller

Answer: A,B,C ([LEAVE A REPLY](#))

NEW QUESTION: 27

A developer is creating an app that contains multiple Lightning web components.

One of the child components is used for navigation purposes. When a user click a button called.. component, the parent component must be alerted so it can navigate to the next page.

How should this be accomplished?

- A. Update a property on the parent.
- B. Create a custom event.
- C. Fire a notification.
- D. Call a method in the Apex controller.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 28

What can used to delete components from production?

- A. An ant migration tool deployment with a destructivechanges XML file and an empty package .xml file
- B. An ant migration tool deployment with destructivechanges xml file and the components to delete in the package .xml file
- C. A change set deployment with the delete option checked
- D. A change set deployment with a destructivechanges XML file

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 29

While writing a test class that covers an OpportunityLineItem trigger, a Developer is unable to create a standard PriceBook since one already exists in the org.

How should the Developer overcome this problem?

- A. Use @TestVisible to allow the test method to see the standard PriceBook.
- B. Use @IsTest(SeeAllData=true) and delete the existing standard PriceBook.
- C. Use Test.getStandardPricebookId() to get the standard PriceBook ID.
- D. Use Test.loadData() and a Static Resource to load a standard Pricebook.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 30

Universal Containers has an order system that uses an Order Number to identify an order for customer service agents. Order records will be imported into Salesforce.

How should the "Order Number" field be defined in Salesforce.

- A. Direct Lookup
- B. Lookup
- C. Indirect Lookup
- D. Number with External ID

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 31

A business has a proprietary Order Management System (OMS) that creates orders from their website and ... the order. When the order is created in the OMS, an integration also creates an order record in Salesforce ... relates it to the contact as identified by the email on the order. As the order goes through different stages in OMS, the integration also updates it in Salesforce. It is notified that each update from the OMS creates a new order record in Salesforce.

Which two actions prevent the duplicate order records from being created in Salesforce?

Choose 2 answers

- A. Write a before trigger on the order object to delete any duplicates.
- B. Ensure that the order number in the OMS is unique.
- C. Use the order number from the OMS as an external ID.
- D. Use the email on the contact record as an external ID.

Answer: A,B ([LEAVE A REPLY](#))

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here:

NEW QUESTION: 32

Which three steps allow a custom SVG to be included in a Lightning web component? Choose 3 answers

- A. Upload the SVG as a static resource.
- B. Reference the getter in the HTML template.
- C. Import the SVG as a content asset file.
- D. Import the static resource and provide a getter for it in JavaScript.
- E. Reference the import in the HTML template.

Answer: A,B,D (LEAVE A REPLY)

NEW QUESTION: 33

An Apex method, `getAccounts`, that returns a List of Accounts given a `searchTerm`, is available for Lightning Web components to use.

What is the correct definition of a Lightning Web component property that uses the `getAccounts` method?

- A.

```
@wire(getAccounts, { searchTerm: '$searchTerm' })  
accountList;
```
- B.

```
@AuraEnabled(getAccounts, '$searchTerm' )  
accountList;
```
- C.

```
@AuraEnabled(getAccounts, { searchTerm: '$searchTerm' })  
accountList;
```
- D.

```
@wire(getAccounts, '$searchTerm')  
accountList;
```

- A. Option C
- B. Option B
- C. Option D
- D. Option A

Answer: D (LEAVE A REPLY)

NEW QUESTION: 34

A developer is creating a Lightning web component to show a list of sales records.

The Sales Representative user should be able to see the commission-field on each record. The Sales Assistance user should be able to see all field on the record except the commission field.

How should this be enforced so that the component works for both users without showing any errors?

- A. Use security.stripInaccessible to remove fields inaccessible to the current user.
- B. Use with SECURITY_EMFoRCED in the SOQL that fetches the data for the component.
- C. Use Lightning Locker Service to enforce sharing rules and field-level security.
- D. Use Lightning Data Service to get the collection of sales records.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 35

developer created this Apex trigger that calls MyClass.myStaticMethod:
trigger myTrigger on Contact(before insert) (MyClass.myStaticMethod(trigger.new,
trigger.oldMap); } The developer creates a test class with a test method that calls
MyClass.mystaticMethod, resulting in 81% overall code coverage. What happens when the
developer tries to deploy the trigger and two classes to production, assuming no other code exist?

- A. The deployment fails because the Apex trigger has no code coverage.
- B. The deployment passes because both classes and the trigger were included in the deployment.
- C. The deployment passes because the Apex code has required (>75%) code coverage.
- D. The deployment fails because no assertions were made in the test method.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 36

A developer needs to join data received from an integration with an external system with parent records in Salesforce. The data set does not contain the Salesforce IDs of the parent records, but it does have a foreign key attribute that can be used to identify the parent.

Which action will allow the developer to relate records in the data model without knowing the Salesforce ID?

- A. Create a custom field on the child object of type Foreign Key
- B. Create and populate a custom field on the parent object marked as Unique
- C. Create and populate a custom field on the parent object marked as an External ID.
- D. Create a custom field on the child object of type External Relationship.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 37

Refer to the following Apex code:

```
Integer x = 0;
do {
    x = 1;
    x++;
} while (x < 1);
System.debug(x);
```

What is the value of x when it is written to the debug log?

- A. 3
- B. 2
- C. 0
- D. 1

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 38

An org tracks customer orders on an Order object and the items of an Order on the Line Item object. The Line Item object has a MasterDetail relationship to the order object. A developer has a requirement to calculate the order amount on an Order and the line amount on each Line item based on quantity and price.

What is the correct implementation?

- A. Implement the Line amount as a currency field and the order amount as a SUM formula field.
- B. Write a single before trigger on the Line Item that calculates the item amount and updates the order amount on the Order.
- C. Write a process on the Line item that calculates the item amount and order amount and updates the field on the Line Item and the order.
- D. Implement the line amount as a numeric formula field and the order amount as a roll-up summary field.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 39

Universal Containers (UC) decided it will not to send emails to support personnel directly from Salesforce in the event that an unhandled exception occurs. Instead, UC wants an external system be notified of the error. What is the appropriate publish/subscribe logic to meet these requirements?

- A. Have the external system subscribe to the BatchApexError event, no publishing is necessary.
- B. Publish the error event using the Eventbus.publish() method and have the external system subscribe to the event using CometD.

C. Publish the error event using the `addError()` method and have the external system subscribe to the event using CometD.

D. Publish the error event using the `addError()` method and write a trigger to subscribe to the event and notify the external system.

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 40

How should a developer write unit tests for a private method in an Apex class?

A. Add a test method in the Apex class.

B. Use the `SeeAllData` annotation.

C. Mark the Apex class as global.

D. Use the `TestVisible` annotation.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 41

In terms of the MVC paradigm, what are two advantages of implementing the layer of a Salesforce application using Aura Component-based development over Visualforce? Choose 2 answers

A. Automatic code generation

B. Self-contained and reusable units of an application

C. Rich component ecosystem

D. Server-side run-time debugging

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 42

Which statement should be used to allow some of the records in a list of records to be inserted if others fail to be inserted?

A. `insert (records, false)`

B. `Database.insert(records, false)`

C. `Database.insert(records, true)`

D. `insert records`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 43

Which two `sfdx` commands can be used to add testing data to a Developer sandbox?

A. `Forced: data:bulk:upsert`

B. `Forced: data: tree: upsert`

C. `Forced: data: object :upsert`

D. `Forced: data:async:upsert`

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 44

A developer needs to update an unrelated object when a record gets saved. Which two trigger types should the developer create?

- A. After insert
- B. Before update
- C. After update
- D. Before insert

Answer: B,D ([LEAVE A REPLY](#))

NEW QUESTION: 45

Which Apex class contains methods to return the amount of resources that have been used for a particular governor, such as the number of DML statements?

- A. OrgLimits
- B. Exception
- C. Messaging
- D. Limits

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 46

A developer has an integer variable called maxAttempts. The developer needs to ensure that once maxAttempts is initialized, it preserves its value for the length of the Apex transaction; while being able to share the variable's state between trigger executions. How should the developer declare maxAttempts to meet these requirements?

- A. Declare maxAttempts as a constant using the static and final keywords
- B. Declare maxAttempts as a member variable on the trigger definition.
- C. Declare maxAttempts as a private static variable on a helper class
- D. Declare maxAttempts as a variable on a helper class

Answer: A ([LEAVE A REPLY](#))

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here: <https://www.braindumps.com/Salesforce/TVB-450-practice-exam-dumps.html> (151 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 47

A developer is asked to explore if this automation can be implemented without writing any Apex code.

Which statement is true regarding this automation request?

- A. The developer can use Einstein Next Best Actions.
- B. The developer can use record triggered flow with Actions.
- C. The developer can use a record
- D. This approval step cannot be automated and must be done manually.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 48

An Approval Process is defined In the Expense__item__c object. A business rule dictates that whenever a ... clients the Status to Submitted on an Expense_Item__c record related to the expense report must enter the approval process individually.

A developers asked to explore if this automation can be implemented without writing any Apex code.

Which statement is true regarding this automation request?

- A. This approval step cannot be automated and must be done manually.
- B. The developer can use Einstein Next Best Actions
- C. This can only be automated with Apex code.
- D. The developer can use a record triggered flow with Actions.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 49

A developer Is Integrating with a legacy on-premise SQL database.

What should the developer use to ensure the data being Integrated is matched to the right records in Salesforce?

- A. Formula field
- B. External Object
- C. External ID field
- D. Lookup field

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 50

A developer has a Apex controller for a Visualforce page that takes an ID as a URL parameter.

How should the developer prevent a cross site scripting vulnerability?

- A. `String.ValueOf(ApexPages.currentPage() .getParameters() .get('url_param'))`
- B. `String.escapeSingleQuotes(ApexPages.currentPage() .getParameters(). get('url_param'))`
- C. `ApexPages.currentPage() .getParameters() .get('url_param') .escapeHtml4()`
- D. `ApexPages.currentPage() .getParameters() .get('url_param')`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 51

What will be the output in the debug log in the event of a QueryException during a call to the @query method in the following Example?

```
class myClass {
    class CustomException extends QueryException {}
    public static Account aQuery() {
        Account theAccount;
        try {
            system.debug('Querying Accounts.');
```

salesforce

```
            theAccount = [SELECT Id FROM Account WHERE CreatedDate > TODAY];
        }
        catch (CustomException eX) {
            system.debug('Custom Exception.');
```

exam-tests.com

```
        }
        catch (QueryException eX) {
            system.debug('Query Exception.');
```

```
        }
        finally {
            system.debug('Done.');
```

```
        }
        return theAccount;
    }
}
```

- A. Querying Accounts. Query Exception. Done
- B. Querying Accounts. Custom Exception.
- C. Querying Accounts. Query Exception.
- D. Querying Accounts. Custom Exception Done.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 52

A developer wrote the following two classes:

```

public with sharing class StatusFetcher {
    private Boolean active = true;
    private Boolean isActive() {
        return active;
    }
}

public with sharing class Calculator {
    public void doCalculations() {
        StatusFetcher sFetcher = new StatusFetcher();
        if(sFetcher.isActive()) {
            // do calculations here
        }
    }
}

```

The StatusFetcher class successfully compiled and saved. However, the Calculator class has a compile time error.

How should the developer fix this code?

- A. Change the class declaration for the statusFetcher class to public with inherited sharing.
- B. Change the class declaration for the Calculator class to public with inherited sharing.
- C. Make the doCalculations method in the Calculation class private.
- D. Make the isActive method in the StatusFetcher class public.

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 53

Which statement is true about developing in a multi-tenant environment?

- A. Governor limits prevent apex from impacting the performance of multiple tenants on the same instance
- B. Global apex classes can be referenced from multiple tenants on the same instance
- C. Org-level data security controls which users can see data from multiple tenants on the same instance
- D. Apex sharing controls access to records from multiple tenants on the same instance

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 54

Universal Container uses Salesforce to create orders.

When an order is created, it needs to sync with the in-house order fulfillment system. The order fulfillment system can accept SOAP messages over the HTTPS. If the connection fails, messages should be retried for up to 24 hours.

What is the recommended approach to sync the orders in Salesforce with the order fulfillment system?

- A. Write an Apex SOAP service to integrate with the order fulfillment system.
- B. Set up a Workflow Rule outbound message to the order fulfillment system.
- C. Use Process Bulkier to call an invocable Apex method that sends a message to the order fulfillment system.
- D. Create an after insert trigger on the Order object to make a callout to the order fulfillment system

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 55

Assuming that naze is 8 String obtained by an <apex:inpotText> tag on 8 Visualforce page, which two SOQL queries performed are safe from SOQL injection?

'Choose 2 answers

A)

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name + '%\'';
List<Account> results = Database.query(query);
```

B)

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + name.noQuotes() + '%\'';
List<Account> results = Database.query(query);
```

C)

```
String query = 'SELECT Id FROM Account WHERE Name LIKE \'' + String.escapeSingleQuotes(name) + '%\'';
List<Account> results = Database.query(query);
```

D)

```
String query = '%' + name + '%';
List<Account> results = (SELECT Id FROM Account WHERE Name LIKE :query);
```

- A. Option A
- B. Option C
- C. Option D
- D. Option B

Answer: B,C ([LEAVE A REPLY](#))

NEW QUESTION: 56

A developer wrote Apex code that calls out to an external system. How should a developer write the test to provide test coverage?

- A. Write a class that extends HTTPCalloutMock.
- B. Write a class that extends WebserviceMock
- C. Write a class that implements the HTTPCalloutMock interface.
- D. Write a class that implements the WebserviceMock interface.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 57

A Salesforce Administrator is creating a record-triggered flow. When certain criteria are met, the flow must call an Apex method to execute complex validation involving several types of objects. When creating the Apex method, which annotation should a developer use to ensure the method can be used within the flow?

- A. @future
- B. @InvocableMethod
- C. @RemoteAction
- D. @AuraEnabled

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 58

The following code snippet is executed by a Lightning web component in an environment with more than 2,000 lead records:

```
@AuraEnabled
salesforce
public void static updateLeads(){
    for(Lead thisLead : [SELECT Origin__c FROM Lead]){
        thisLead.LeadSource = thisLead.Origin;
        update thisLead;
    }
}
```

Which governor limit will likely be exceeded within the Apex transaction?

- A. Total number of DML statement issued
- B. Total number of SOQL queries issued
- C. Total number of records retrieved by SOQL queries
- D. Total number of records processed as a result of DML statements

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 59

How can a developer check the test coverage of active Process Builder and Flows deploying them in a Changing Set?

- A. Use the code Coverage Setup page
- B. Use the Flow properties page.
- C. Use the Apex testresult class
- D. Use SOQL and the Tooling API

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 60

Which statement generates a list of Leads and Contacts that have a field with the phrase 'ACME'?

- A. Map <sObject> searchList = (FIND "*"ACME*" IN ALL FIELDS RETURNING Contact, Lead);
- B. List <sObject> searchList = (FIND "*"ACME*" IN ALL FIELDS RETURNING Contact, Lead);
- C. List<List < sObject>> searchList = (SELECT Name, ID FROM Contact, Lead WHERE Name like '%ACME%');
- D. List<List <sObject>> searchList = (FIND "*"ACME*" IN ALL FIELDS RETURNING Contact, Lead);

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 61

A developer is asked to create a Visualforce page for Opportunities that allows users to save or merge the current record.

Which approach should the developer to meet this requirement?

- A. A custom controller
- B. A custom controller extension
- C. Standard controller methods
- D. Visualforce page JavaScript

Answer: A ([LEAVE A REPLY](#))

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here: <https://www.braindumpsPass.com/Salesforce/TVB-450-practice-exam-dumps.html> (151 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 62

What are three techniques that a developer can use to invoke an anonymous block of code? (Choose three.)

- A. Type code into the Developer Console and execute it directly.
- B. Run code using the Anonymous Apex feature of the Developer's IDE.
- C. Create a Visualforce page that uses a controller class that is declared without sharing.
- D. Use the SOAP API to make a call to execute anonymous code.
- E. Create and execute a test method that does not specify a runAs() call.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 63

Which two are best practices when it comes to component and application event handling?
(Choose two.)

- A. Reuse the event logic in a component bundle, by putting the logic in the helper.
- B. Handle low-level events in the event handler and re-fire them as higher-level events.
- C. Use component events to communicate actions that should be handled at the application level.
- D. Try to use application events as opposed to component events.

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 64

Universal Containers decides to use exclusively declarative development to build out a new Salesforce application. Which three options should be used to build out the database layer for the application? Choose 3 answers

- A. Process Builder
- B. Triggers
- C. Roll-Up Summaries
- D. Custom Objects and Fields
- E. Relationships

Answer: A,C,E ([LEAVE A REPLY](#))

NEW QUESTION: 65

Universal Containers wants to back up all of the data and attachments in its Salesforce org once month. Which approach should a developer use to meet this requirement?

- A. Use the Data Loader command line.
- B. Create a Schedulable Apex class.
- C. Schedule a report.
- D. Define a Data Export scheduled job.

Answer: ([SHOW ANSWER](#))

Scheduling a Data Export job is the best way to back up all the data and attachments in a Salesforce org once a month. The Data Export job can be scheduled to run at a certain frequency so that the data can be backed up on a regular basis. This makes it easy to restore the data in case of any emergency.

NEW QUESTION: 66

A developer creates a custom exception as shown below:

What are two ways the developer can fire the exception in Apex? Choose 2 answers

- A. Throw new ParityException (parity does not match);
- B. Throw new parityException ();
- C. New ParityException();
- D. New ParityException (parity does not match);

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 67

A large corporation stores Orders and Line Items in Salesforce for different lines of business. Users are able to see Orders across the entire organization, but, for security purposes, should only be able to see the Line Items in their line of business.

Which type of relationship should be used between Line Items and Orders?

- A. Master-Detail
- B. Indirect Lookup
- C. Lookup
- D. Direct Lookup

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 68

A custom picklist field, Food_Preference__c, exists on a custom object. The picklist contains the following options: 'Vegan', 'Kosher', 'No Preference'. The developer must ensure a value is populated every time a record is created or updated. What is the most efficient way to ensure a value is selected every time a record is saved?

- A. Mark the field as Required on the field definition.
- B. Set a validation rule to enforce a value is selected.
- C. Mark the field as Required on the object's page layout.
- D. Set "Use the first value in the list as the default value" as True.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 69

A developer needs to implement the functionality for a service agent to gather multiple pieces of information from a customer in order to send a replacement credit card.

Which automation tool meets these requirements?

- A. Flow Builder

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 70

What are three ways for a developer to execute tests in an org? Choose 3.

- A. Bulk API
- B. Tooling API
- C. Setup Menu
- D. Salesforce DX
- E. Metadata API.

Answer: B,C,D ([LEAVE A REPLY](#))

https://developer.salesforce.com/docs/atlas.en-us.sfdx_dev.meta/sfdx_dev/sfdx_dev_testing.htm

<https://developer.salesforce.com/docs/atlas.en-us>

[us.api_tooling.meta/api_tooling/tooling_api_objects_apextestsuite.htm](https://developer.salesforce.com/docs/atlas.en-us.api_tooling.meta/api_tooling/tooling_api_objects_apextestsuite.htm)

NEW QUESTION: 71

Universal Containers has large number of custom applications that were built using a third-party JavaScript framework and exposed using Visualforce pages. The Company wants to update these applications to apply styling that resembles the look and feel of Lightning Experience. What should the developer do to fulfill the business request in the quickest and most effective manner?

- A. Rewrite all Visualforce pages as Lightning components.
- B. Set the attribute enableLightning to true in the definition.
- C. Incorporate the Salesforce Lightning Design System CSS stylesheet into the JavaScript applications.
- D. Enable Available for Lightning Experience, Lightning Communities, and the mobile app on Visualforce pages used by the custom application.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 72

Universal Containers (UC) uses a custom object called Vendor. The Vendor custom object has a master-detail relationship with the standard Account object.

Based on some internal discussions, the UC administrator tried to change the master-detail relationship to a lookup relationship, but was not able to do so.

What is a possible reason that this change was not permitted?

- A. Some of the Vendor records have null for the Account field.
- B. The Account object does not allow changing a field type for a custom field.
- C. The Account object has a roll-up summary field on the Vendor object.
- D. The organization wide default for the Vendor object is Public Read/Write.

Answer: (SHOW ANSWER)

NEW QUESTION: 73

A Lightning component has a wired property, searchResults, that stores a list of Opportunities. Which definition of the Apex method, to which the searchResults property is wired, should be used?

- A. `@AuraEnabled(cacheable=false) public List<Opportunity> search(String term) { /*implementation*/ }`
- B. `@AuraEnabled(cacheable=false) public static List<Opportunity> search(String term) { /*implementation*/ }`
- C. `@AuraEnabled(cacheable=true) public static List<Opportunity> search(String term) { /* implementation*/ }`
- D. `@AuraEnabled(cacheable=true) public List<Opportunity> search(String term) { /*implementation*/ }`

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 74

A workflow updates the value of a custom field for an existing Account.

How can a developer access the updated custom field value from a trigger?

- A. By writing, a Before Update trigger and accessing the field value from Trigger.new
- B. By writing a Before Insert trigger and accessing the field value from Trigger.new
- C. By writing an After Update trigger and accessing the field value from Trigger.old
- D. By writing an After Insert trigger and accessing the field value from Trigger.old

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 75

A developer is creating a page that allows users to create multiple Opportunities. The developer is asked to verify the current user's default } | Opportunity record type, and set certain default values based on the record type before inserting the record.

How can the developer find the current user's default record type? ns

- A. Use the Schema.userInfo.Opportunity.getDefaultRecordType() method. < Create the opportunity and check the opportunity.recordType before inserting, which will have the record ID of the current Dal user's default record type.
- B. Use Opportunity. SObjectType.getDescribe().getRecordTypeInfo() to get a list of record types, and iterate through them until [J isDefaultRecordTypeMapping() is true. Pencil & Paper |
- C. Query the Profile where the ID equals userInfo.getProfileID() and then use the profile.Opportunity.getDefaultRecordType() | |method.] |

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 76

A Lightning component has a wired property, searchResults, that stores a list of Opportunities. Which definition of the Apex method, to which the searchResults property is wired, should be used?

- A. @AuraEnabled(cacheable=false)
public List<Opportunity> search(String term) { /*implementation*/ }
- B. @AuraEnabled(cacheable=true)
public static List<Opportunity> search(String term) { /* implementation*/ }
- C. @AuraEnabled(cacheable=false)
public static List<Opportunity> search(String term) { /*implementation*/ }
- D. @AuraEnabled(cacheable=true)
public List<Opportunity> search(String term) { /*implementation*/ }

Answer: ([SHOW ANSWER](#))

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here:

NEW QUESTION: 77

Universal Containers implemented a private sharing model for the Account object. A custom Account search tool was developed with Apex to help sales representatives find accounts that match multiple criteria they specify. Since its release, users of the tool report they can see Accounts they do not own. What should the developer use to enforce sharing permission for the currently logged-in user while using the custom search tool?

- A. Use the schema describe calls to determine if the logged-in users has access to the Account object.
- B. Use the without sharing keyword on the class declaration.
- C. Use the UserInfo Apex class to filter all SOQL queries to returned records owned by the logged-in user.
- D. Use the with sharing keyword on the class declaration.

Answer: D (LEAVE A REPLY)

Use the with sharing keyword on the class declaration. The with sharing keyword ensures that the Apex code respects the object-level, field-level, and record-level sharing settings for the user who is running the Apex code. This means that the code will only return records that the user has access to, according to their Sharing Settings. You can find more information about the with sharing keyword in the official Salesforce documentation (https://developer.salesforce.com/docs/atlas.en-us.apexcode.meta/apexcode/apex_classes_keywords_sharing.htm).

NEW QUESTION: 78

A developer has the following requirements:

Calculate the total amount on an Order.

Calculate the line amount for each Line Item based on quantity selected and price.

Move Line Items to a different Order if a Line Item is not stock.

Which relationship implementation supports these requirements?

- A. Order has a Master-Detail field to Line Item and there can be many Line Items per Order.
- B. Order has a Lookup field to Line Item and there can be many Line Items per Order.
- C. Line Items has a Master-Detail field to Order and the Master can be re-parented.
- D. Line Item has a Lookup field to Order and there can be many Line Items per Order

Answer: C (LEAVE A REPLY)

NEW QUESTION: 79

What should a developer use to obtain the Id and Name of all the Leads, Accounts, and Contacts that have the company name "Universal Containers"?

- A. FIND Universal Containers' IN CompanyName Fields RETURNING lead{Id, name), accounted, name), contacted, name)

B. SELECT lead(id, name). accountOd, name), contacted, name) FROM Lead, Account, Contact WHERE Name = "universal Containers'

C. SELECT Lead.id. Lead.Name, Account.Id, AccountName, Contacted, Contact.Name FROM Lead, Account, Contact WHERE CompanyName * Universal Containers'

D. FIND 'Universal Containers' IN Name Fields RETURNING leadjid, name), accounted, name), contacted, name)

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 80

A developer created a new trigger that inserts a Task when a new Lead is created. After deploying to production, an outside integration that reads task records is periodically reporting errors.

Which change should the developer make to ensure the integration is not affected with minimal impact to business logic?

A. Remove the Apex class from the integration user's profile.

B. Deactivate the trigger before the integration runs.

C. Use a try-catch block after the insert statement.

D. Use the Database method with all or None set to false

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 81

A developer wants to mark each Account in a List<Account> as either or Inactive based on the LastModified field value being more than 90 days.

Which Apex technique should the developer use?

A. A for loop, with a switch statement inside

B. A Switch statement, with a for loop inside

C. A for loop, with an if/else statement inside

D. An If/else statement, with a for loop inside

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 82

code below deserializes input into a list of Accounts.

```

01 public class AcctCreator {
02     public void insertAccounts() {
03         String acctsJson = getAccountsJson();
04         List<Account> accts = (List<Account>) JSON.deserialize(acctsJson,
List<Account>.class);
05
06         // DML to insert accounts
07     }
08     // ... other code including getAccountJson implementation
09 }

```

Which code modification should be made to insert the Accounts so that field-level security is respected?

- A. 05: Accts = database.stripInaccessible (accts, Database. CREATEABLE);
- B. 05: SubjectAccessDecision sd= Security.stripInaccessible(AccessType,CREATABLE,
- C. 05: If (SubjectType.Account, isCreatable())
- D. 01: Public with sharing class AcctCreator

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 83

A development team wants to use a deployment script to automatically deploy to a sandbox during their development cycles.

Which two tools can they use to run a script that deploys to a sandbox?

Choose 2 answers

- A. SFDX CLI
- B. Developer Console
- C. Ant Migration Tool
- D. Change Sets

Answer: A,C ([LEAVE A REPLY](#))

NEW QUESTION: 84

A developer has to identify a method in an Apex class that performs resource intensive actions in memory by iterating over the result set of a SOQL statement on the account. The method also performs a SOQL statement to save the changes to the database.

Which two techniques should the developer implement as a best practice to ensure transaction control and avoid exceeding governor limits?

Choose 2 answers

- A. Use Partial DML statements to ensure only valid data is committed.
- B. Use the @ReadOnly annotation to bypass the number of rows returned by a SOQL.
- C. Use the Database.Savepoint method to enforce database integrity.
- D. Use the System.Limit class to monitor the current CPU governor limit consumption.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 85

A developer must build application that tracks which Accounts have purchase specific pieces of equal products. Each Account could purchase many pieces of equipment.

How should the developer track that an Account has purchased a piece of equipment.

- A. Use a Master-Detail on Product to Account
- B. Use a Custom object.
- C. Use the Asset object.
- D. Use a Lookup on Account to product.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 86

Get Cloudy Consulting (GCC) has a multitude of servers that host its customers' websites. GCC wants to provide a servers status page that is always on display in its call center. It should update in real time with any changes made to any servers. To accommodate this on the server side, a developer created a server Update platform event.

The developer is working on a Lightning web component to display the information.

- A. `import (subscribe, unsubscribe, onError) from 'lightning/empApi '`
- B. `import (subscribe, unsubscribe, onError) from 'lightning/MessageChannel'`
- C. `import (subscribe, unsubscribe, onError) from 'lightning/ServerUpdate'`
- D. `import (subscribe, unsubscribe, onError) from 'lightning/pubsub'`

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 87

Refer to the following code snippet for an environment has more than 200 Accounts belonging to the Technology' industry:

```
for(Account thisAccount : [Select Id, Industry FROM Account LIMIT 150]){
    if(thisAccount.Industry == 'Technology'){
        thisAccount.Is_Tech__c = true;
    }
    update thisAccount;
}
```

When the code execution, which two events occur as a result of the Apex transaction?

When the code executes, which two events occur as a result of the Apex transaction?

Choose 2 answers

- A. If executed in an asynchronous context, the apex transaction is likely to fail by exceeding the DML governor limit
- B. If executed In a synchronous context, the apex transaction is likely to fail by exceeding the DHL governor limit.
- C. The Apex transaction fails with the following message. "SObject row was retrieved via SOQL without querying the requested field Account.Is.Tech__c".

D. The Apex transaction succeeds regardless of any uncaught exception and all processed accounts are updated.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 88

How can a developer implement this feature?

- A. Build a workflow rule.
- B. Build an account assignment rule.
- C. Build a flow with Flow Builder.
- D. Build an account approval process.

Answer: C ([LEAVE A REPLY](#))

NEW QUESTION: 89

What should a developer do to check the code coverage of a class after running all tests?

- A. View Use code coverage percentage for the class using the Overall Code Coverage panel in the Developer Console Tests tab.
- B. Select and run the class on the Apex Test Execution page in the Developer Console.
- C. View the Class Test Percentage tab on the Apex Class list view in Salesforce Setup.
- D. View the Code Coverage column in the list view on the Apex Classes page.

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 90

A developer is tasked with performing a complex validation using Apex as part of advanced business logic. certain criteria are met for a PurchaseOrder, the developer must throw a custom exception.

What is the correct way for the developer to declare a class that can be used as an exception?

- A. `public class PurchaseOrderException implements Exception ()`
- B. `public class PurchaseOrderException extends Exception ()`
- C. `public class PurchaseOrder extends Exception ()`
- D. `public class PurchaseOrder implements Exception ()`

Answer: ([SHOW ANSWER](#)**)**

NEW QUESTION: 91

A developer has a VF page and custom controller to save Account records. The developer wants to display any validation rule violation to the user. How can the developer make sure that validation rule violations are displayed?

- A. Add custom controller attributes to display the message.
- B. Include `<apex:messages>` on the Visualforce page.
- C. Use a try/catch with a custom exception class.
- D. Perform the DML using the Database.upsert() method

Answer: B ([LEAVE A REPLY](#))

https://developer.salesforce.com/docs/atlas.en-us.pages.meta/pages/pages_compref_message.htm

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here: <https://www.braindumpsPASS.com/Salesforce/TVB-450-practice-exam-dumps.html> (151 Q&As Dumps, **40%OFF Special Discount: Exam-Tests**)

NEW QUESTION: 92

What can be used to override the Account's standard Edit button for Lightning Experience?

- A. Lightning action
- B. Lightning component
- C. Lightning page
- D. Lightning flow

Answer: (SHOW ANSWER)

A Lightning Component can be used to override the Account's standard Edit button for Lightning Experience. This allows the developer to create a custom page with custom fields and custom functionality that can be used instead of the standard Edit page. It also allows for the creation of custom navigation and buttons to make the user experience more intuitive and efficient.

Reference: <https://trailhead.salesforce.com/en/content/learn/projects/quick-start-lightning-components>

NEW QUESTION: 93

Given the following trigger implementation:

```
trigger leadTrigger on Lead (before update){
final ID BUSINESS_RECORDTYPEID = '012500000009Qad';
for(Lead thisLead : Trigger.new){
if(thisLead.Company != null && thisLead.RecordTypeId != BUSINESS_RECORDTYPEID)
{ thisLead.RecordTypeId = BUSINESS_RECORDTYPEID;
}
}
}
```

The developer receives deployment errors every time a deployment is attempted from Sandbox to Production.

What should the developer do to ensure a successful deployment?

- A. Ensure a record type with an ID of BUSINESS_RECORDTYPEID exists on Production prior to deployment.

- B. Ensure the deployment is validated by a System Admin user on Production.
- C. Ensure BUSINESS_RECORDTYPEID is retrieved using Schema.Describe calls.
- D. Ensure BUSINESS_RECORDTYPEID is pushed as part of the deployment components.

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 94

Which process automation should be used to send an outbound message without using Apex code?

- A. Workflow Rule
- B. Flow Builder
- C. Approval Process
- D. Process Builder

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 95

A Next Best Action strategy uses an Enhance Element that invokes an Apex method to determine a discount level for a Contact, based on a number of factors. What is the correct definition of the Apex method?

- A. @InvocableMethod

```
global Recommendation getLevel (ContactWrapper input)
{ /*implementation*/ }
```

- B. @InvocableMethod

```
global static List<List<Recommendation>> getLevel(List<ContactWrapper> input)
{ /*implementation*/ }
```

- C. @InvocableMethod

```
global List<List<Recommendation>> getLevel(List<ContactWrapper> input)
{ /*implementation*/ }
```

- D. @InvocableMethod

```
global static ListRecommendation getLevel(List<ContactWrapper> input)
{ /*implementation*/ }
```

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 96

A developer needs to prevent the creation of Request_c records when certain conditions exist in the system. A RequestLogic class exists to checks the conditions. What is the correct implementation?

- A. Trigger RequestTrigger on Request (before insert) {
RequestLogic.validateRecords {trigger.new};
}

- B. Trigger RequestTrigger on Request (after insert) {
if (RequestLogic.isValid{Request})

```
Request.addError {"Your request cannot be created at this time."};
}
```

```
C. Trigger RequestTrigger on Request (after insert) {
RequestLogic.validateRecords {trigger.new};
}
```

```
D. Trigger RequestTrigger on Request (before insert) {
if (RequestLogic.isvalid{Request})
Request.addError {"Your request cannot be created at this time."};
}
```

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 97

Which three operations affect the number of times a trigger can fire?

Choose 3 answers

- A. Email messages
- B. Criteria-based Sharing calculations
- C. Process Flows
- D. Roll-Up Summary fields
- E. Workflow Rules

Answer: C,D,E ([LEAVE A REPLY](#))

NEW QUESTION: 98

A developer is creating a test coverage for a class and needs to insert records to validate functionality. Which method annotation should be used to create records for every method in the test class?

- A. @BeforeTest
- B. @PreTest
- C. @isTest(SeeAllData=True)
- D. @TestSetup

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 99

The Salesforce Administrator created a custom picklist field, Account_status_c, on the a Account object. This picklist has possible values of "Inactive" and "Active"?

As part of a new business process, management wants to ensure an opportunity record is created only for Accounts marked as "Active". A developer is asked to implement this business requirement.

Which two automation tools should be used to fulfill the business need?

Choose 2 answers

- A. Salesforce Flow
- B. Process Builder

C. Approval Process

D. Workflow Rules

Answer: A,B ([LEAVE A REPLY](#))

NEW QUESTION: 100

What are two ways a developer can get the status of an enqueued job for a class that implements the Queueable interface? Choose 2 answers

A. View the apex Jobs page

B. Query the AsyncApexJob object

C. View the apex flex Queue

D. View the apex status Page

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 101

A developer must create a lightning component that allows users to input contact record information to create a contact record, including a salary__c custom field. What should the developer use, along with a lightning-record-edit form, so that salary__c field functions as a currency input and is only viewable and editable by users that have the correct field-level permissions on salary__c?

A. `<lightning-input type="number" value="Salary__c" formatter="currency">`
`</lightning-input>`

B. `<lightning-input-currency value="Salary__c">`
`</lightning-input-currency>`

C. `<lightning-formatted-number value="Salary__c" format-style="currency">`
`</lightning-formatted-number>`

D. `<lightning-input-field field-name="Salary__c">`
`</lightning-input-field>`

Answer: D ([LEAVE A REPLY](#))

NEW QUESTION: 102

A developer wants a list button to display a Visualforce page that allows users to edit multiple records which Visualforce feature supports this requirement.

A. Recordsetvar page attribute

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 103

A developer is creating a page that allows users to create multiple Opportunities. The developer is asked to verify the current user's default Opportunity record type, and set certain default values based on the record type before inserting the record. How can the developer find the current user's default record type?

- A. Query the Profile where the ID equals `userInfo.getProfileID()` and then use the `profile.Opportunity.getDefaultRecordType()` method.]]
- B. Use `Opportunity.SObjectType.getDescribe().getRecordTypeInfo()` to get a list of record types, and iterate through them until `[J isDefaultRecordTypeMapping()` is true. Pencil & Paper |
- C. Use the `Schema.userInfo.Opportunity.getDefaultRecordType()` method. < Create the opportunity and check the `opportunity.recordType` before inserting, which will have the record ID of the current Dal

Answer: B (LEAVE A REPLY)

user's default record type.

NEW QUESTION: 104


Which aspect of Apex programming is limited due to multitenancy?

- A. The number of records processed in a loop
- B. The number of records returned from database queries
- C. The number of active Apex classes
- D. The number of methods in an Apex Class

Answer: B (LEAVE A REPLY)

NEW QUESTION: 105

A developer created these three Rollup Summary fields in the custom object, Project_ct,

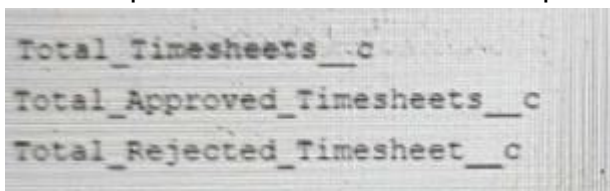

The developer is asked to create a new field that shows the ratio between rejected and approved timesheets for a given project.

Which should the developer use to Implement the business requirement in order to minimize maintenance overhead?

- A. Record-triggered Flow
- B. Process Builder
- C. Formula field
- D. Apex Trigger

Answer: C (LEAVE A REPLY)

Valid TVB-450 Dumps shared by BraindumpsPass.com for Helping Passing TVB-450 Exam! BraindumpsPass.com now offer the **newest TVB-450 exam dumps**, the BraindumpsPass.com TVB-450 exam **questions have been updated** and **answers have been corrected** get the **newest** BraindumpsPass.com TVB-450 dumps with Test Engine here:

<https://www.braindumpspass.com/Salesforce/TVB-450-practice-exam-dumps.html> (151 Q&As
Dumps, **40%OFF** Special Discount: **Exam-Tests**)